





3D VIEW

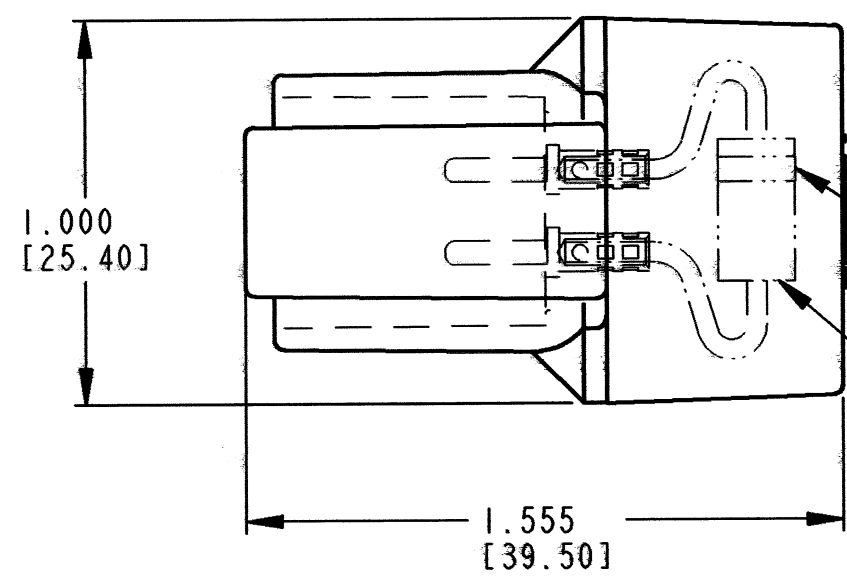

POLARITY STRIPE REFERENCE
MOLDED IN INTERNAL COMPONENT
DIODE MOTOROLA P/N MUR460G

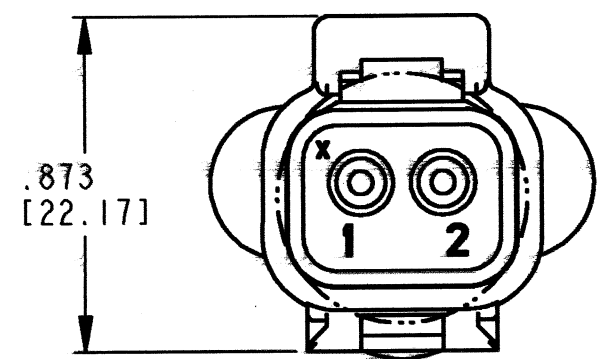

CIRCUIT DWG.

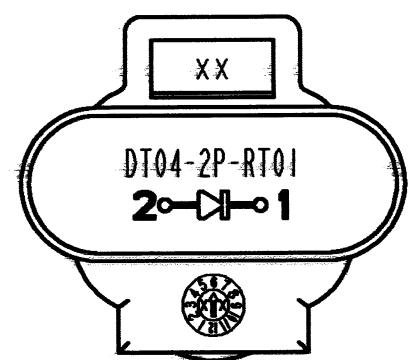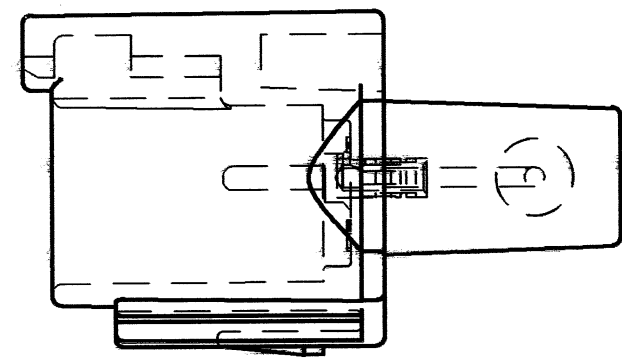

REV	
F	DT04-2P-RT01

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
C	REVISED PER E.O. P16218	7/30/99	CLW
D	REVISED PER E.O. P19162	3/15/06	R.D.R.
E	REVISED PER E.O. P19626	4/21/08	R.D.R.
F	REVISED PER E.O. P20499	5-27-10	ADR

- NOTES:
1. ALL DIMENSIONS ARE INCHES (METRIC).
 2. ALL DIMENSIONS W/O TOLERANCE ARE +/- .025 [+/- 0.63]
 3. RECEPTACLE MATES WITH DT06-2S-****.
 4. TEMPERATURE RANGE : -55°C TO +125°C.
 5. MOTOROLA DIODE P/N: MUR460G.
PEAK REVERSE VOLTAGE = 600.0 V MAX.
PEAK FORWARD VOLTAGE = 1.28 V MAX.
AVERAGE FORWARD CURRENT = 4.0 A MAX.
CONSULT THE FACTORY FOR DETAILED SPECIFICATIONS.
 6. MATERIAL: PLASTIC; COLOR: BLACK

SIGNATURE & DATE		2 WAY RECEPTACLE TERMINATOR DT SERIES	EP		MATL. CODE
DR	C.R.BUNKE 29JUL99		 3850 INDUSTRIAL AVE. HEMET, CA 92545		B DT04-2P-RT01
CHK	<i>[Signature]</i> 5/27/10				
PE	<i>[Signature]</i> 4/21/10				
APPD	<i>[Signature]</i> 5-26-10				
SCALE	NONE	WT	ENVELOPE		DWG SIZE
					CODE 11139
					SHEET OF