
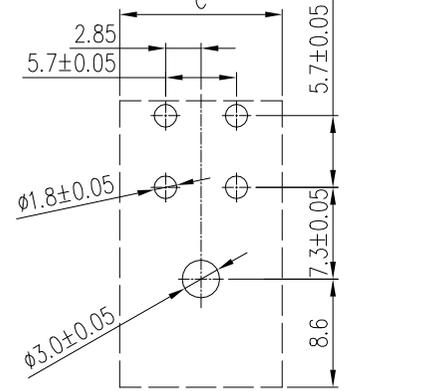
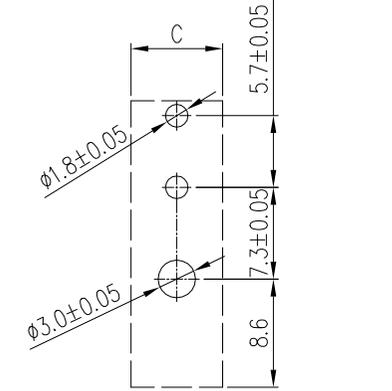


POS	DIM A	DIM B	DIM C
02	8.35	NA	9.35
04	12.05	5.7	13.05
06	17.75	11.4	18.75
08	23.45	17.1	24.45
10	29.15	22.8	30.15
12	34.85	28.5	35.45

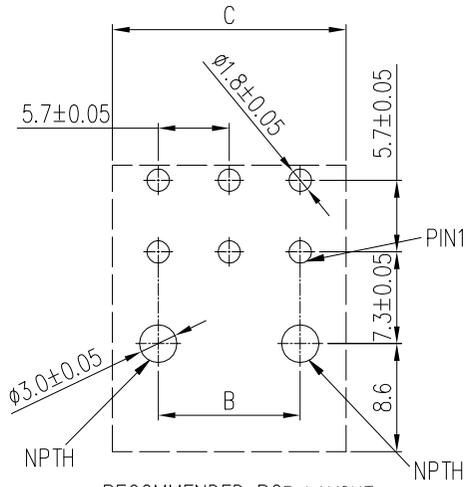

- NOTES:
- HOUSING: LCP UL94V-0, HALOGEN FREE, GLOW WIRE COMPATIBLE, BLACK.
  - RoHS COMPLIANT.
  - MATE WITH HOUSING P/N: 10142707.
  - PRODUCT SPEC: GS-12-1405.
  - PACKAGE SPEC: GS-14-2595.
  - THE HSU CAN WITHSTAND EXPOSURE TO 260°C PEAK TEMP FOR 10 SECONDS IN A REFLOW OVEN.
  - PART NUMBER:

10146997-XX X 0 X LF

NO OF POS. PACKAGE  
02~12 POS. 0: TRAY  
1: TAPE&REEL

MATERIAL: LCP

PLATING:

0: 30u" GOLD PLATING ON CONTACT AREA AND 100u" TIN PLATING ON SOLDER TAIL

1: 15u" GOLD PLATING ON CONTACT AREA AND 100u" TIN PLATING ON SOLDER TAIL

2: 100u" TIN PLATING OVER ALL

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection	product family
ltr		tolerances unless otherwise specified		mm	WTB
A	ecn no	dr	date	title	
		TONY	2018-04-11	MINITEK POWER 5.7 R/A HEADER	
B	ELX-N-30112	TONY	2018-05-07	dwg no	
				scale 2:1	sheet 1 of 2
				Amphenol FCI	size A3
				type Product Customer Drawing	
sheet index	revision sheet	B	B		
		1	2		

1

2 3


4

5


6

A


A




FOR 02P



FOR 04P



FOR 06P

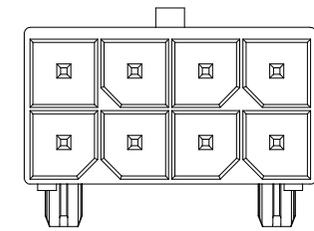


FOR 08P


B

B

Amphenol  
FCI

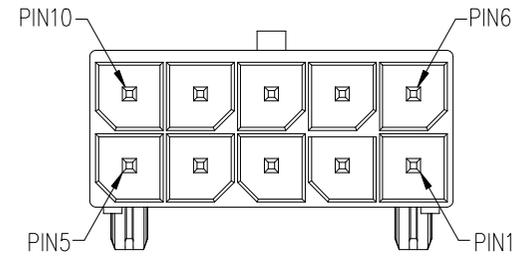

FOR 10P

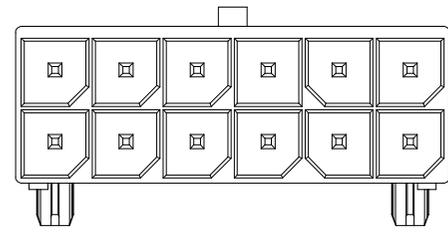

FOR 12P

C

C

© 2016 AFCI

D

D

mat'l. code		surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 1101	product family WTB	
ltr	ecn no	dr	date	tolerances unless otherwise specified	title MINITEK POWER 5.7 R/A HEADER	
				angles linear	mm	scale 2:1
				0°±2'		
		dr	TONY LENG	2018-04-11	Amphenol FCI	dwg no 10146997
		engr	TONY LENG	2018-04-11		
		chr	ZK HU	2018-04-11		
		appd	TIM YAO	2018-04-11		
sheet index	revision sheet	B 1	B 2			sheet 2 of 2
						size A3
						type Product Customer Drawing