
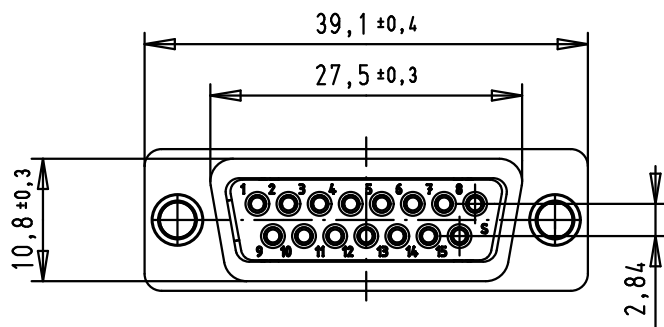




Performance level	PL2
Filter type	C
Capacitance	47pF±20%
Working Voltage	100V
Current Rating	7,5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	-
50	-
100	-
500	30dB
1000	35dB

				Dat.	Name		D-Sub, female, straight 15 Poles, turned solder buckets, with holes	Ma?Mstab/ Scale 1.5:1	
			Detail.	8-JUL-02	CV				
			Insp.	12/01/12	JB				
36283	12/01/12	SD	Stand.						All Dim. in mm Orig. Size DIN A 4
33250	03/11/05	JMDR	HARTING EURL F-95972 Paris					TB 09642117210	Blatt/ Page 1 / 1
31058	8-JUL-02	CV							
Mod.	Dat.	Name							