

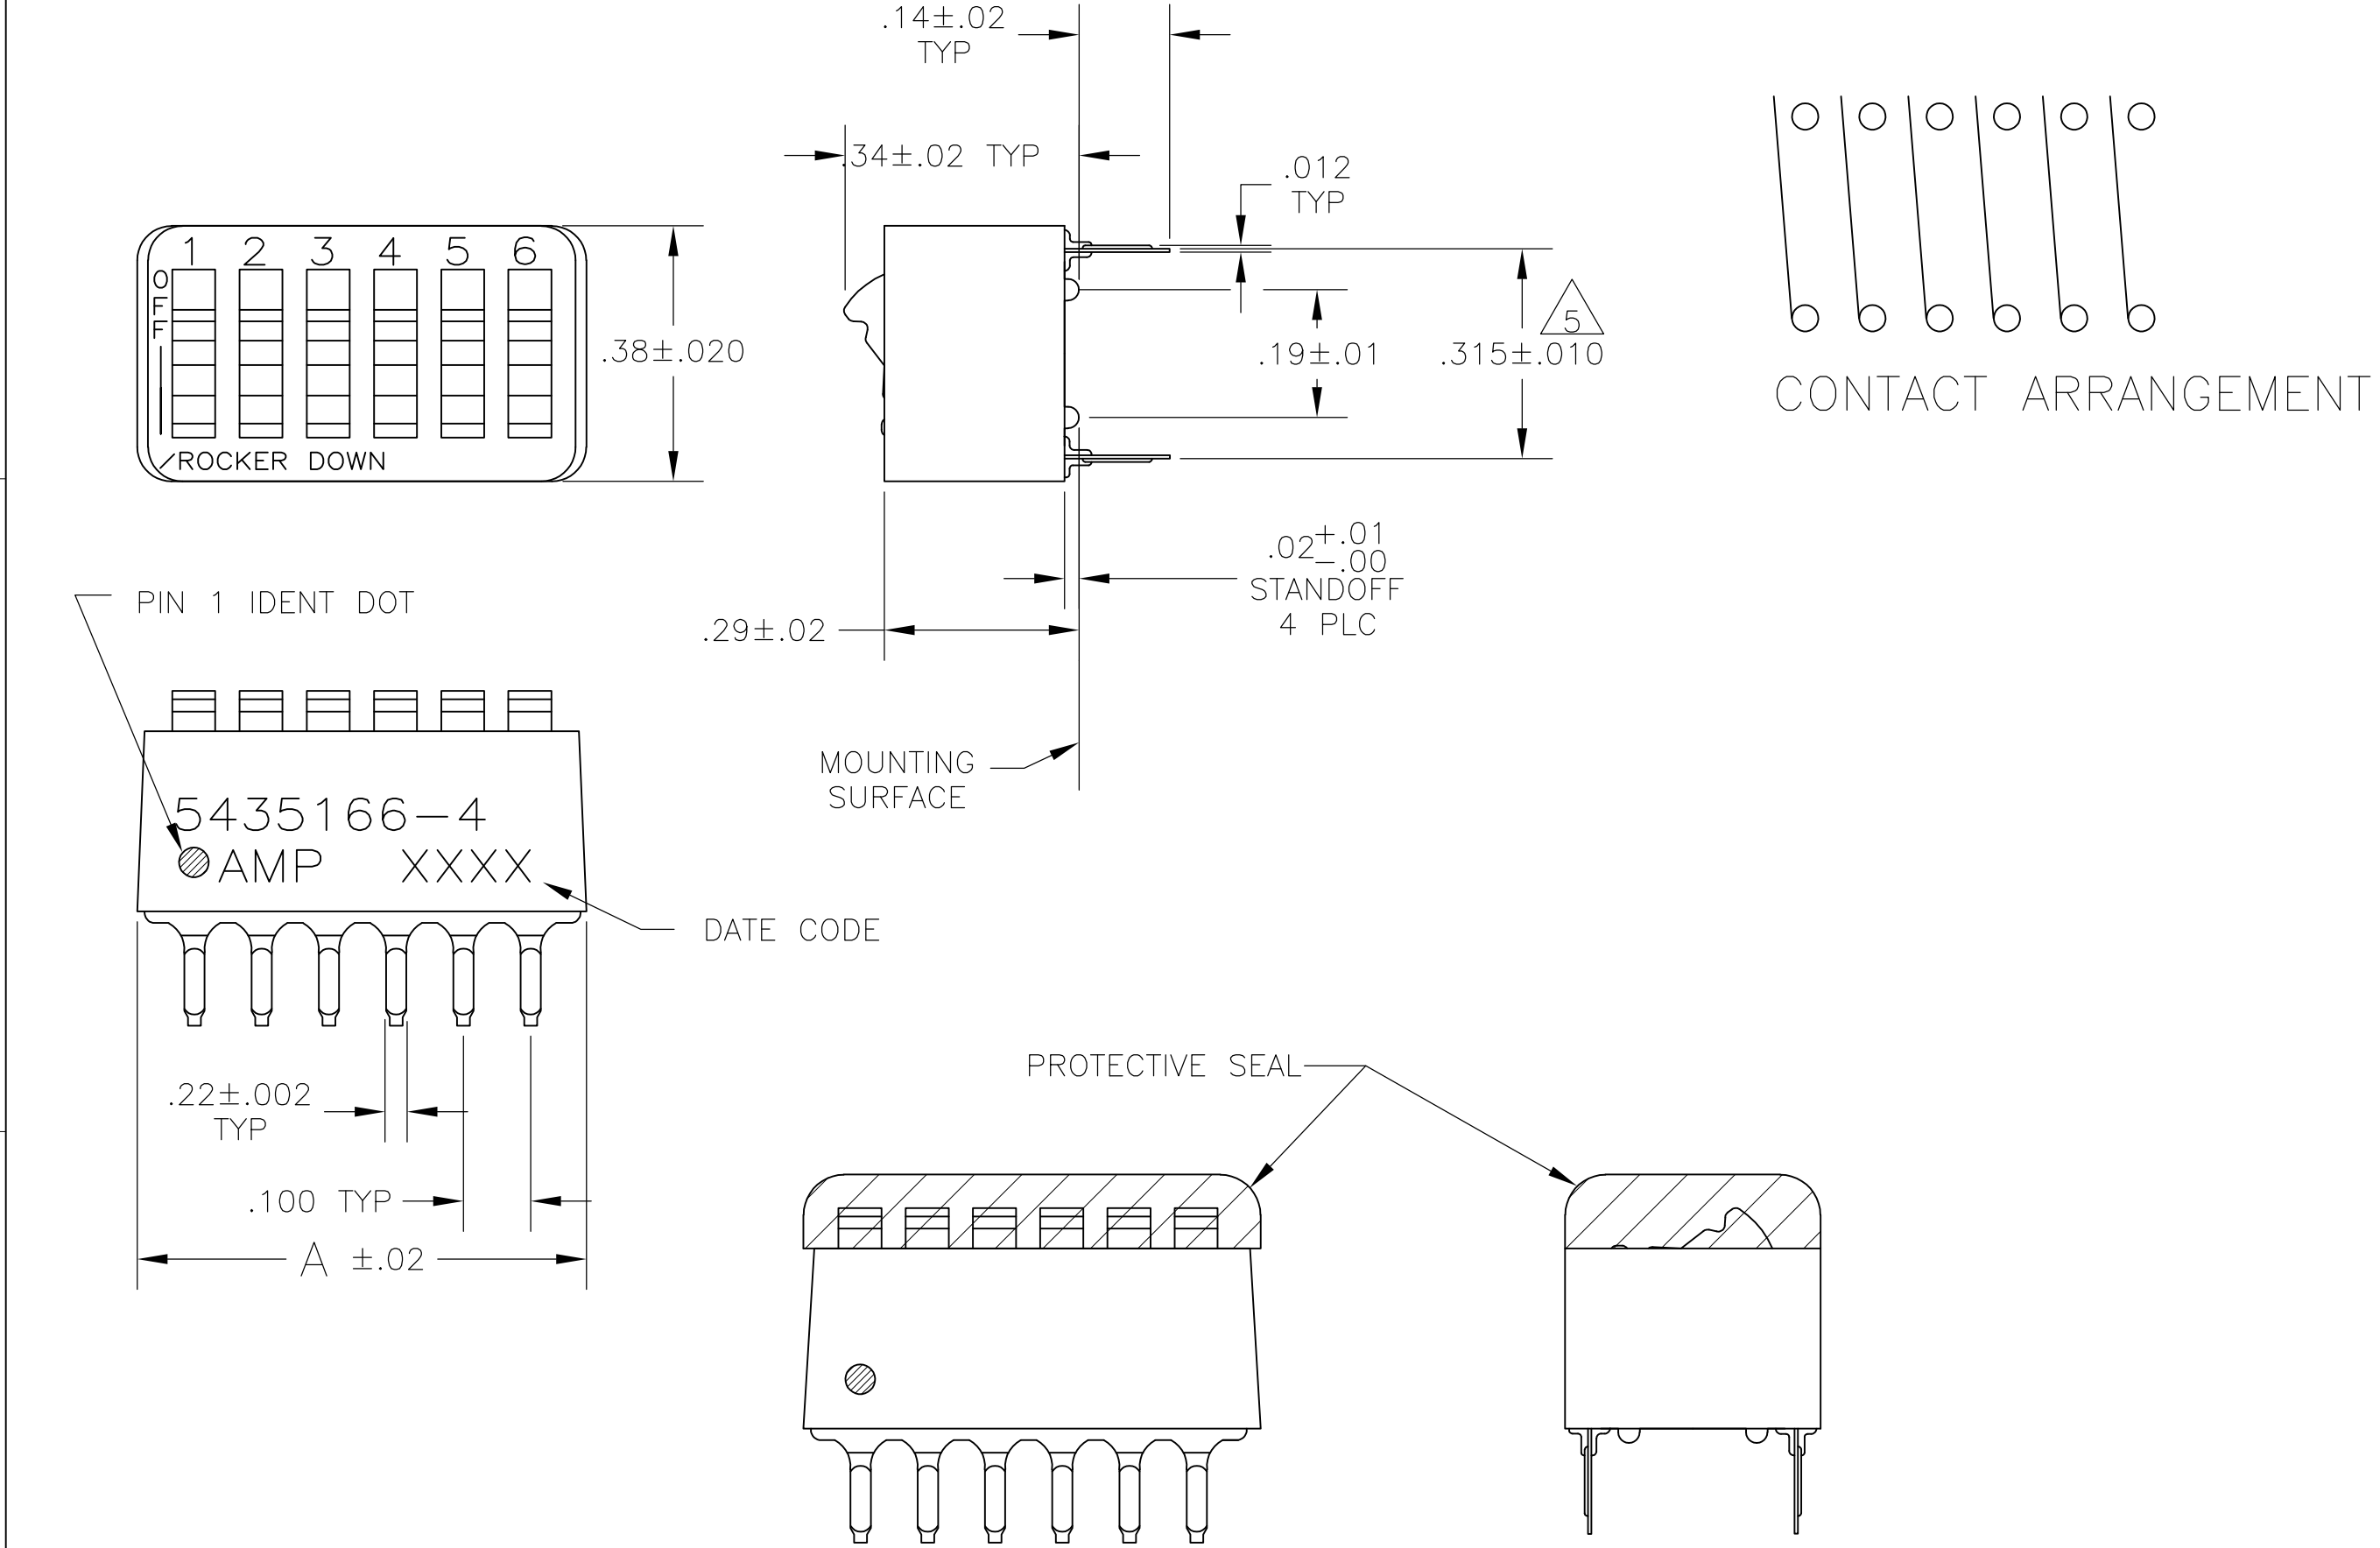


| LOC<br>AD | DIST<br>00 | REVISIONS |     |                           |         |     |      |
|-----------|------------|-----------|-----|---------------------------|---------|-----|------|
|           |            | P         | LTR | DESCRIPTION               | DATE    | DWN | APVD |
|           |            |           | A   | ECO-05-9575               | 27SEP05 | MB  | MS   |
|           |            |           | A1  | REVISED PER ECO-10-000444 | 19JAN10 | KK  | HMR  |

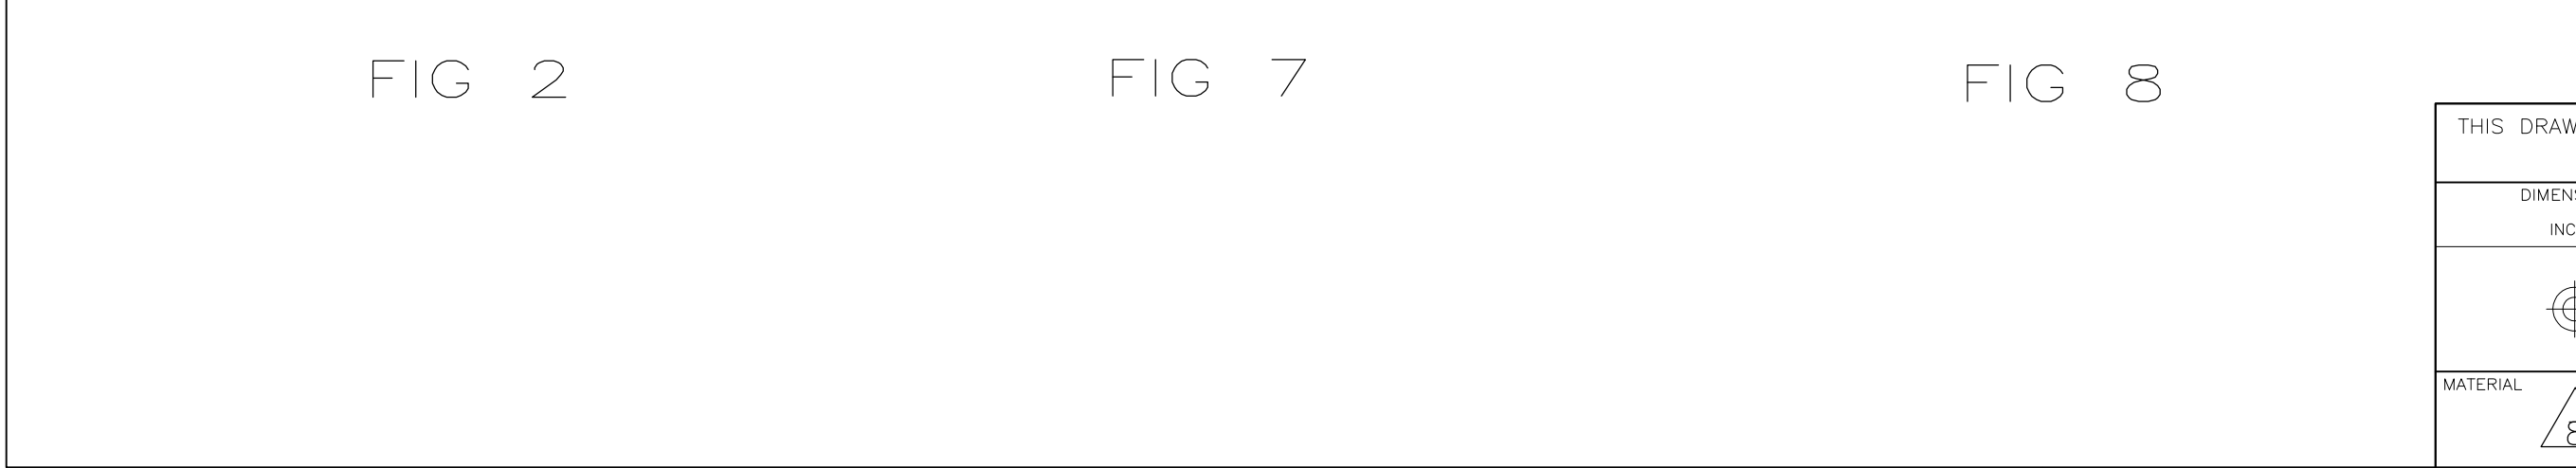

- FOR ADDITIONAL SPECIFICATIONS SEE AMP PRODUCT SPEC 108-7519.
- SWITCH SHOWN IN OPEN POSITION.
- ALL CHARACTERS AND ROCKERS ARE WHITE, HOUSING IS BLACK.
- STAMPING WILL VARY ON 2 AND 3 POSITION SIDES DUE TO SPACE RESTRICTIONS
- .315 DIMENSION APPLIES AT TERMINAL TIPS. TERMINALS ARE .300 +.010 AT MOUNTING SURFACE. -.000
- STRIPPABLE TRANSPARENT SEAL, SEE FIG 1.
- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002 /95/EC OF 27JAN2003 (ROHS).
- HOUSING AND ROCKERS-POLYESTER  
CONTACTS AND SOLDER LEADS-COPPER ALLOY
- CONTACTS-GOLD OVER NICKEL  
SOLDER LEADS-TIN OVER NICKEL
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

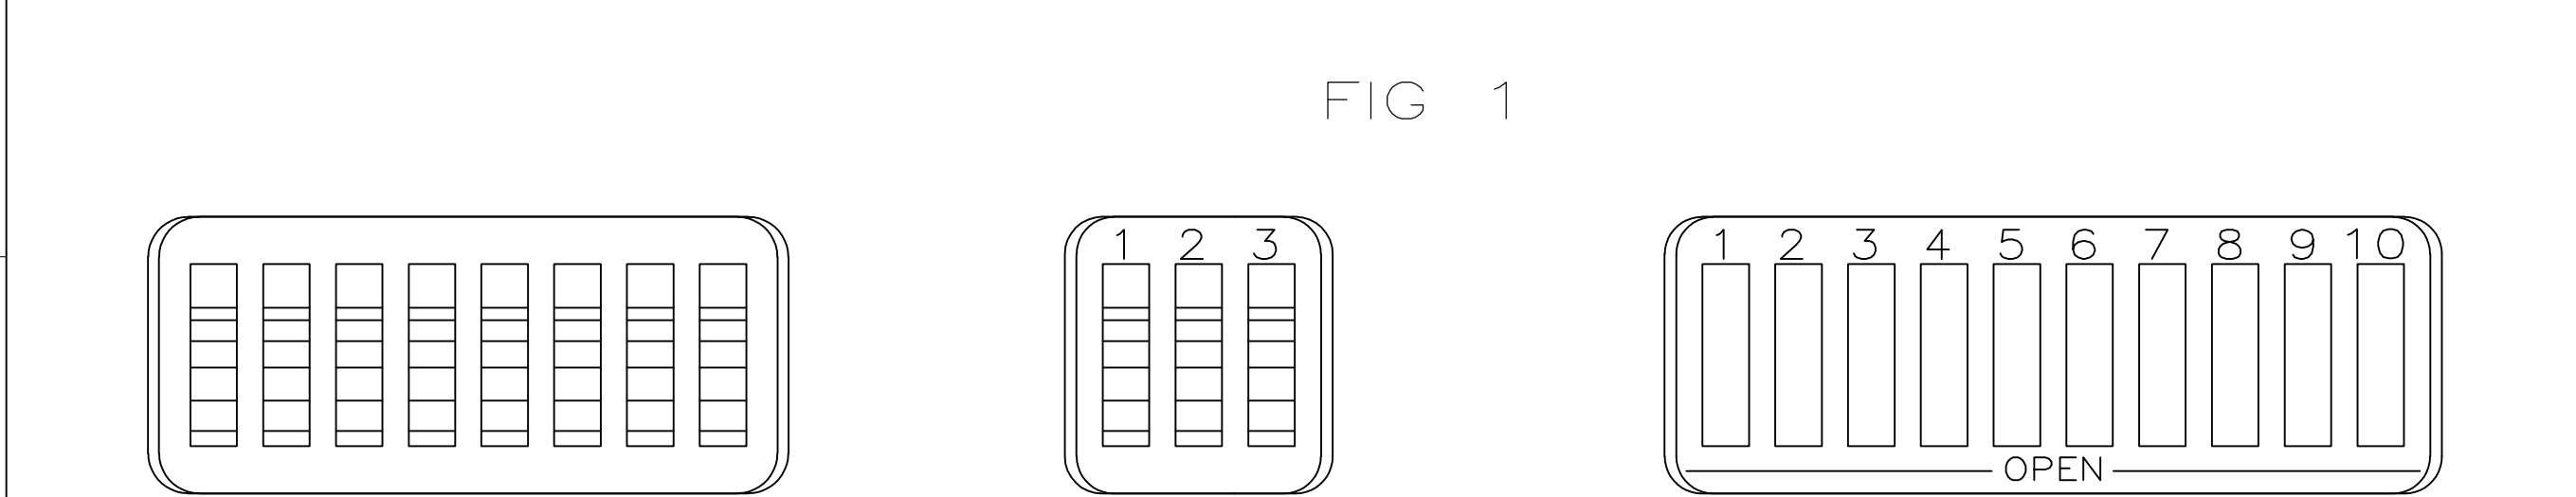

|                                             |             |                         |      |                        |                        |
|---------------------------------------------|-------------|-------------------------|------|------------------------|------------------------|
| <div><div>10</div><div>OBSOLETE</div></div> | FIG 8       | <div><div>6</div></div> | 1.08 | 10                     | <del>7-5435166-4</del> |
| <div><div>10</div><div>OBSOLETE</div></div> | AS SHOWN    | <div><div>6</div></div> | 1.08 | 10                     | <del>5-5435166-5</del> |
|                                             |             |                         | .88  | 8                      | <del>5-5435166-3</del> |
|                                             |             |                         | .78  | 7                      | <del>5-5435166-2</del> |
|                                             |             |                         | .68  | 6                      | <del>5-5435166-1</del> |
|                                             |             |                         | .58  | 5                      | <del>5-5435166-0</del> |
| <div><div>10</div><div>OBSOLETE</div></div> | FIG 7       | ————                    | .48  | 4                      | <del>4-5435166-9</del> |
|                                             | FIG 2       | ————                    | .28  | 2                      | <del>2-5435166-9</del> |
|                                             | AS SHOWN    | ————                    | .88  | 8                      | <del>2-5435166-8</del> |
| 1.08                                        |             |                         | 10   | <del>— 5435166-7</del> |                        |
| .88                                         |             |                         | 8    | <del>5435166-5</del>   |                        |
| .68                                         |             |                         | 6    | <del>5435166-4</del>   |                        |
| .48                                         |             |                         | 4    | <del>5435166-2</del>   |                        |
| <div><div>10</div><div>OBSOLETE</div></div> |             | ————                    | .78  | 7                      | <del>— 5435166-1</del> |
|                                             | TOP MARKING | PROTECTIVE SEAL         | A    | NO OF POSN             | PART NO                |

|                                        |  |                  |     |           |                                                           |           |
|----------------------------------------|--|------------------|-----|-----------|-----------------------------------------------------------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN              | BSV | 10JAN2005 | Tyco Electronics Corporation<br>Harrisburg, PA 17105-3608 |           |
| DIMENSIONS:<br>INCHES                  |  | CHK              | -   | -         |                                                           |           |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | APVD             | -   | -         | SWITCH ASSY, DIP, TYPE C,<br>7000 SERIES, SPST, STANDARD  |           |
| 0 PLC ± -                              |  | PRODUCT SPEC     | -   | -         |                                                           |           |
| 1 PLC ± -                              |  | APPLICATION SPEC | -   | -         | SIZE                                                      | CAGE CODE |
| 2 PLC ± -                              |  | WEIGHT           | -   | -         | A2                                                        | 00779     |
| 3 PLC ± .005                           |  | CUSTOMER DRAWING |     | SCALE     | 4:1                                                       | SHEET     |
| 4 PLC ± -                              |  |                  |     | 1 of 1    |                                                           | REV       |
| ANGLES ± -                             |  |                  |     | A1        |                                                           |           |
| FINISH                                 |  |                  |     |           |                                                           |           |