

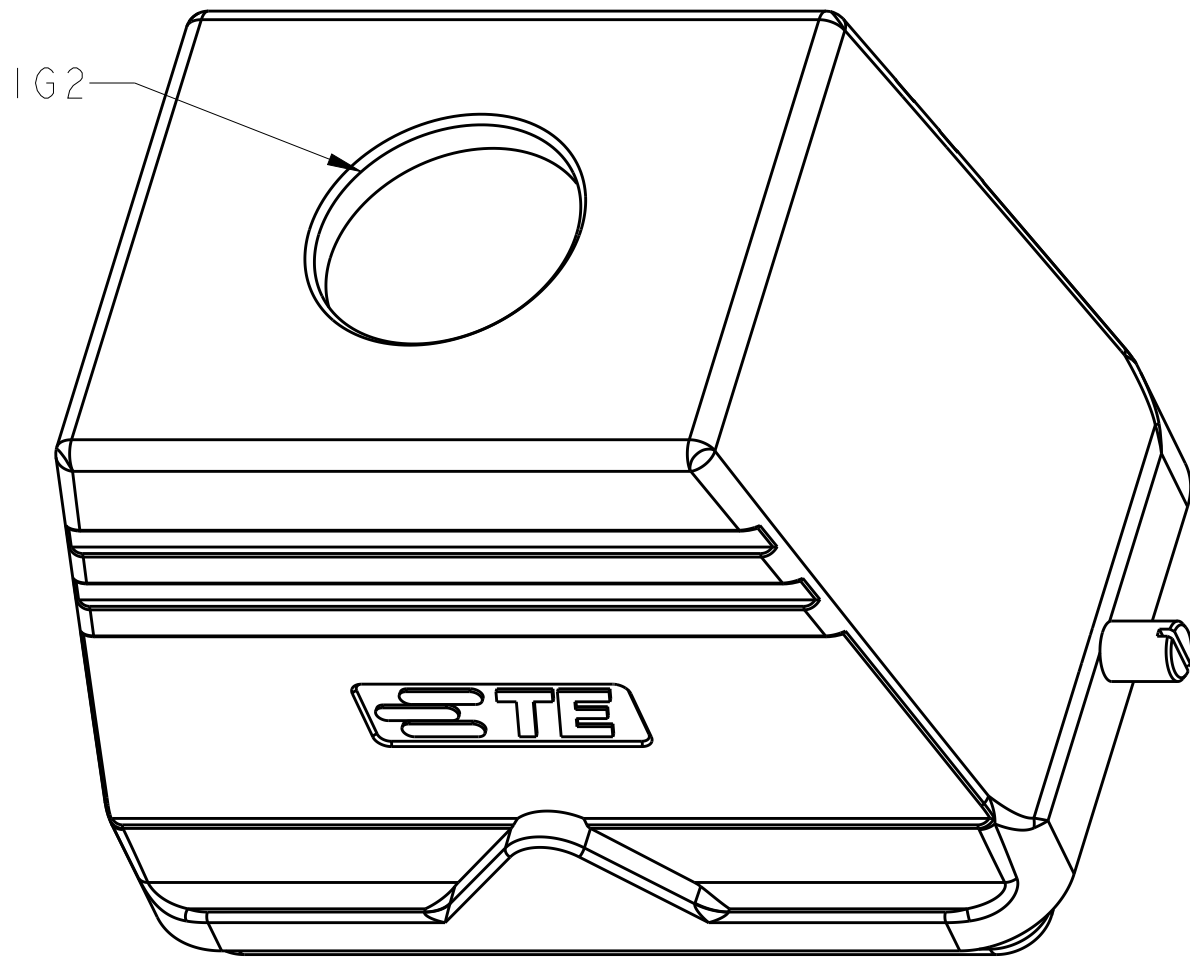
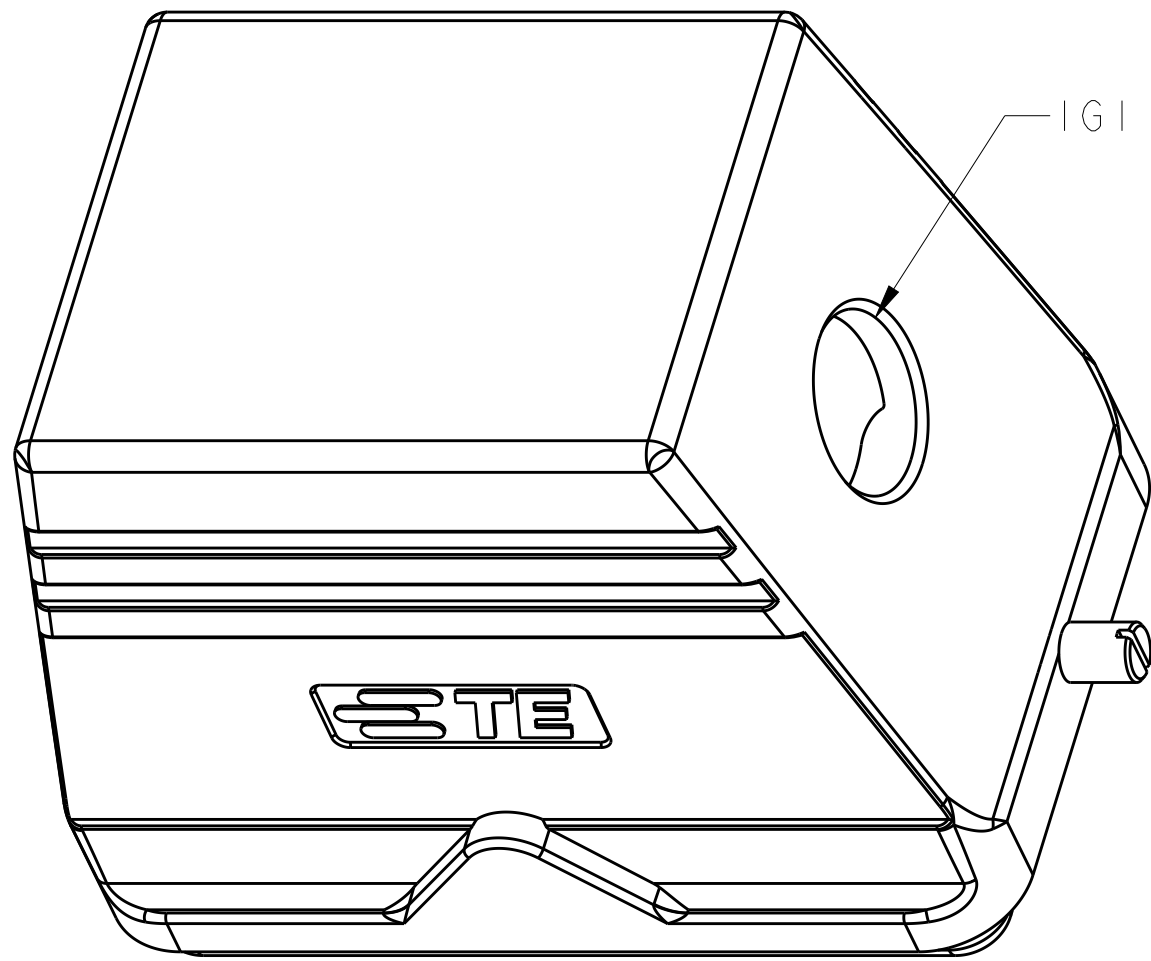
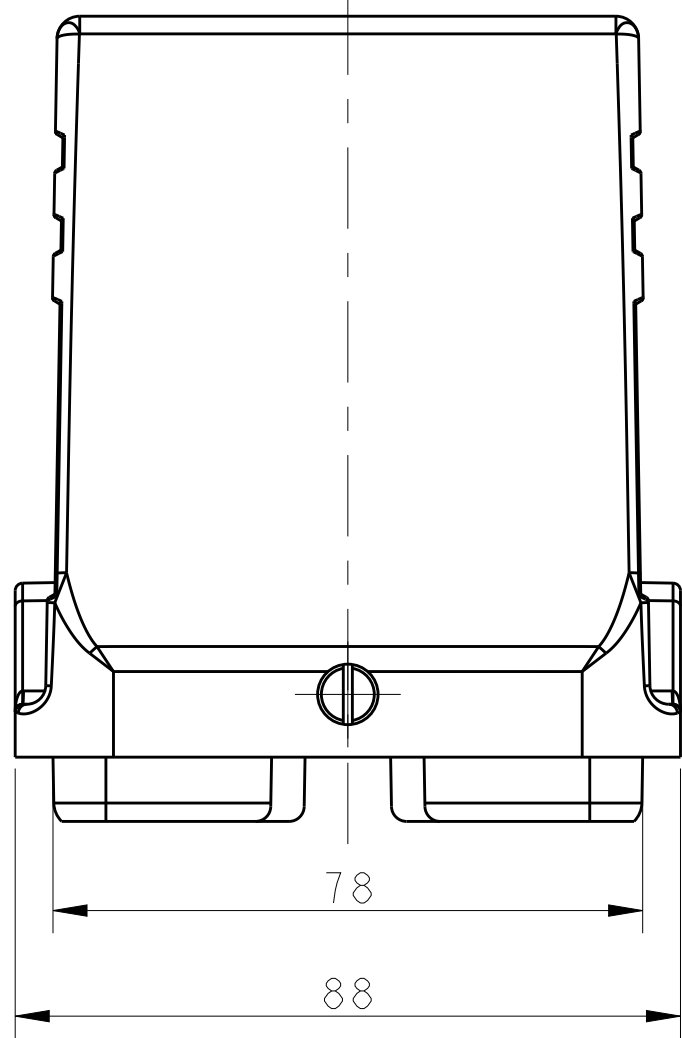
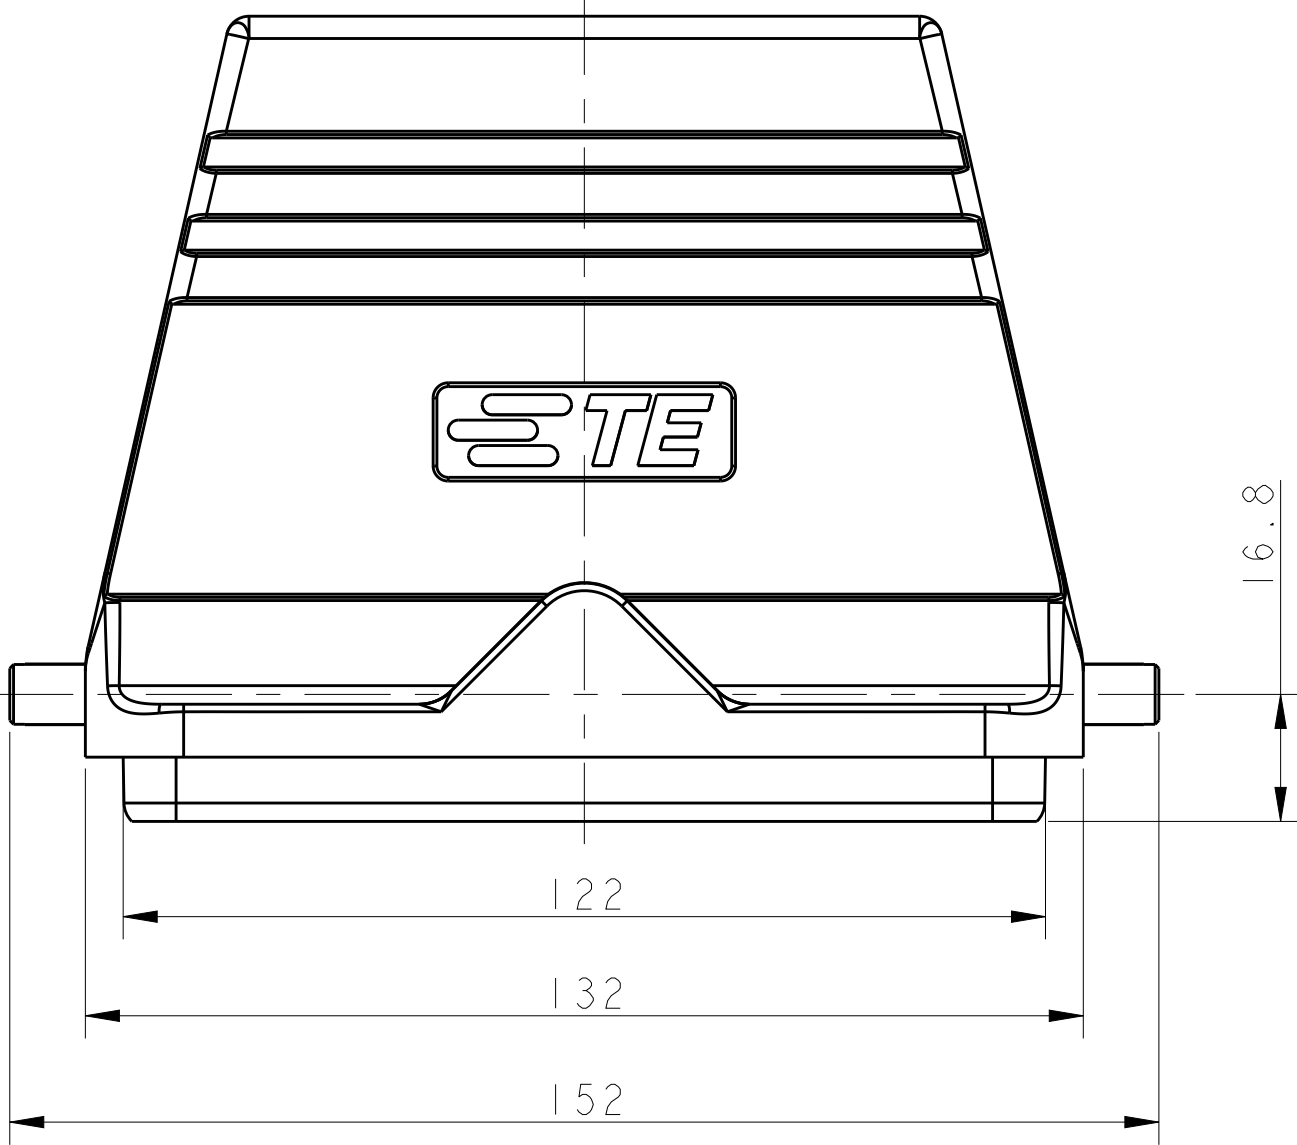


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2015	DL	CW


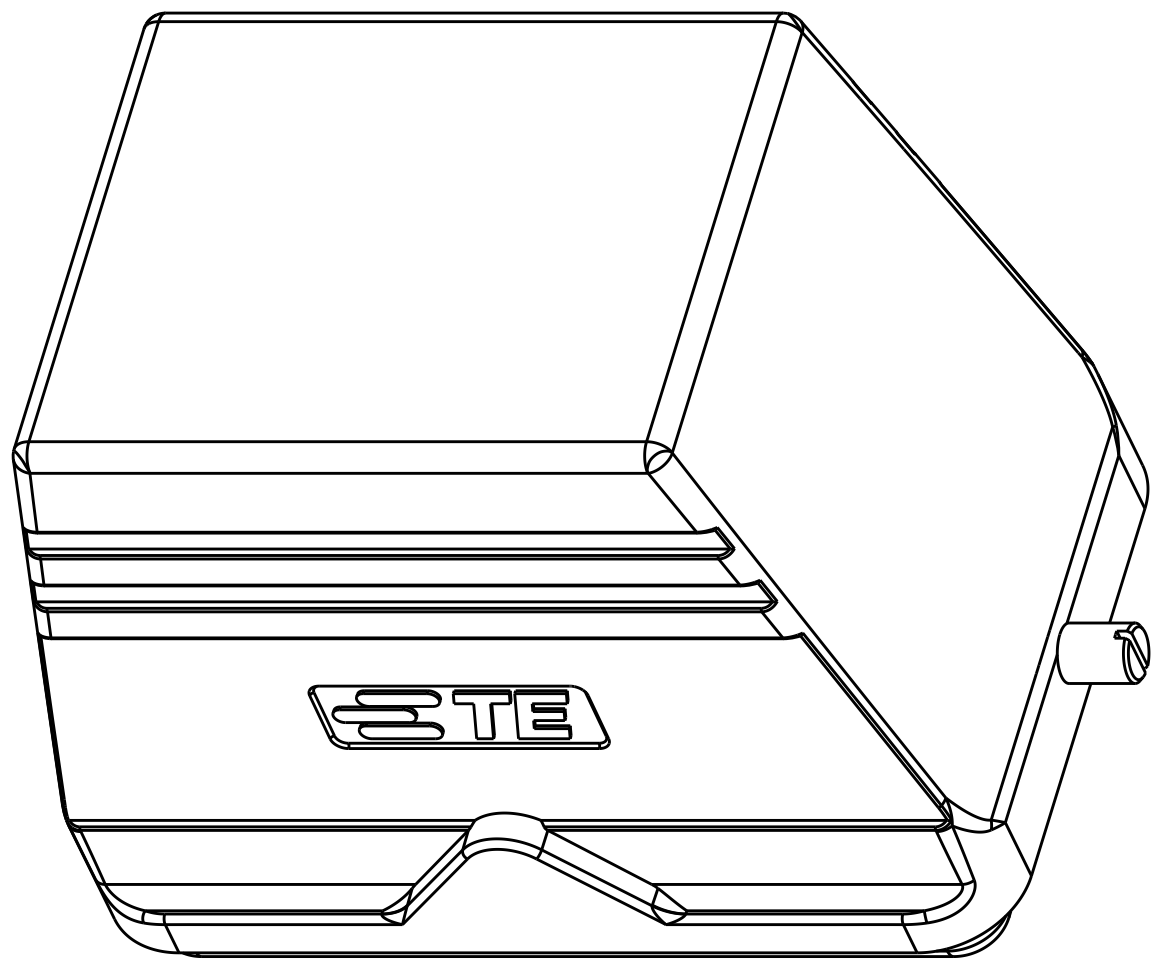


TYPE 2: SIDE ENTRY
OTHER SPEC REFER TO TYPE 1

TYPE 3: TOP ENTRY
OTHER SPEC REFER TO TYPE 1

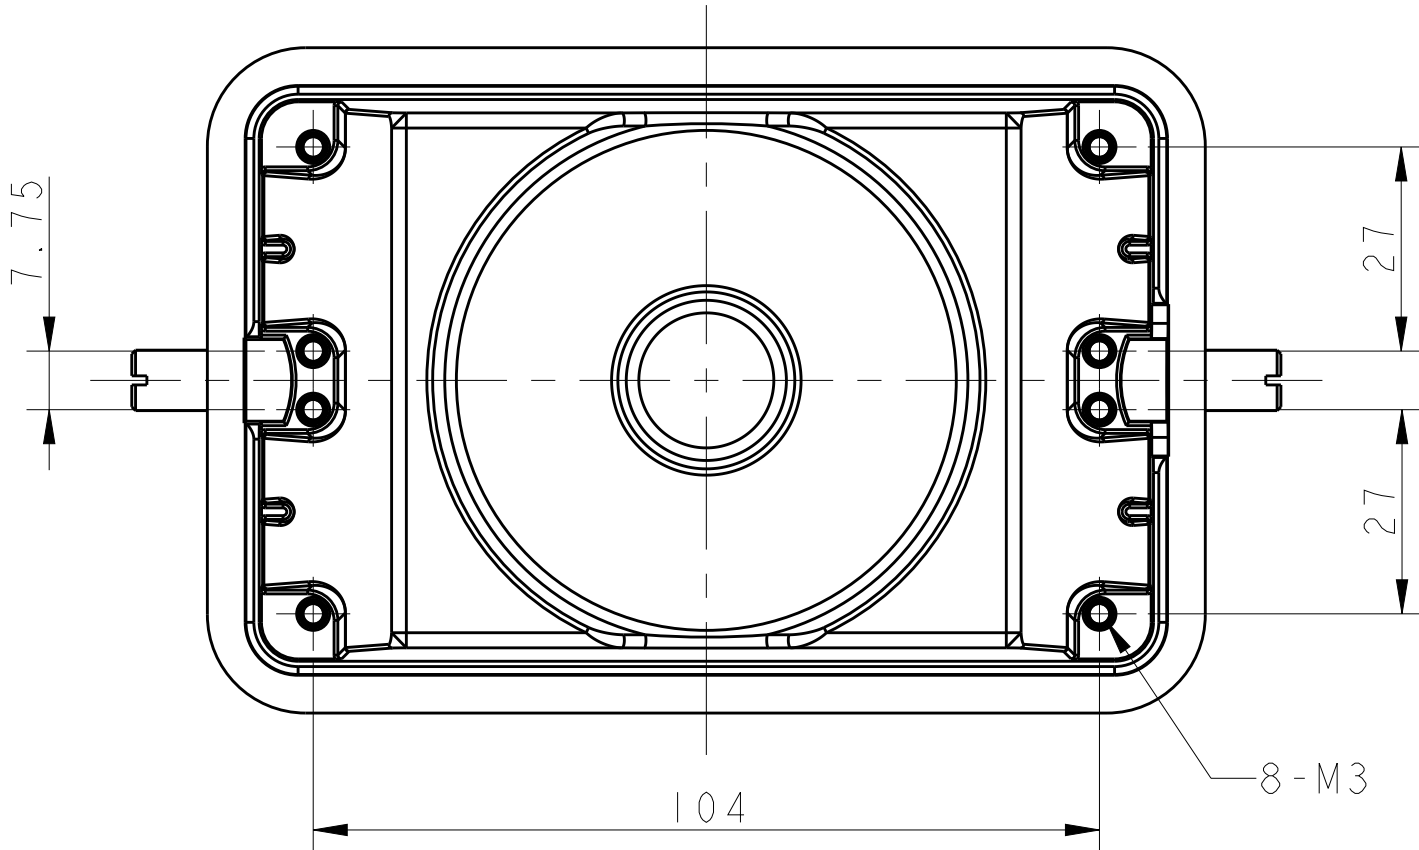


TYPE 1: NO ENTRY

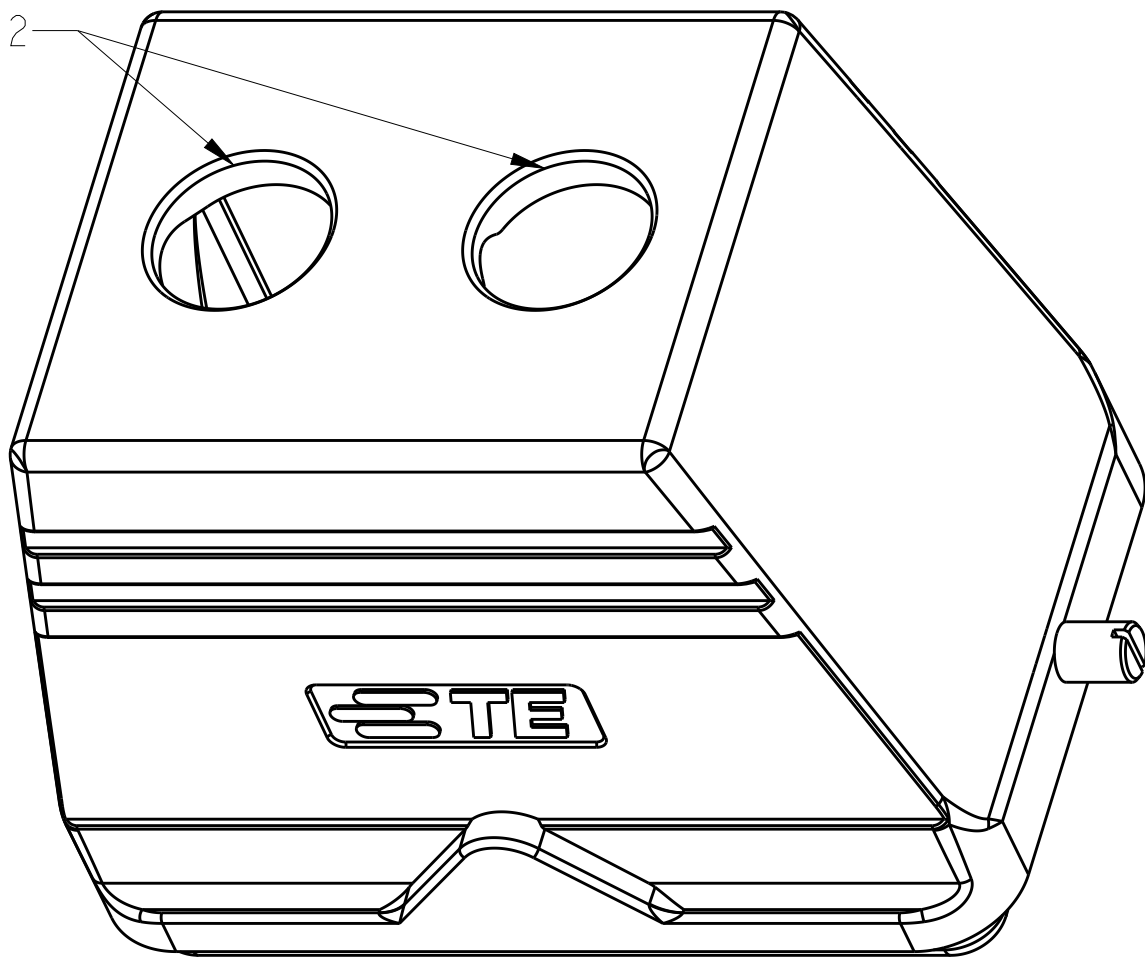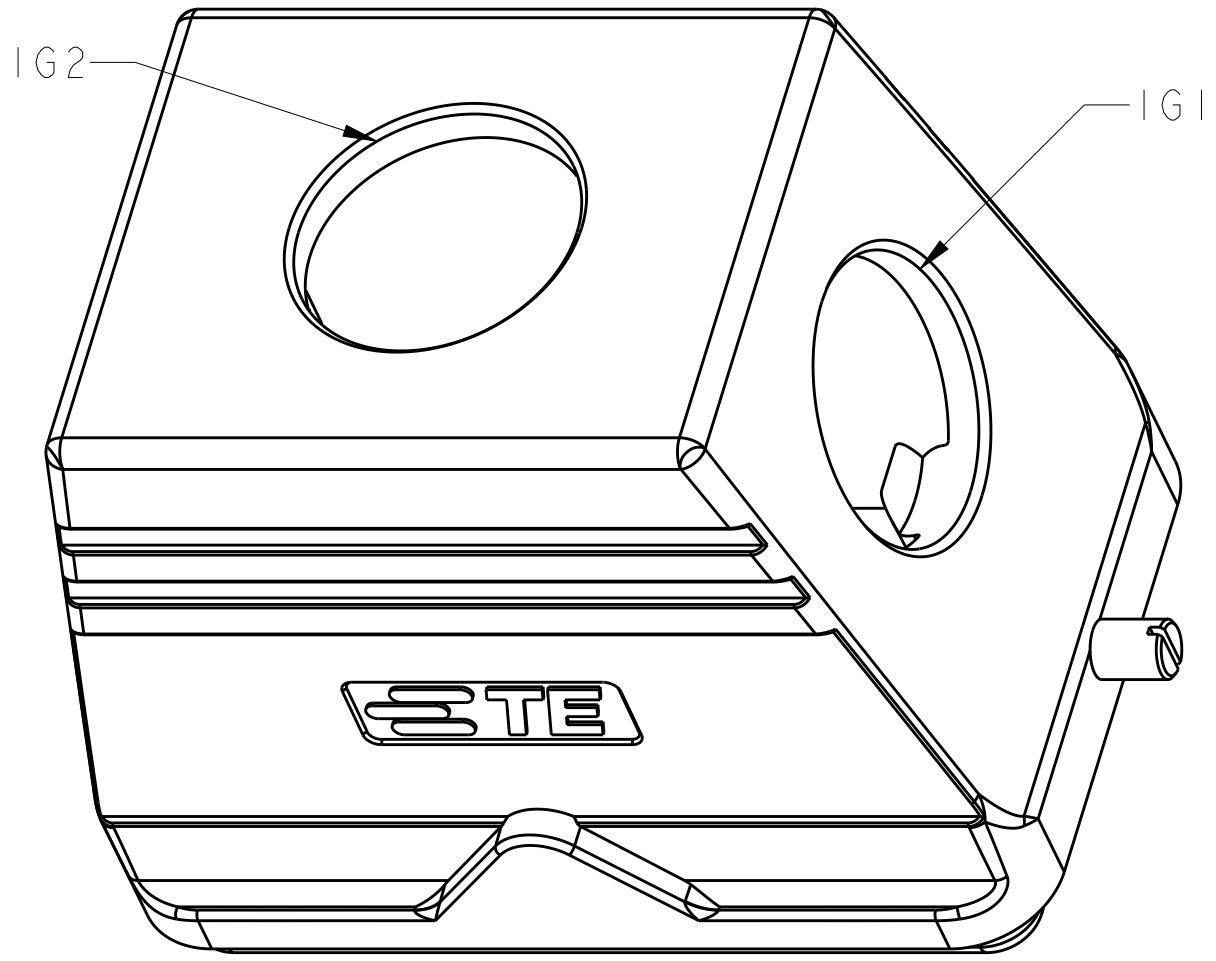

TYPE 4: SIDE / TOP ENTRY
OTHER SPEC REFER TO TYPE 1

TYPE 5: TOP ENTRY(2 HOLE)
OTHER SPEC REFER TO TYPE 1

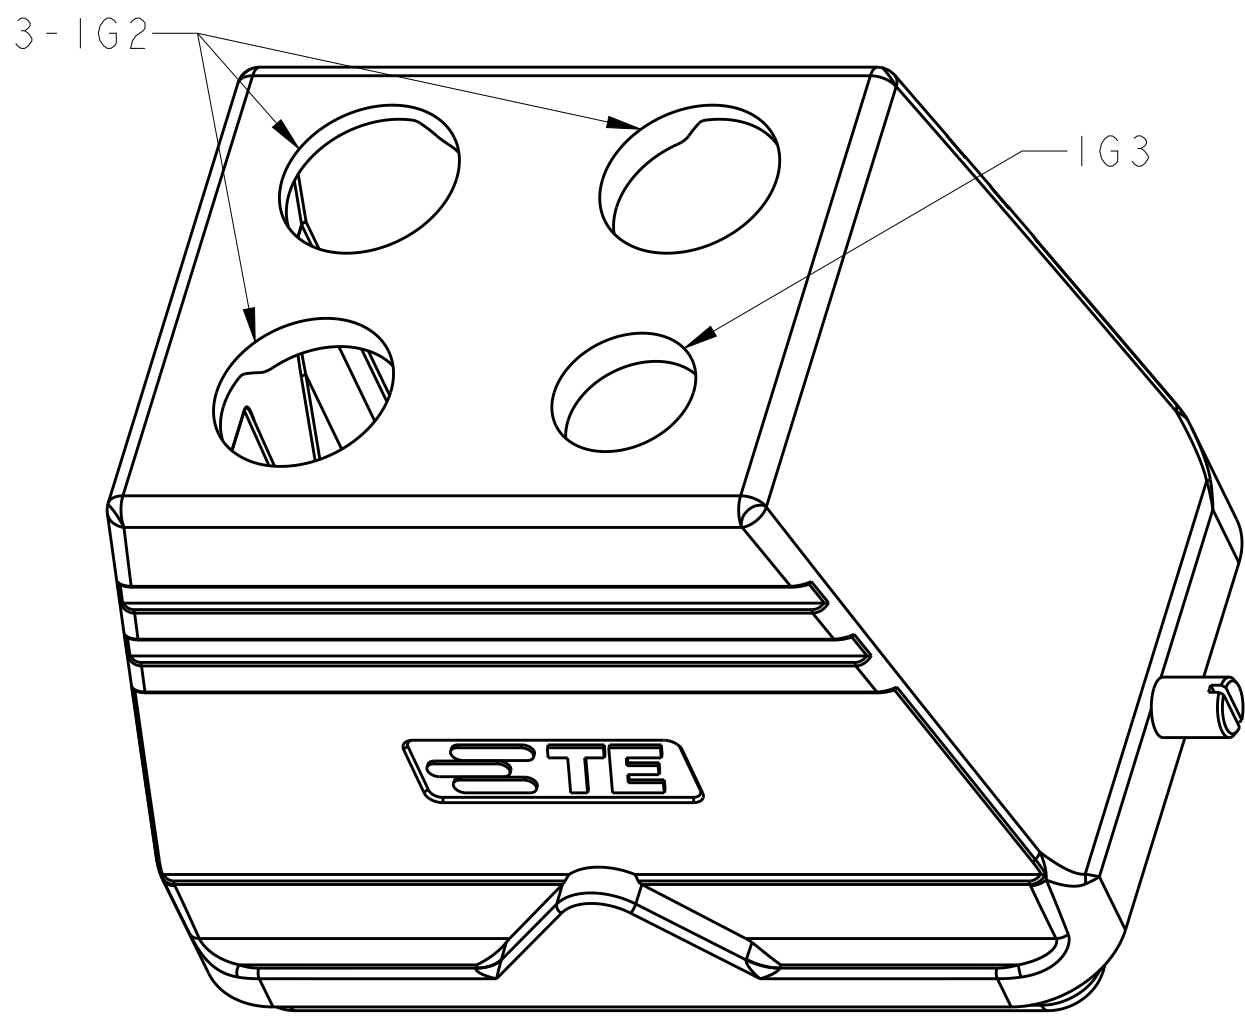

TYPE 6: TOP ENTRY(4 HOLE)
OTHER SPEC REFER TO TYPE 1

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

T10X0480000-000	TYPE 1	H48B-TG/S-RO-XX	-	-	-
T1310480125-000	TYPE 2	H48B-TS-RO-M25	M25	-	-
T1310480129-000		H48B-TS-RO-PG29	PG29	-	-
T1310480132-000		H48B-TS-RO-M32	M32	-	-
T1310480136-000		H48B-TS-RO-PG36	PG36	-	-
T1310480140-000		H48B-TS-RO-M40	M40	-	-
T1310480142-000		H48B-TS-RO-PG42	PG42	-	-
T1310480150-000		H48B-TS-RO-M50	M50	-	-
T1320480129-000	TYPE 3	H48B-TG-RO-PG29	-	PG29	-
T1320480132-000		H48B-TG-RO-M32	-	M32	-
T1320480136-000		H48B-TG-RO-PG36	-	PG36	-
T1320480140-000		H48B-TG-RO-M40	-	M40	-
T1320480142-000		H48B-TG-RO-PG42	-	PG42	-
T1320480150-000		H48B-TG-RO-M50	-	M50	-
T1320480163-000		H48B-TG-RO-M63	-	M63	-
T1320484040-000	TYPE 4	H48B-TG/TS-RO-M40/M40	M40	M40	-
T1320480225-000	TYPE 5	H48B-TG-RO-2M25	-	2-M25	-
T1320482520-000	TYPE 6	H48B-TG-3M25M20	-	3-M25	M20
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2	IG3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUN2015	STE TE Connectivity		
DIMENSIONS:	mm	CHK CHRIS WANG 08JUN2015			
		APVD XU XIANG 08JUN2015			
		PRODUCT SPEC 108-137013			
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPLICATION SPEC 114-137013	NAME H48B-TG/TS-RO-PG/M		
		ANGLES FINISH			
MATERIAL	-	WEIGHT	A1	SIZE CAGE CODE DRAWING NO	RESTRICTED TO
	-	CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 1	REV A