


REV. 0
DCO 16056

COIL: @ 25°C	
RESISTANCE	160 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.4 VDC
MUST RELEASE	0.7 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE AND RELEASE TIMING 4.0 MS MAX.
CONTACT BOUNCE 2.0 MS MAX.

CUSTOMER DATA SHEET

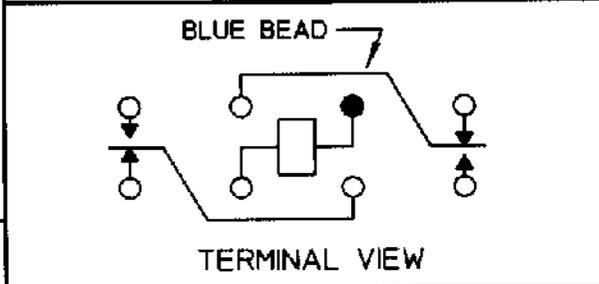

CONTACT RATING: LOW LEVEL TO	
5 AMPS 28 VDC RESISTIVE	
100,000 OPERATIONS MIN.	

DR. B.D. 1/27/00 CK. GAN 1/27/00



CUST. C. I. I. STD.
CUST. NO. REV.

HFW5A RELAY

HFW5A11B0G00