


LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			DI	REVISED PER ECO-11-005027	18MAR2011	RK	HMR

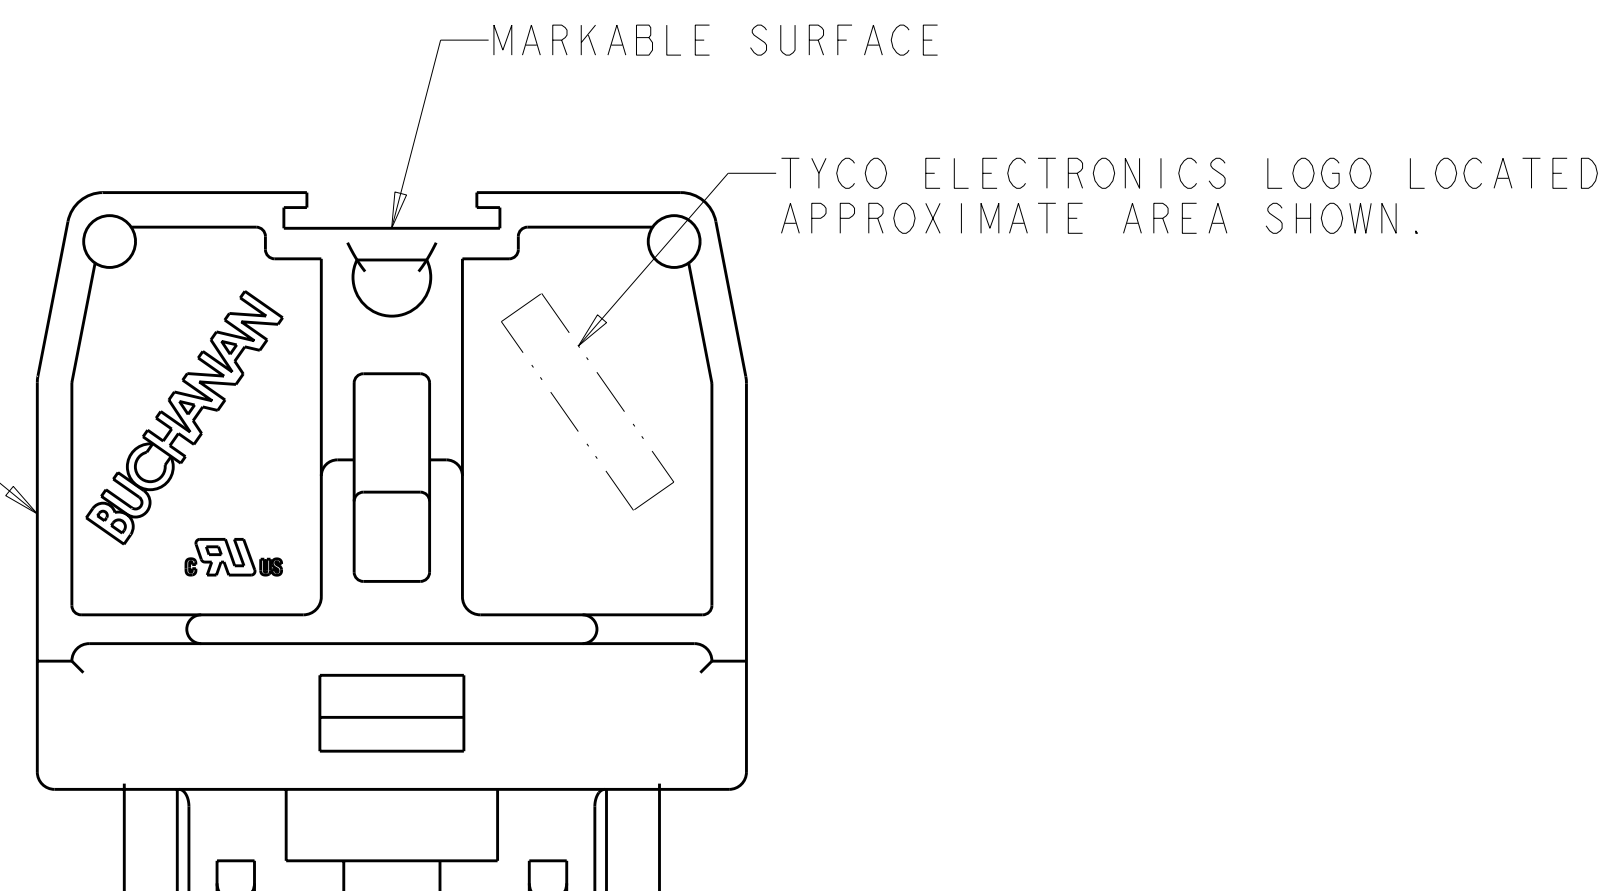

4. ELECTRICAL
MAXIMUM CURRENT: 30A
OPERATING VOLTAGE: 600 V
WIRE RANGE: 10-22 AWG.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON	15 JAN 2002		 TE Connectivity						
		CHK S. YODER	15 JAN 2002								
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	ASSEMBLY, TERMINAL BLOCK, NEMA, FLAT BASE, MEDIUM DUTY, TUBULAR CLAMP						
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± .010 4 PLC ± ANGLES ± ±									
MATERIAL	FINISH	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
		APPLICATION SPEC		A200779		C-1546234	-				
SEE TABLE	SEE TABLE	WEIGHT				SCALE	3.1	SHEET	OF	REV	D
		CUSTOMER DRAWING									