
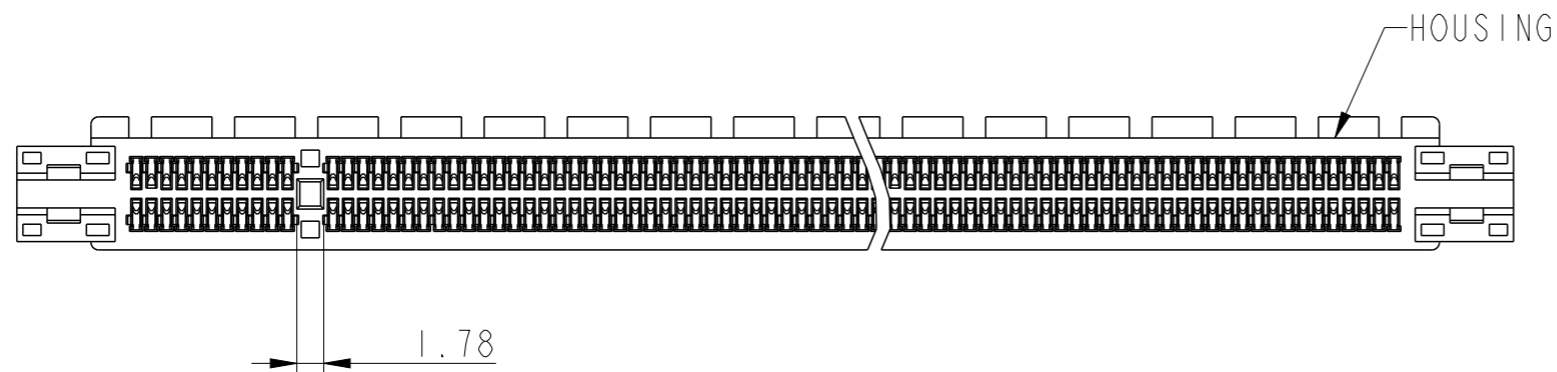
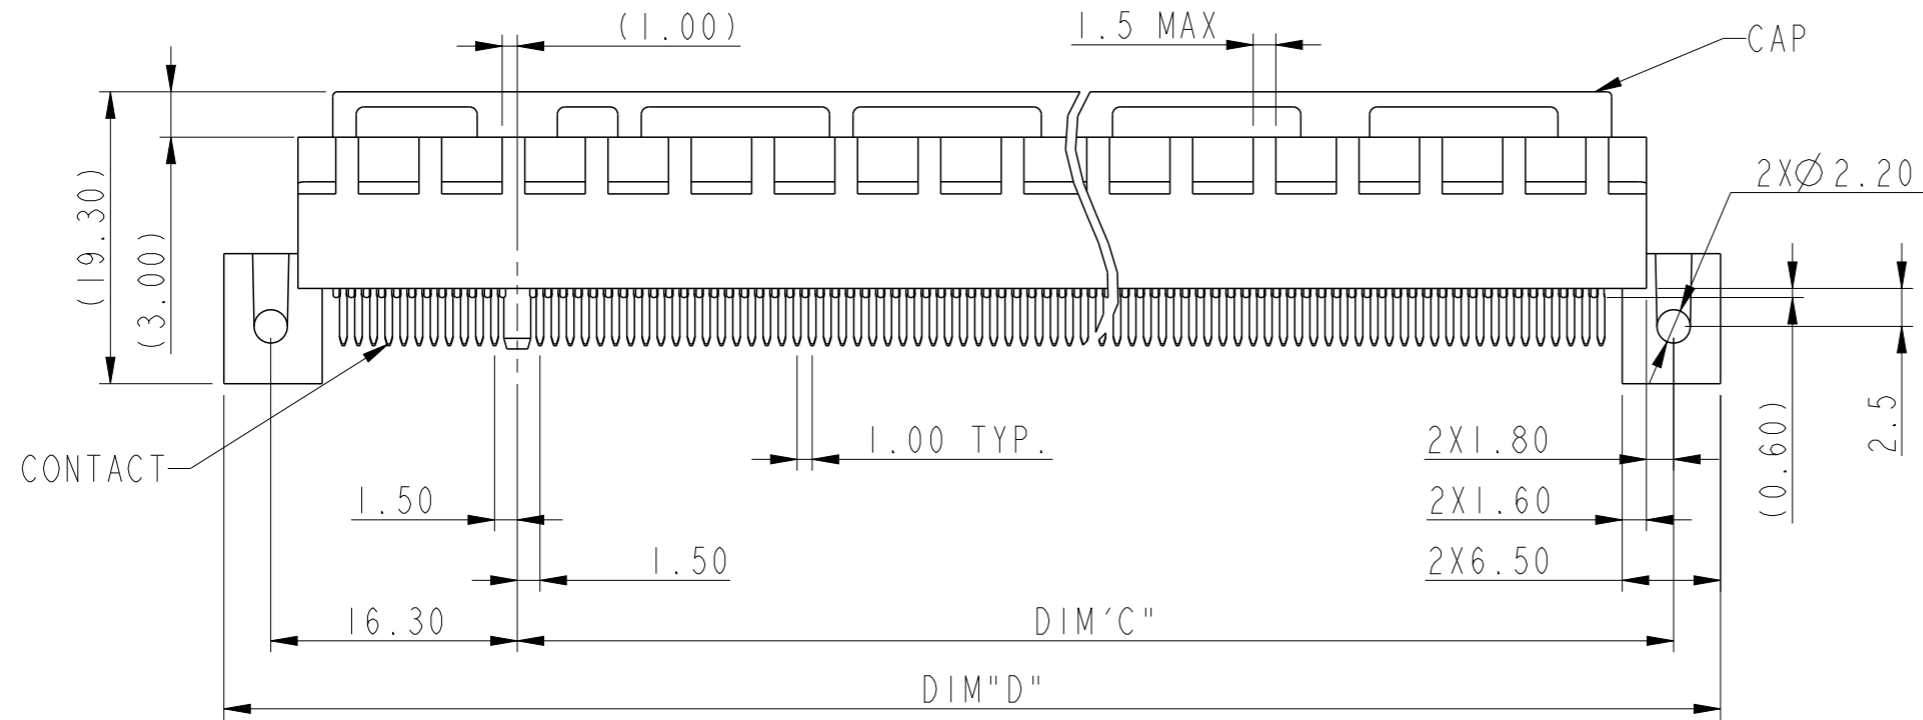
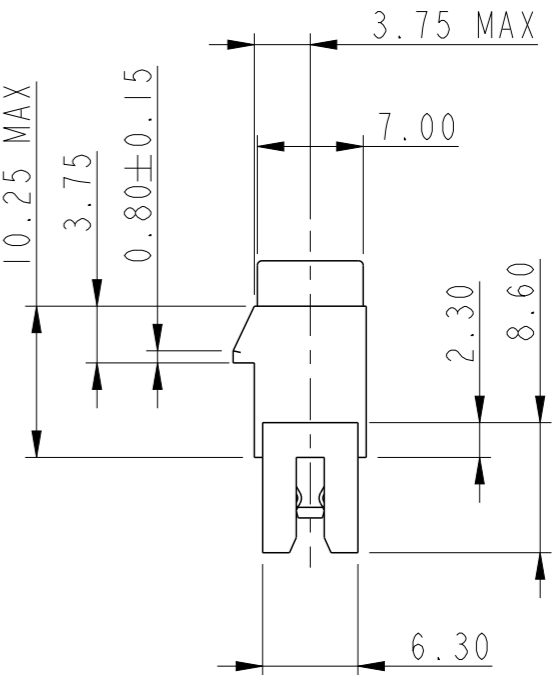


Amphenol
FCi



© 2016 AFCI

D

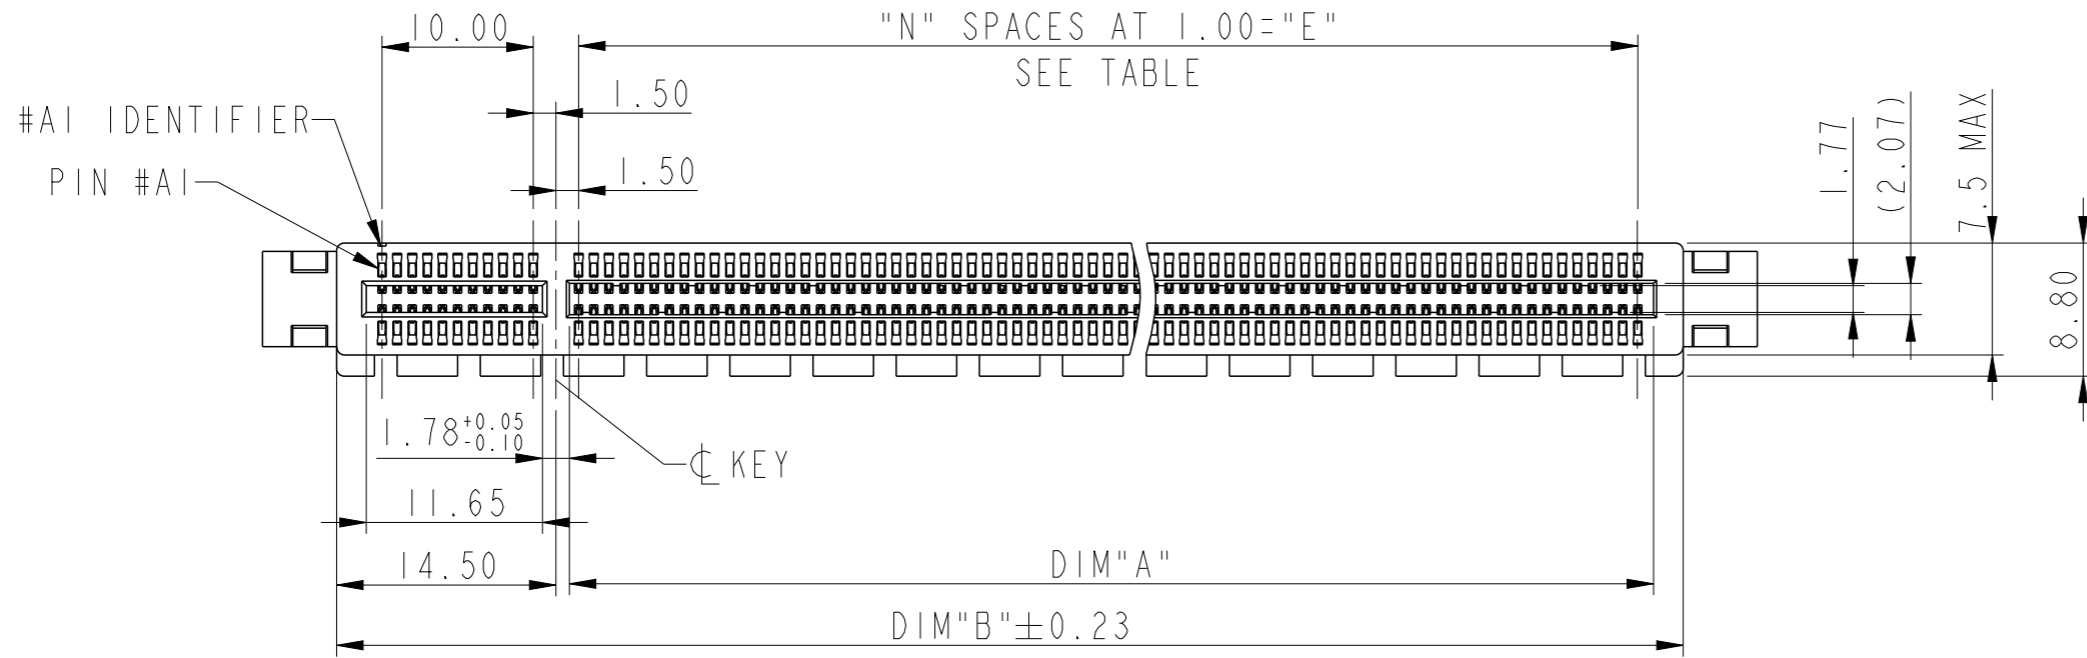

CONNECTOR LINK WIDTH	#POS REF	N	DIM "A"	DIM "B"	DIM "C"	DIM "D"	DIM "E"
X1	36	6	7.65	25.00	12.30	34.8	6.00
X4	64	20	21.65	39.00	26.30	48.8	20.00
X8	98	37	38.65	56.00	43.30	65.8	37.00
X16	164	70	71.65	89.00	76.30	98.8	70.00


spec ref	dr	Jeny Ren	2016/06/20	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2016/12/09			ecn no		rel level	
ASME Y14.5	chr	-	-			Released			
surface	linear	0.X	±0.30	Amphenol FCI		PCI EXPRESS 3.0 STRADDLE MOUNT		dwg no 10140125	rev A
		0.XX	±0.20						
		0.XXX	±0.1	www.fci.com		Product-Customer Drw		sheet 1 of 4	
ASME Y14.5	angular	0°	±2°	cat. no.		Product-Customer Drw		sheet 1 of 4	

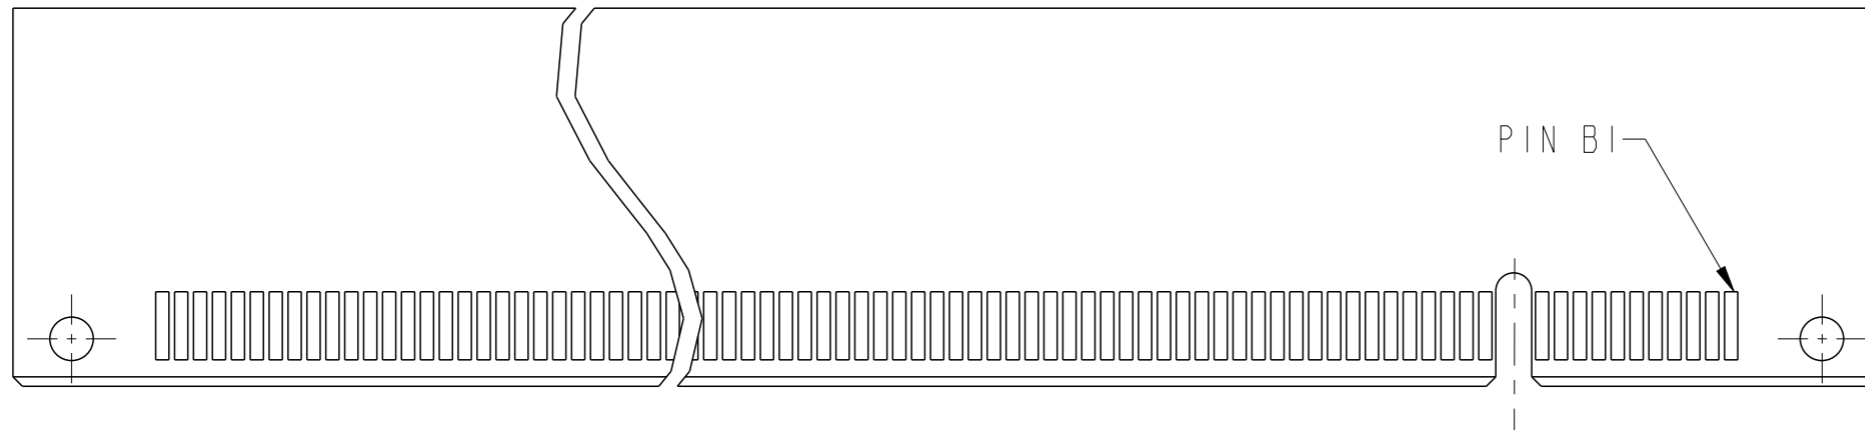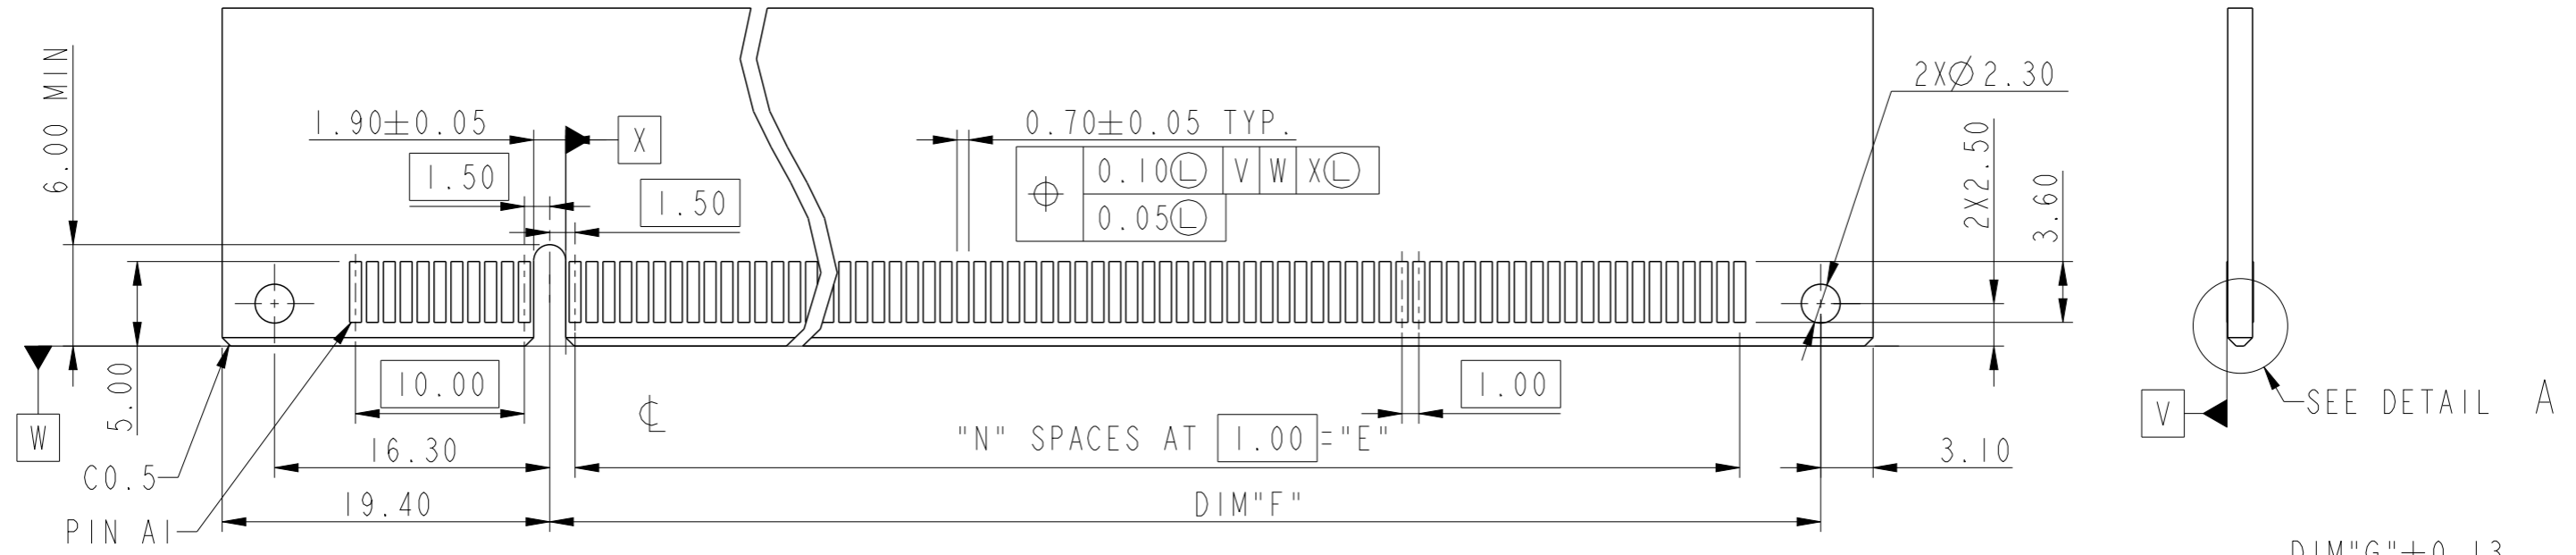


RECOMMENDED PCB LAYOUT

POSITION	N	DIM "F"
36	6	12.30
64	20	26.30
98	37	43.30
164	70	76.30

spec ref	dr	Jeny Ren	2016/06/20	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2016/12/09			ecn no	-	rel level	Released
ASME Y14.5	chr	-	-						
surface 	linear 	0.X	±0.30	Amphenol FCi	PCI EXPRESS 3.0 STRADDLE MOUNT	dwg no 10140125	rev A		
		0.XX	±0.20						
		0.XXX	±0.1						
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product-Customer Drw	sheet 2 of 4		

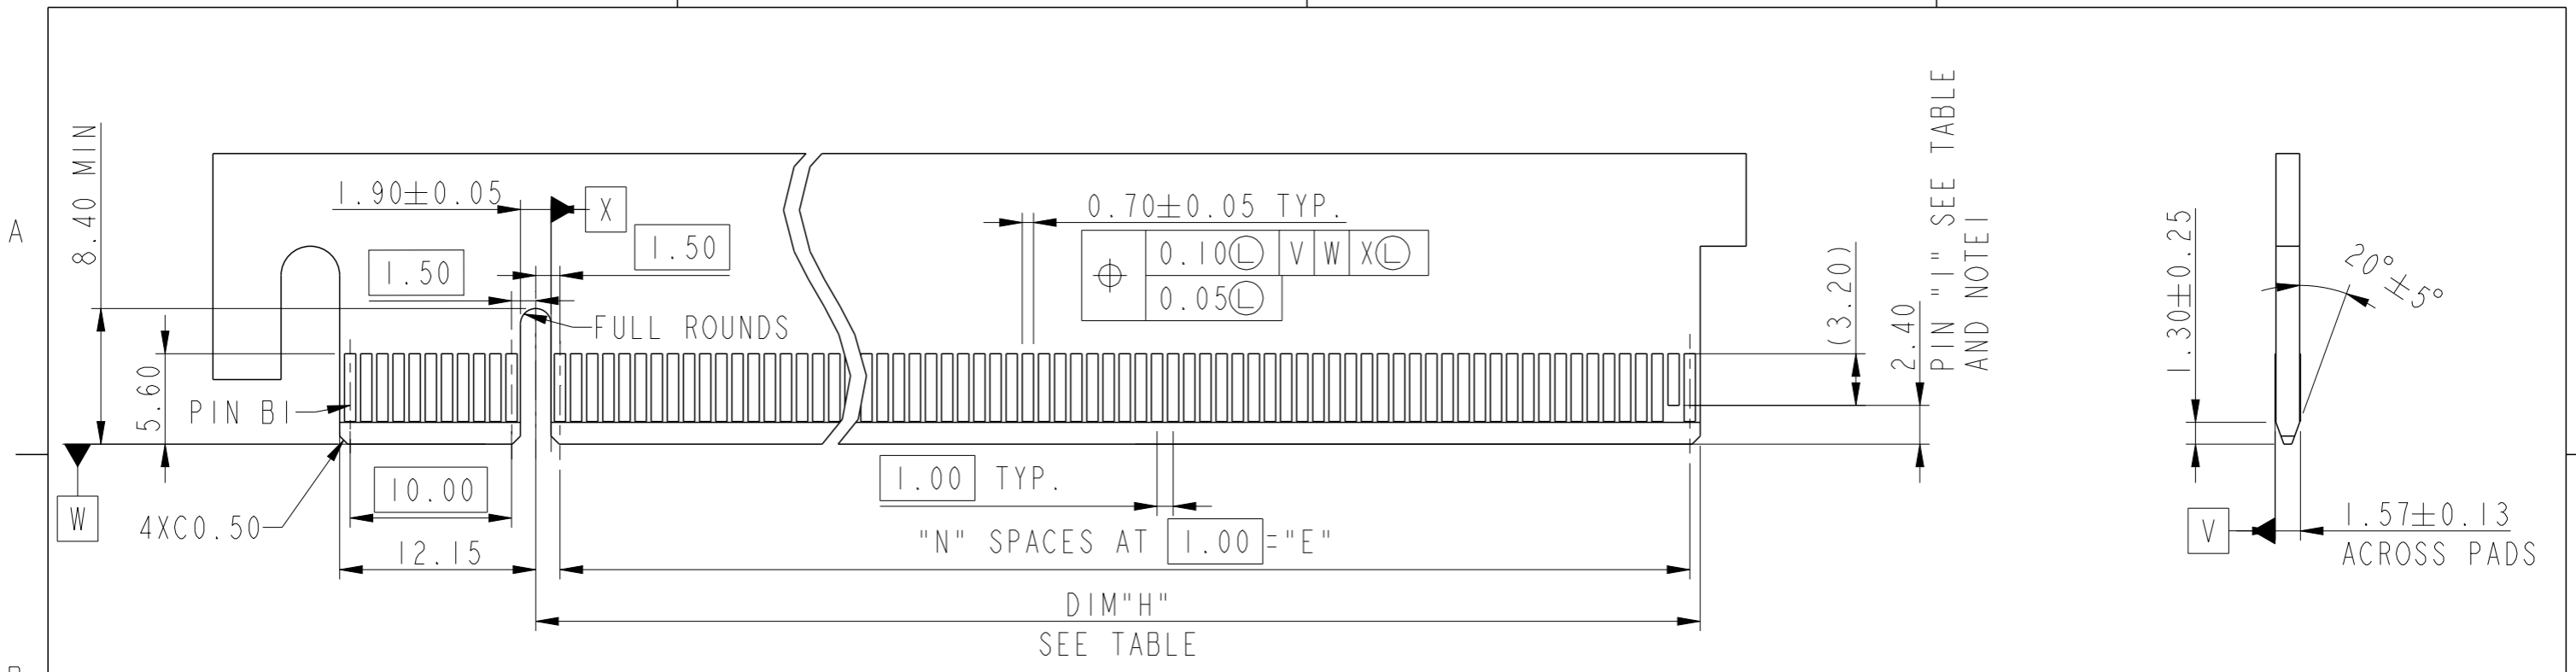


1. NO TIE BAR PERMITTED FROM CARD EDGE TO LEADING EDGE OF PAD FOR PINS A1 AND PIN "1".
2. CHAMFER EDGES MUST BE FREE OF CUTTING BURRS.
3. TOLERANCE : ± 0.13

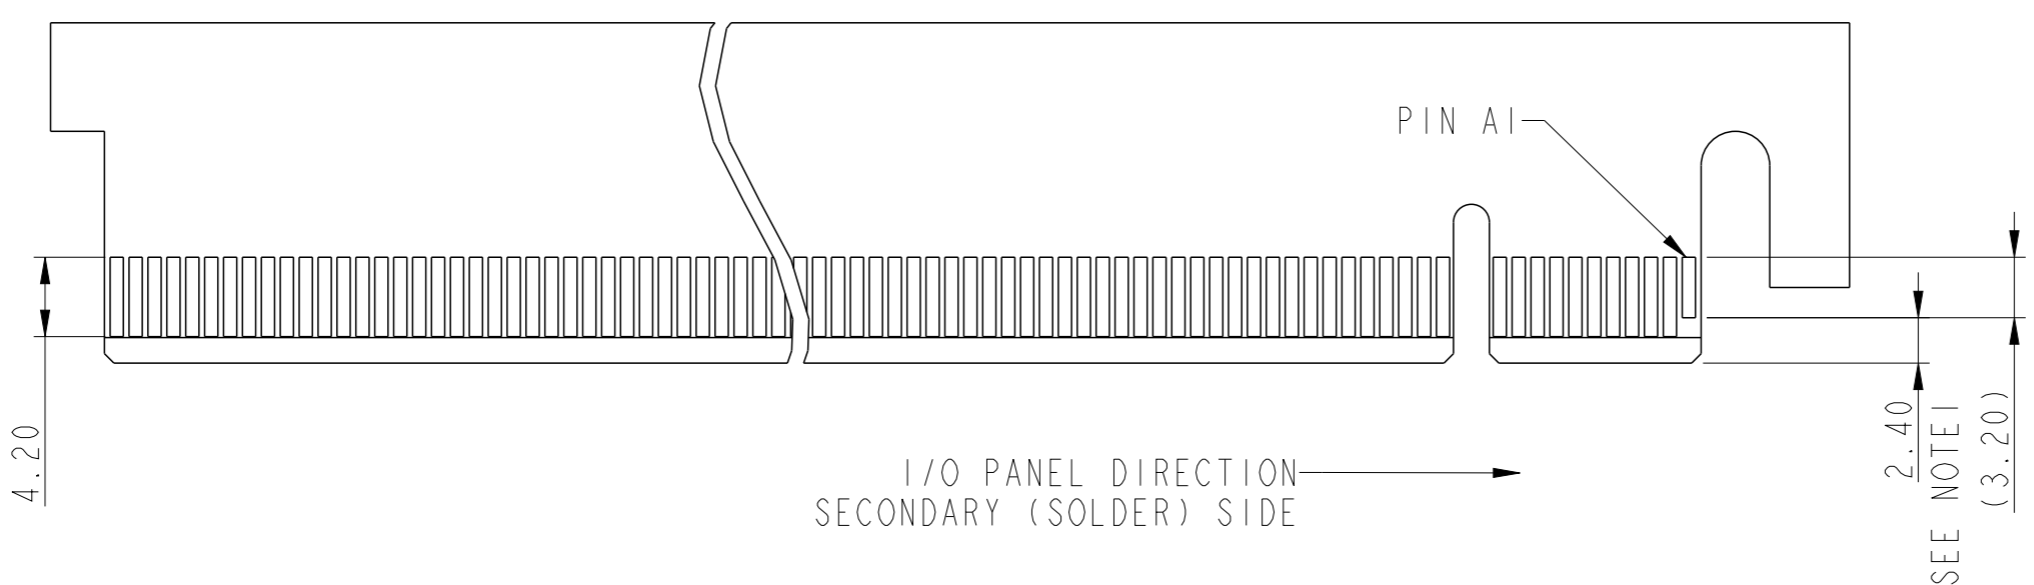

spec ref	dr	Jeny Ren	2016/06/20	projection	MM	size	A3	scale	2:1
tolerance std	eng	Jeny Ren	2016/12/09			ecn no	-	rel level	Released
ASME Y14.5	chr	-	-						
TOLERANCES UNLESS OTHERWISE SPECIFIED				product family					
surface	linear	0.X	±	Amphenol FCI PCI EXPRESS 3.0 STRADDLE MOUNT www.fci.com	cat. no.	title PCI EXPRESS 3.0 STRADDLE MOUNT	dwg no 10140125	rev A	Product-Customer Drw sheet 3 of 4
		0.XX	±						
		0.XXX	±						
ASME Y14.5	angular	0°	±						


NOTES:

- MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, BLACK.
CAP: HIGH PERFORMANCE RESINS, BLACK.
CONTACT: COPPER ALLOY.
- PLATING:
UNDERPLATE: 50 u" MIN NICKEL OVER ALL
SOLDER AREA: 100 u" MIN TIN (LEAD FREE)
MATING AREA: SEE PRODUCT PART NUMBER.
- PRODUCT SPECIFICATION: GS-12-1193
- PACKAGE SPECIFICATION: GS-14-2401.
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- ONLY P/N 10140125-XXXX10XX CAN GO IR REFLOW PROCESS.
- DATE CODE BE PRINTED ON PROPER SURFACE.

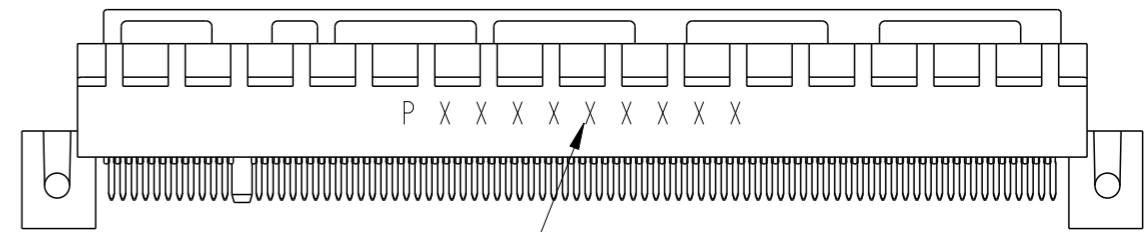

DATA CODE INFORMATION

P X X X X X X X X X

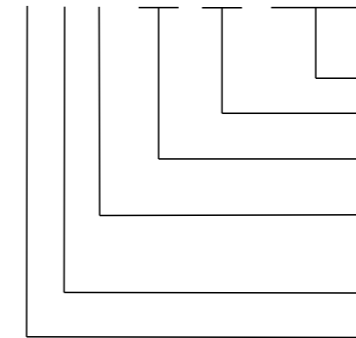

PRODUCTION LINE CODE
DATE CODE THROUGH 01 TO 31
WEEK NUMBER 01 THROUGH 53
YEAR CODE; MOST RIGHT OF DIGIT OF PRODUCTION. (e.g 2007=7)
MANUFACTURE SITE; 2 FOR DONGGUAN SOURCE, P FOR CHINA

PRODUCT PART NUMBER:

10140125- X X X X X X X X

NO. OF POSITION
36:36 POSITIONS
64:64 POSITIONS
98:98 POSITIONS
A4:164 POSITIONS

PCB THICKNESS OPTION
0:1.57 MM
1:2.0/2.08 MM
2:2.31/2.36/2.4 MM

LEAD FREE OPTION
LF:LEAD FREE

RESERVE
0

CAP OPTION (SEE NOTE 6)
0:WITHOUT CAP
1:CAP

CONTACT PLATING
0:15 u" Au
1:30 u" Au
2:15 u" GXT

Amphenol
FCi

© 2016 AFCI

spec ref		dr	Jeny Ren	2016/06/20	projection	MM	size	A3	scale	2:1
tolerance std		eng	Jeny Ren	2016/12/09			ecn no		-	
ASME Y14.5		chr	-	-			rel level		Released	
surface	linear	0.X	±0.30	Amphenol FCi www.fci.com	PCI EXPRESS 3.0 STRADDLE MOUNT		dwg no 10140125	rev A		
		0.XX	±0.20							
0.XXX	±0.1									
ASME Y14.5		angular	0°	±2°	cat. no.	Product-Customer Drw		sheet 4 of 4		