

SPECIFICATIONS:

ELECTRICAL:



CURRENT RATING: 3 AMPS
 INSULATOR RESISTANCE: 5,000 MegOHMS Min.
 DIELECTRIC WITHSTANDING: 1,00VAC FOR 60SEC.
 CONTACT RESISTANCE: 25MilliOHMS Max.
 OPERATING TEMPERATURE: -55° ~ +105° C

MATERIAL:

CONTACTS: BRASS
 INSULATOR: NYLON 9T, UL94V-0
 PROCESS TEMPERATURE: 230°C
 HIGH DENSITY D-SUB: BLUE
 MINI-DIN = LEFT PORT: PURPLE
 RIGHT PORT: GREEN
 SHELL: COLD ROLL STEEL

PLATING:

CONTACTS: GOLD FLASH
 SHELL: NICKEL

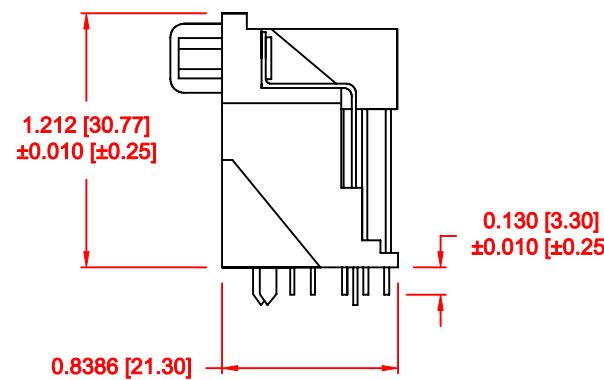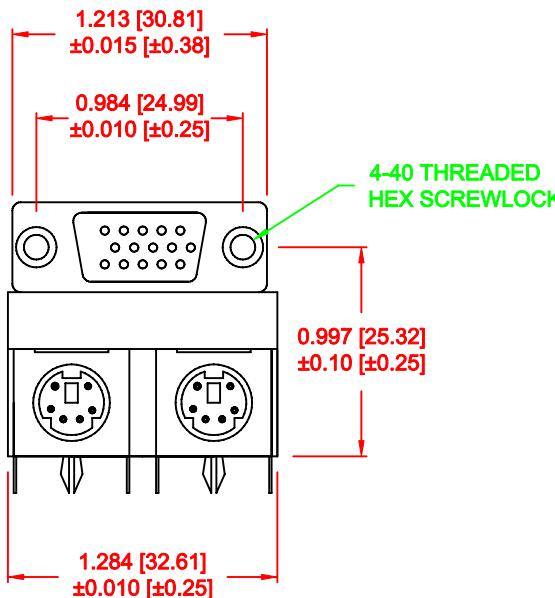

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
 THE PROPERTY OF NorComp AND SHALL NOT
 BE REPRODUCED, COPIED OR USED AS THE
 BASIS FOR THE MANUFACTURE OF SALE OF
 APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS DATE: 11-15-05


CHECKED: DATE:

SCALE: 1 : 1 SHEET OF 1 3 REV 6

DWG NO. 999-H15-PS2L571

NorComp

RoHS COMPLIANT

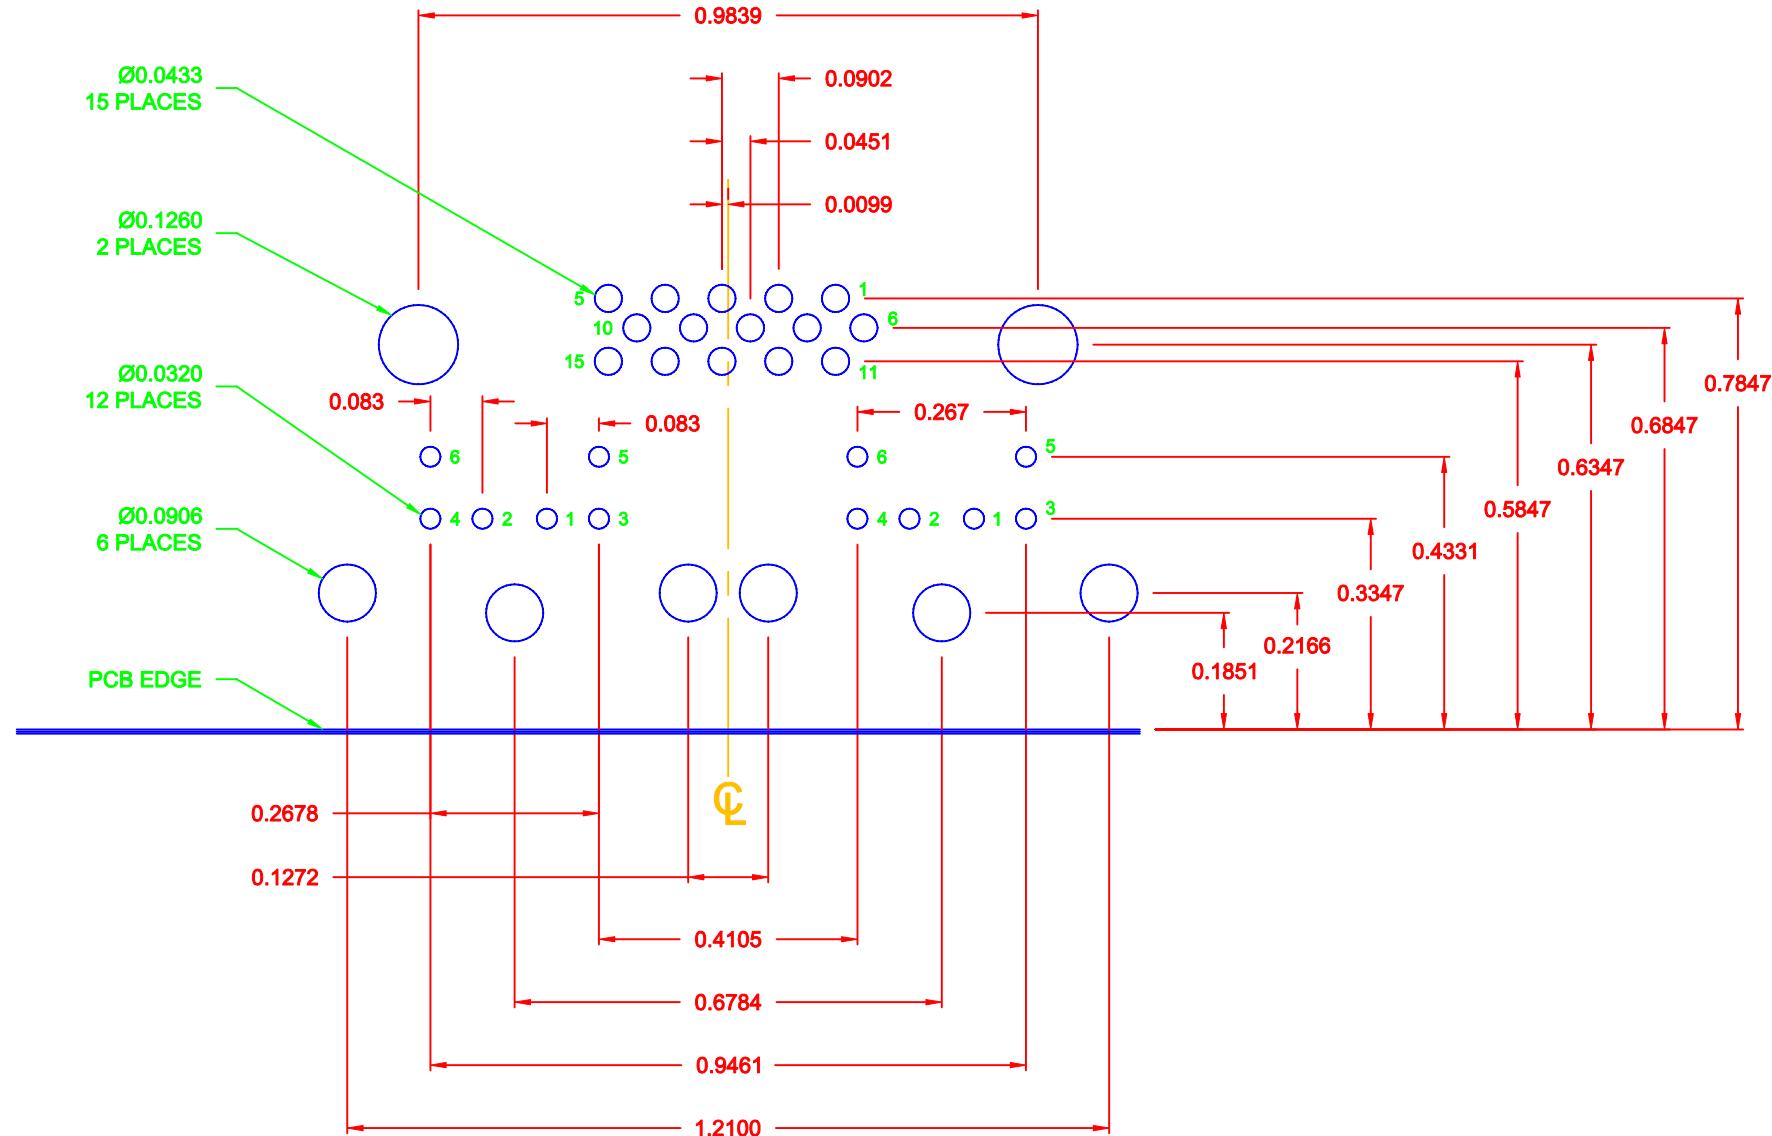

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OF SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: PAM JENKINS DATE: 11-15-05


CHECKED: DATE:

SCALE: 1 : 1 SHEET 2 OF 3 REV 6

DWG NO. 999-H15-PS2L571

RoHS COMPLIANT

NorComp

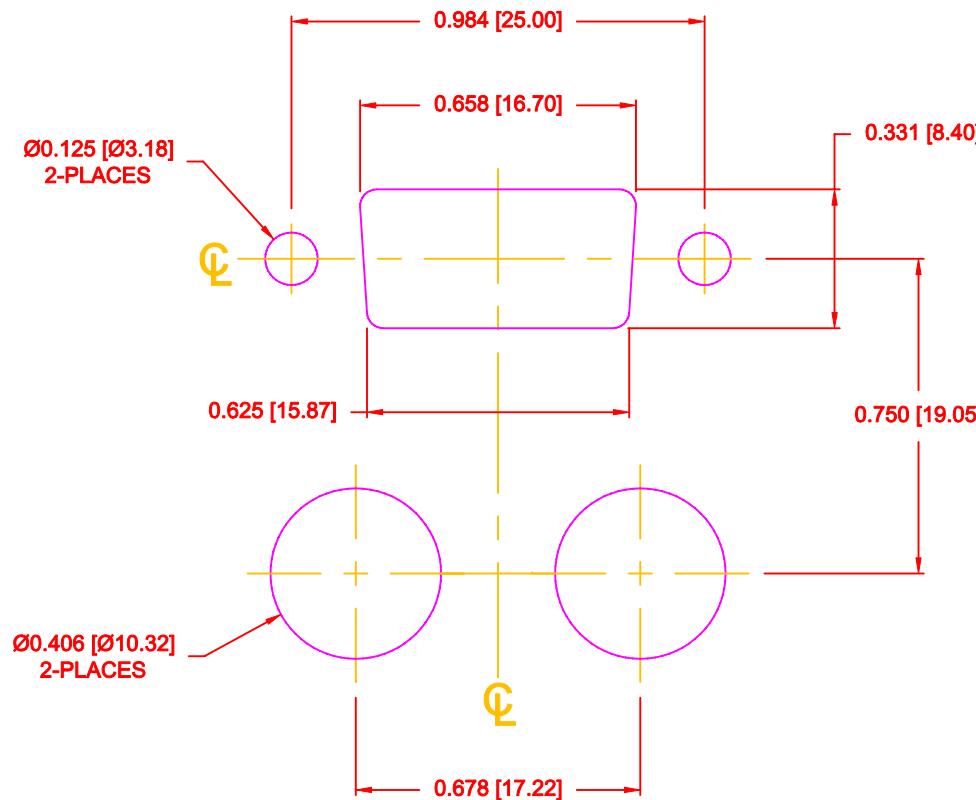

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OF SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

| | | | |
|--------|----------|-------|----------|
| DRAWN: | C. SMITH | DATE: | 08-31-06 |
|--------|----------|-------|----------|

| | | | |
|----------|--|-------|--|
| CHECKED: | | DATE: | |
|----------|--|-------|--|

| | | | | | | | |
|--------|-------|-------|---|----|---|-----|---|
| SCALE: | 2 : 1 | SHEET | 3 | OF | 3 | REV | 6 |
|--------|-------|-------|---|----|---|-----|---|

| | | | | | | |
|---------|-----------------|--|--|--|--|--|
| DWG NO. | 999-H15-PS2L571 | | | | | |
|---------|-----------------|--|--|--|--|--|

RoHS COMPLIANT

NorComp