

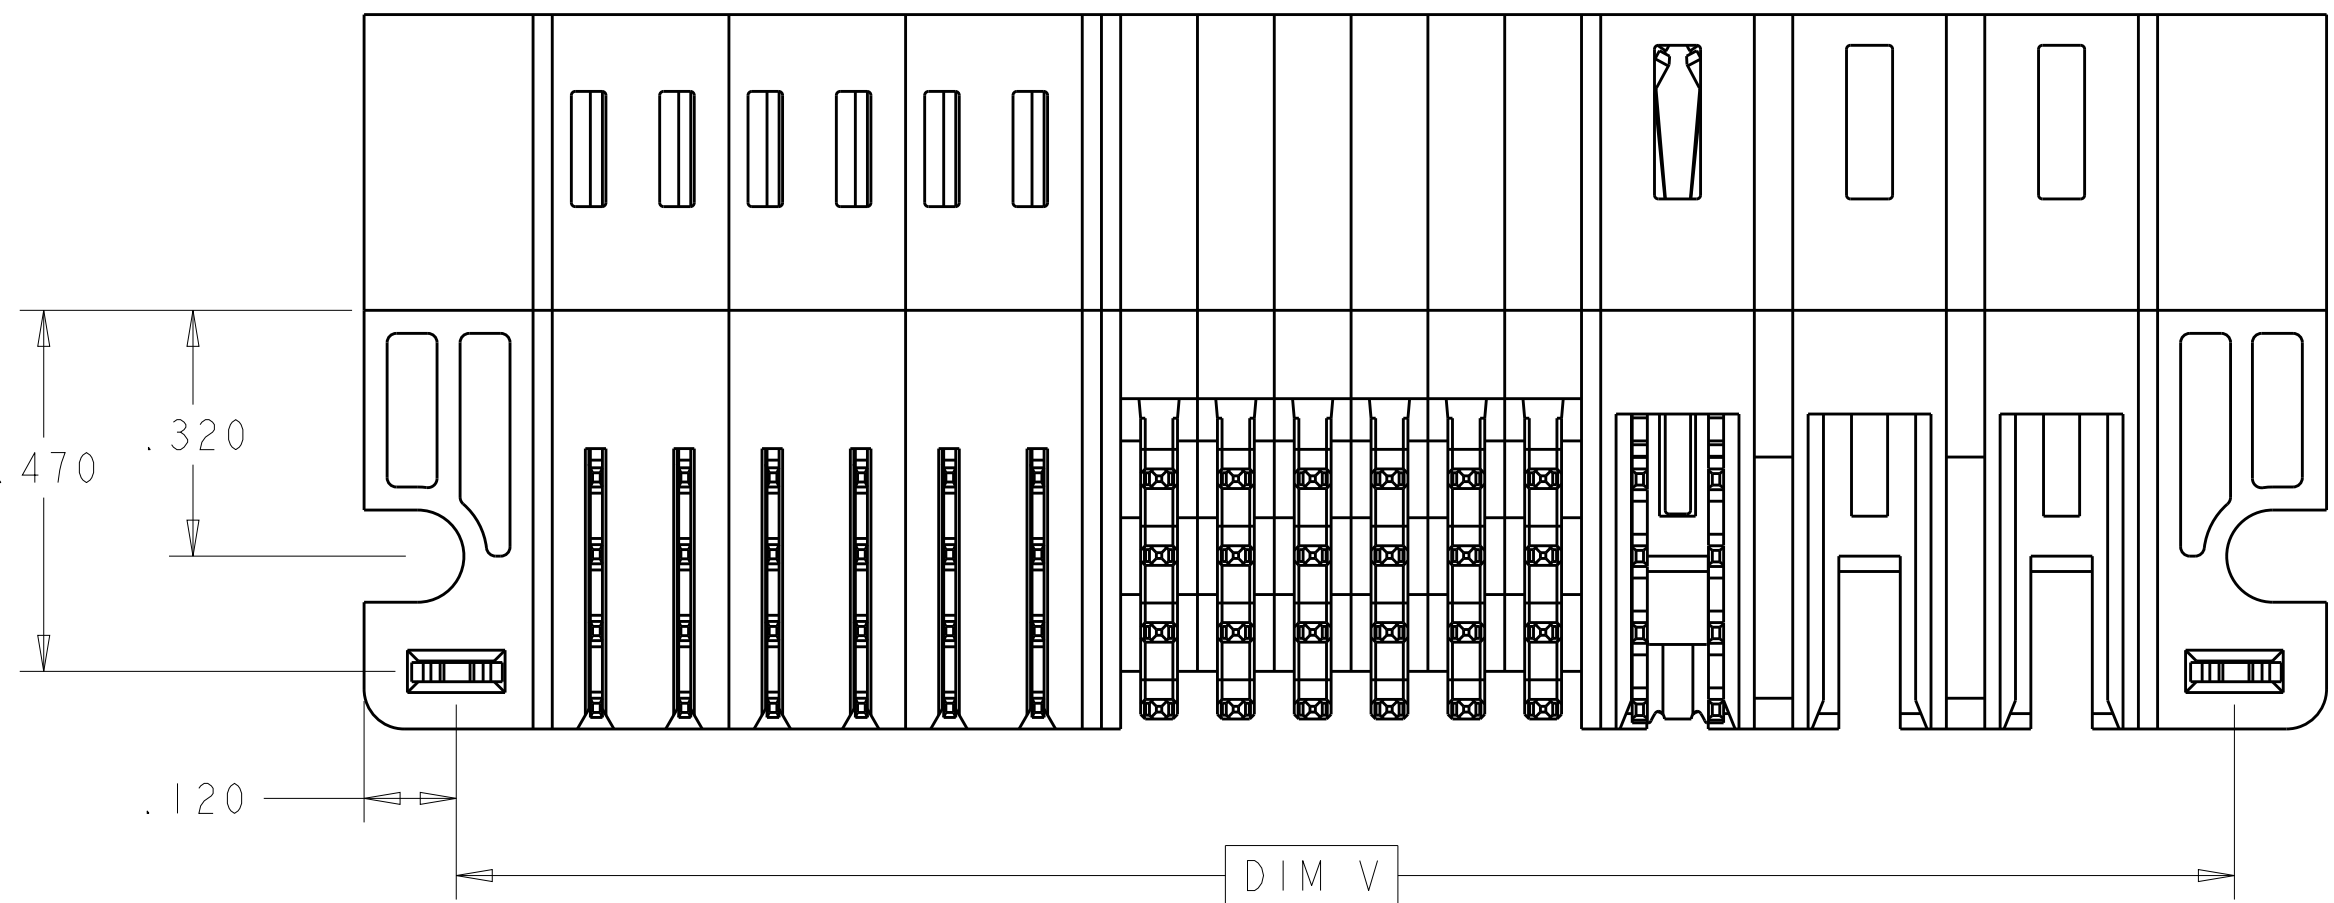
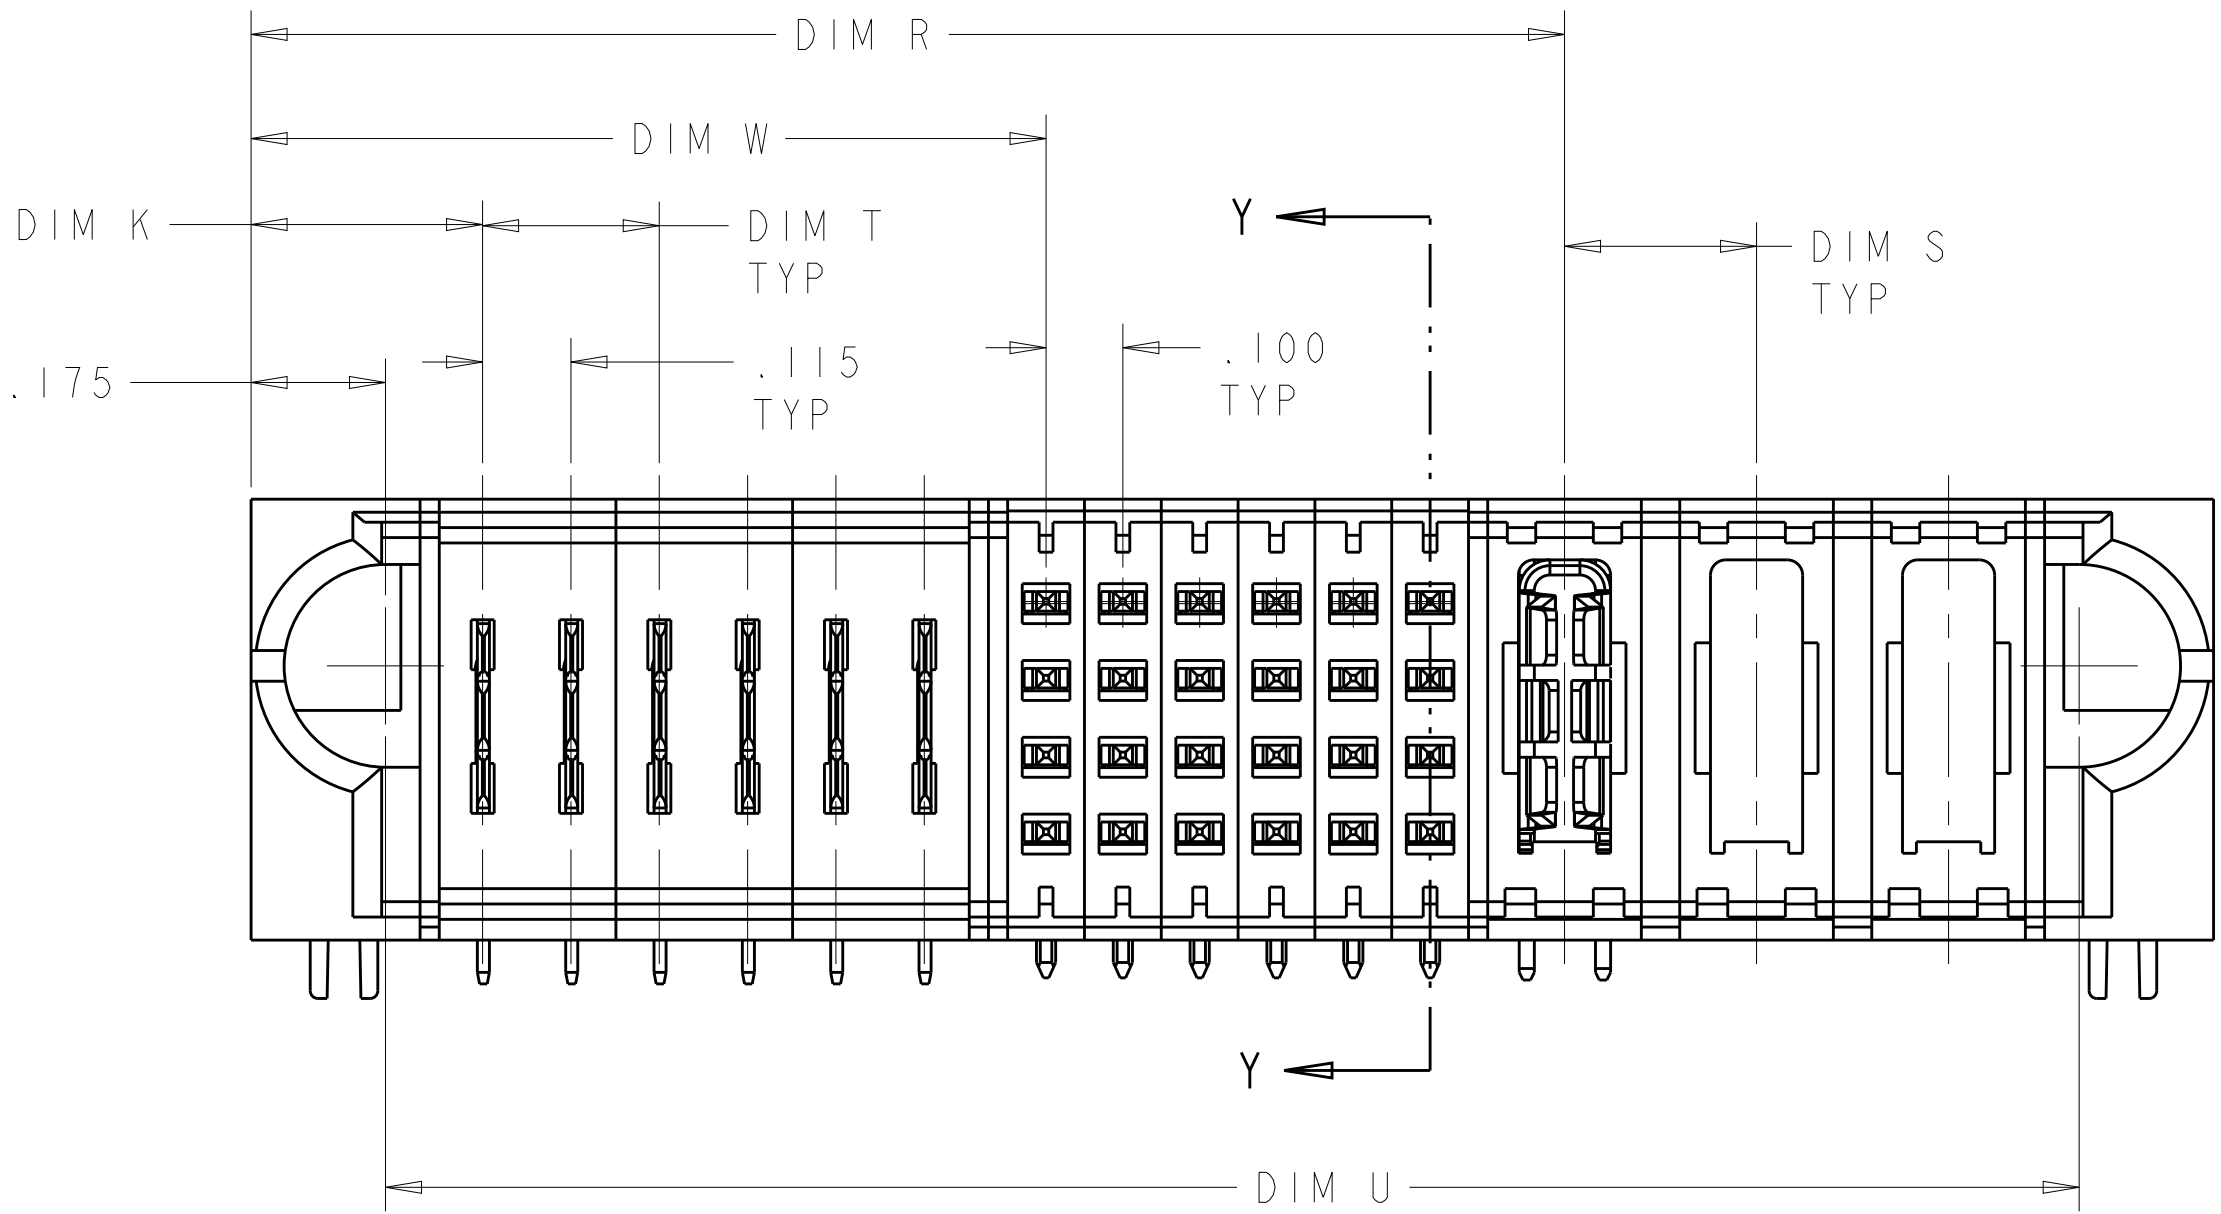
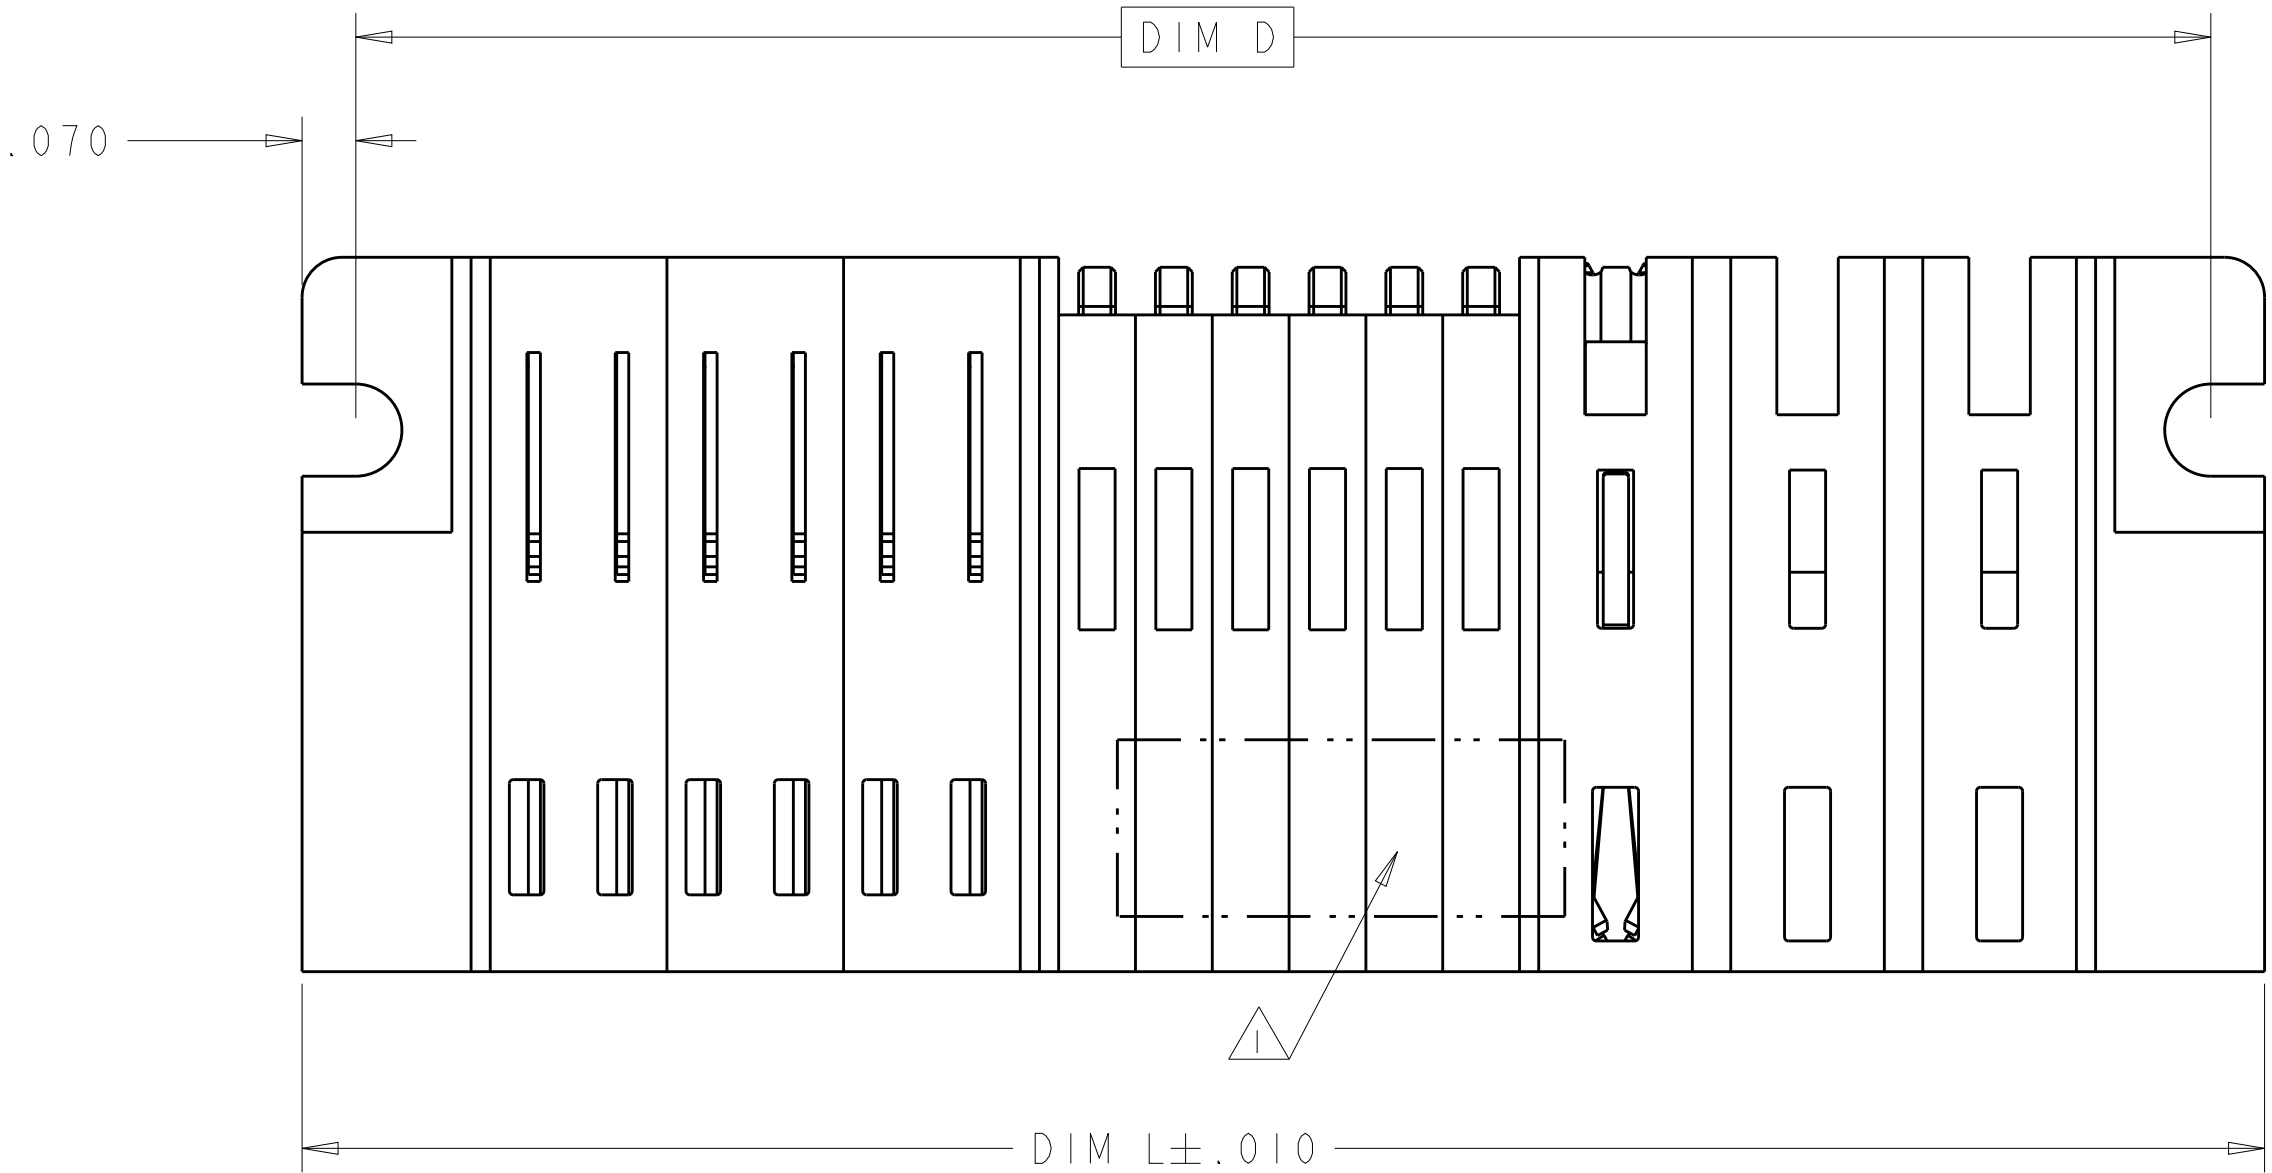


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			R9	REVISED 8-1	05NOV2014	CZ	SZ
			S	ADD NEW DASH NUMBER 8-2	07FEB2015	CZ	SZ
			S2	REVISED 8-2 CUSTOMER	09MAR2015	CZ	SZ

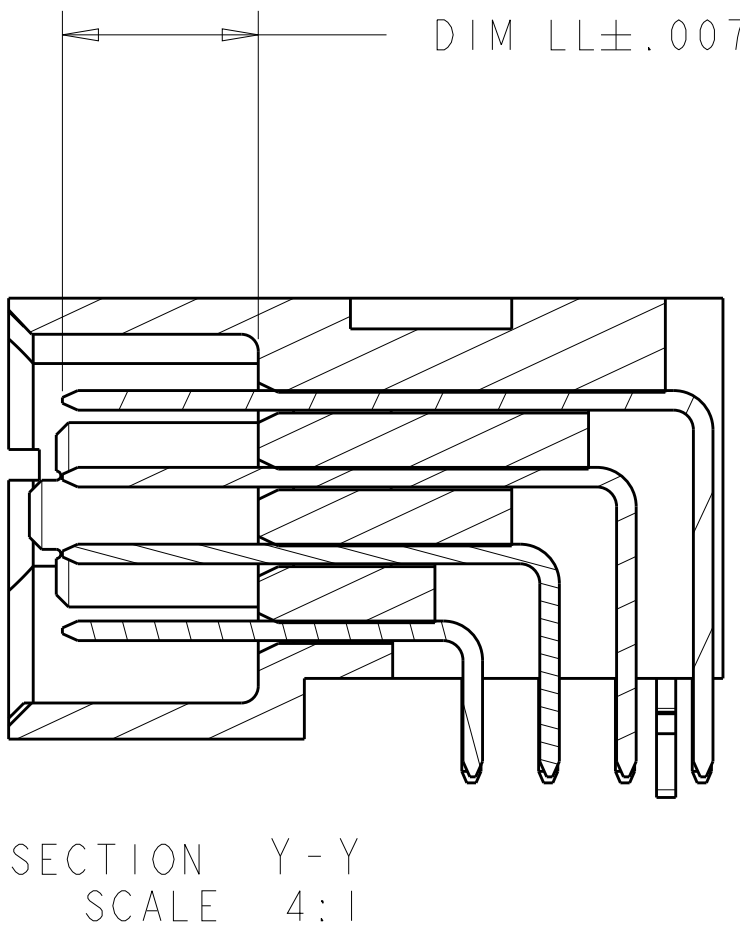

- 1 "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 ±.030 HOLE
- 8 VARIABLE DIMENSIONS SHOW ON TABLE OR PART VIEW
- 9 REFER TO PAGE 10 FOR DETAIL DIMENTIONS.

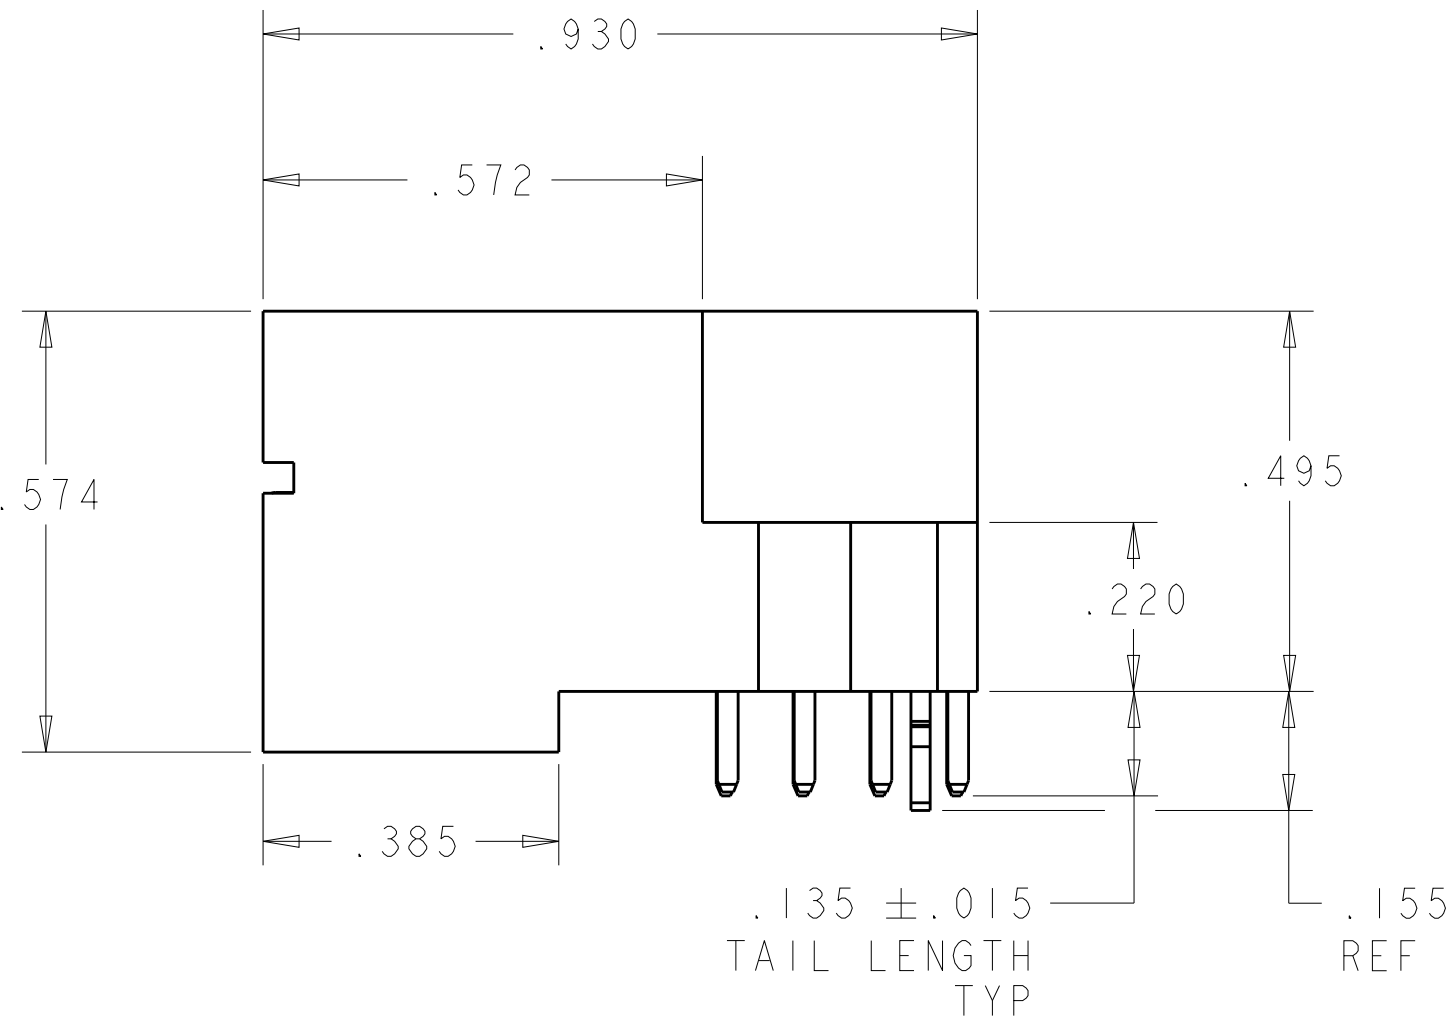

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007	TE Connectivity	
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ±"		PRODUCT SPEC	
		1 PLC ±.01		108-2292	
		2 PLC ±.01		APPLICATION SPEC	
		3 PLC ±.005		114-13251	
		4 PLC ±.0020		WEIGHT	
		ANGLES ±2°		CUSTOMER DRAWING	
MATERIAL : 2		FINISH : 3		SIZE A1	
				CAGE CODE 00779	
				DRAWING NO 6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 1	
				OF 42	
				REV S2	


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

2.100	1.495	1.020	1.990	0.250	0.250	2.200	2.340	.3450	3P + 16S + 3P	7-6450830-3
1.000	.895	.570	.890	-	-	1.100	1.240	.345	1P + 8S + 1P	7-6450830-2
4.750	3.645	3.070	4.640	.250		4.850	4.990	.370	3ACP + 7P + 20S + 5P	7-6450830-1
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	7-6450830-0
3.850	3.4675	1.010	3.740	.230	.230	3.950	4.090	.2775	6LP + 96S + 4LP	6-6450830-9
2.420	2.0375	.780	2.310	.230	.230	2.520	2.660	.2775	4LP + 48S + 4LP	6-6450830-8
5.400	4.5575	1.700	5.290	.230	.230	5.500	5.640	.2775	12LP + 112S + 8LP	6-6450830-7
2.860	2.4775	1.820	2.750	.230	.300	2.960	3.100	.370	5ACP + 24S + 4LP	6-6450830-6
2.225	1.620	1.045	2.115	.250	.250	2.325	2.465	.345	3P + 20S + 3P	6-6450830-4
3.600	2.895	1.795	3.490	.300	.250	3.700	3.840	.345	6P + 40S + 3ACP	6-6450830-3
3.030		1.345 	2.920			3.130	3.270	.345 	5HDP + 24S + 1P + 7LP	6-6450830-2
1.135	.9825	.550	1.025	-	-	1.235	1.375	.2775	2LP + 16S + 2LP	6-6450830-0
3.200	3.120	2.370	3.090	-	.300	3.300	3.440	.320	7ACP + 24S + 1P	5-6450830-8
2.800	1.945	1.270	2.690	.250	.250	2.900	3.040	.345	4P + 24S + 4P	5-6450830-7
2.700	1.595	1.120	2.590	.250	.300	2.800	2.940	.345	3ACP + 16S + 5P	5-6450830-6
2.655	2.5025	2.145	2.545	.115		2.755	2.895	.345	3ACP+3P+12S+2LP	5-6450830-5
1.350	1.020	.745	1.240	.250	.250	1.450	1.590	.320	2P + 8S + 2P	5-6450830-4
2.450	1.595	1.120	2.340	.250	.300	2.550	2.690	.345	3ACP + 16S + 4P	5-6450830-3
2.350	1.670	1.095	2.240	.200	.200	2.450	2.590	.320	4HDP + 20S + 4HDP	5-6450830-2
1.300	1.145	.520	1.190	-	-	1.400	1.540	.345	1P + 24S + 1P	5-6450830-1
1.025	.7575	.550	.915	-	-	1.125	1.265	.2775	2LP + 8S + 3LP	5-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-9
2.995	2.190	1.415	2.885	.350	.280	3.095	3.235	.3025	8LP + 24S + 3P	4-6450830-8
1.280	.875	.575	1.170	.250	-	1.380	1.520	.3015	2LP + 8S + 2P	4-6450830-7
1.750	1.345	.845	1.640	.250	.250	1.850	1.990	.395	2P + 16S + 2P	4-6450830-6
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	4-6450830-5
1.600	1.245	.770	1.490	.250	.250	1.700	1.840	.3450	2P + 16S + 2P	4-6450830-4
6.100	2.195	1.845	5.990	.250	.375	6.200	6.340	.395	4P + 12S + 16P	4-6450830-3
2.500	1.645	1.270	2.390	.250	.250	2.600	2.740	.3450	4P + 12S + 4P	4-6450830-2
3.675	2.445	2.045	3.565	.375	.375	3.775	3.915	.3450	5ACP + 12S + 4ACP	3-6450830-8
1.190	-	1.060	1.080	-	.230	1.290	1.430	.3775	6LP + 8S	3-6450830-7
1.920	1.0775	.870	1.810	-	.300	2.020	2.160	.320	2ACP + 8S + 4LP	3-6450830-6
2.195	1.465	.865	2.085		.215	2.295	2.435	.2775	3LP + 20S + 4HDP	3-6450830-5
4.400	3.220	2.695	4.290		.300	4.500	4.640	.3700	8ACP + 16S + 4ACP	3-6450830-4
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-3
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	3-6450830-1
3.075	2.395	1.920	2.965		.300	3.175	3.3150	.3700	4ACP + 12S + 3P	3-6450830-0
2.160	1.7775	1.145	2.050	-	.300	2.260	2.400	.3450	3ACP + 24S+ 4LP	2-6450830-9
1.600	1.295	.720	1.490	.200	.200	1.700	1.840	.3450	2P + 20S + 2P	2-6450830-8
1.500	1.195	.720	1.390	.200	.200	1.600	1.740	.3450	2P + 16S + 2P	2-6450830-7
1.475	1.320	.595	1.365	-	-	1.575	1.715	.3700	1P + 24S + 1P	2-6450830-6
2.100	1.795	.720	1.990	.200	.200	2.200	2.340	.3450	2P + 40S + 2P	2-6450830-4
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-9
2.460	1.8575	.625	2.350	-	-	2.560	2.700	.1700	1P+2LP+48S+2LP+1P	1-6450830-7
-	-	-	-	-	-	-	-	-	4P+16S+24S+2HDP	1-6450830-8
2.750	2.0450	1.270	2.640	.300	.250	2.850	2.990	.3450	4P + 28S + 3ACP	1-6450830-5
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	1-6450830-4
2.375	1.520	.845	2.265	.250	.300	2.475	2.615	.3450	2ACP + 24S + 4P	1-6450830-3
3.000	2.5025	1.945	2.890	.230		3.000	3.240	.3200	8HDP + 20S + 5LP	1-6450830-2
3.615	1.6850	1.010	3.505		.230	3.715	3.855	.2775	6LP + 24S + 10P	1-6450830-0
2.300	1.6950	1.020	2.190	.250	.250	2.400	2.540	.3450	3P + 24S + 3P	6450830-9
2.480	2.3275	1.520	2.370	-	.250	2.580	2.720	.3450	5P + 32S + 2LP	6450830-8
3.400	2.2950	1.570	3.290	.250	.250	3.500	3.640	.3450	5P + 24S + 5P	6450830-7
1.800	1.4450	.770	1.690	.250	.250	1.900	2.040	.3450	2P + 24S + 2P	6450830-5
1.780	1.6025	.770	1.670	-	.250	1.880	2.020	.3450	2P + 32S + 2LP	6450830-4
2.310	1.6725	1.240	2.200	.230	.230	2.410	2.550	.3025	8LP + 16S + 6LP	6450830-3
2.315	1.7100	1.035	2.205	.250	.230	2.415	2.555	.3025	6LP + 24S + 3P	6450830-2
.935	.7825	.550	.825	-	-	1.035	1.175	.2775	2LP + 8S + 2LP	6450830-1
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

4.350	2.405	1.380	4.240			4.450	4.590	.2775	9LP + 36S + 1P + 16LP	8-6450830-2
4.500	2.170	.795	4.390			4.600	4.740	.345	2P + 48S + 10P	8-6450830-1
2.250	1.645	1.170	2.140	.250	.300	2.300	2.490	.370	3ACP + 16S + 3P	8-6450830-0
4.300	2.695	2.020	4.190	.250	.250	4.400	4.540	.345	7P + 24S + 7P	7-6450830-9
4.180	3.325	1.700	4.070	.250	.230	4.280	4.420	.2775	12LP + 60S + 4P	7-6450830-8
2.650	2.545	1.270	2.540	-	.250	2.750	2.890	.345	4P + 48S + 1P	7-6450830-7
1.750	1.3675	1.060	1.755	.230	.230	1.850	1.990	.2775	3LP + 12S + 4LP	7-6450830-6
DIM V	DIM R	DIM W	DIM U	DIM S	DIM T	DIM D	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±.01
±.005
±.0020
#P

DWN
CHK
S. ZHAO

S. ZHAO

10APR2007

10APR2007

APVD
S. ZHAO

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

NAME
S. ZHAO

RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450830

RESTRICTED TO
-

SCALE
4:1


SHEET
2

OF
42


REV
S2

4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

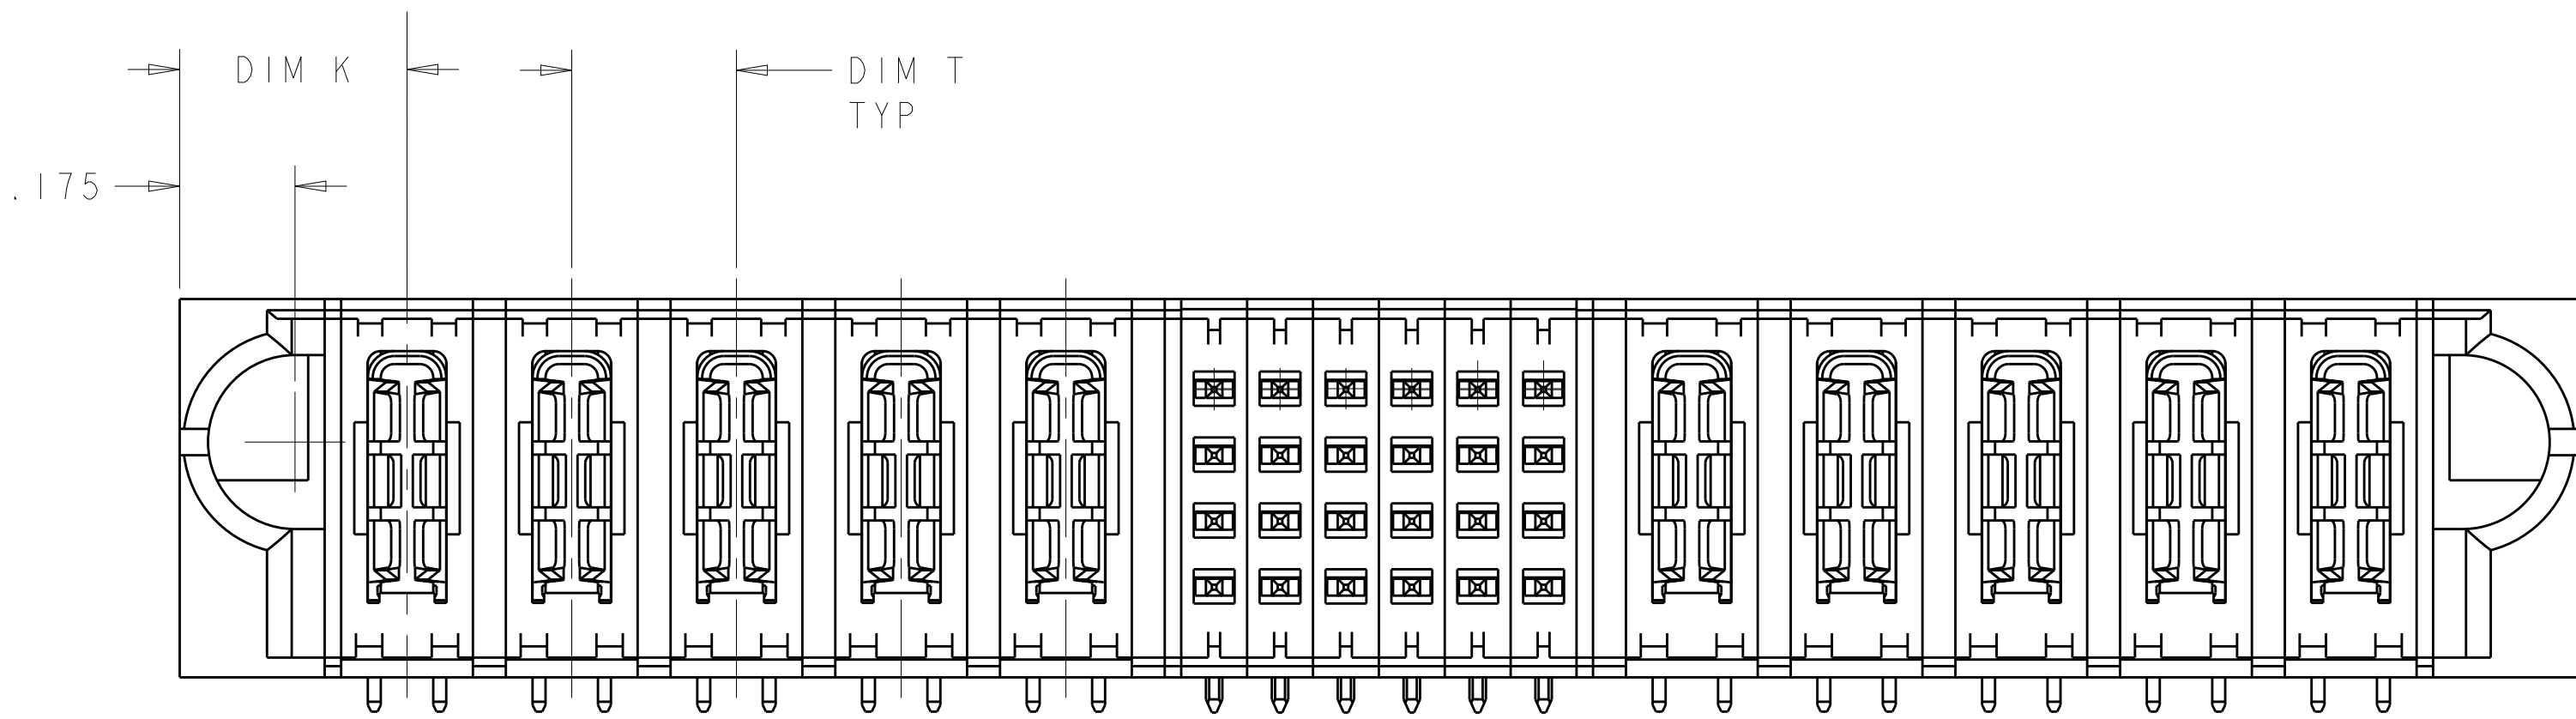


FOR "P+S+P"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1

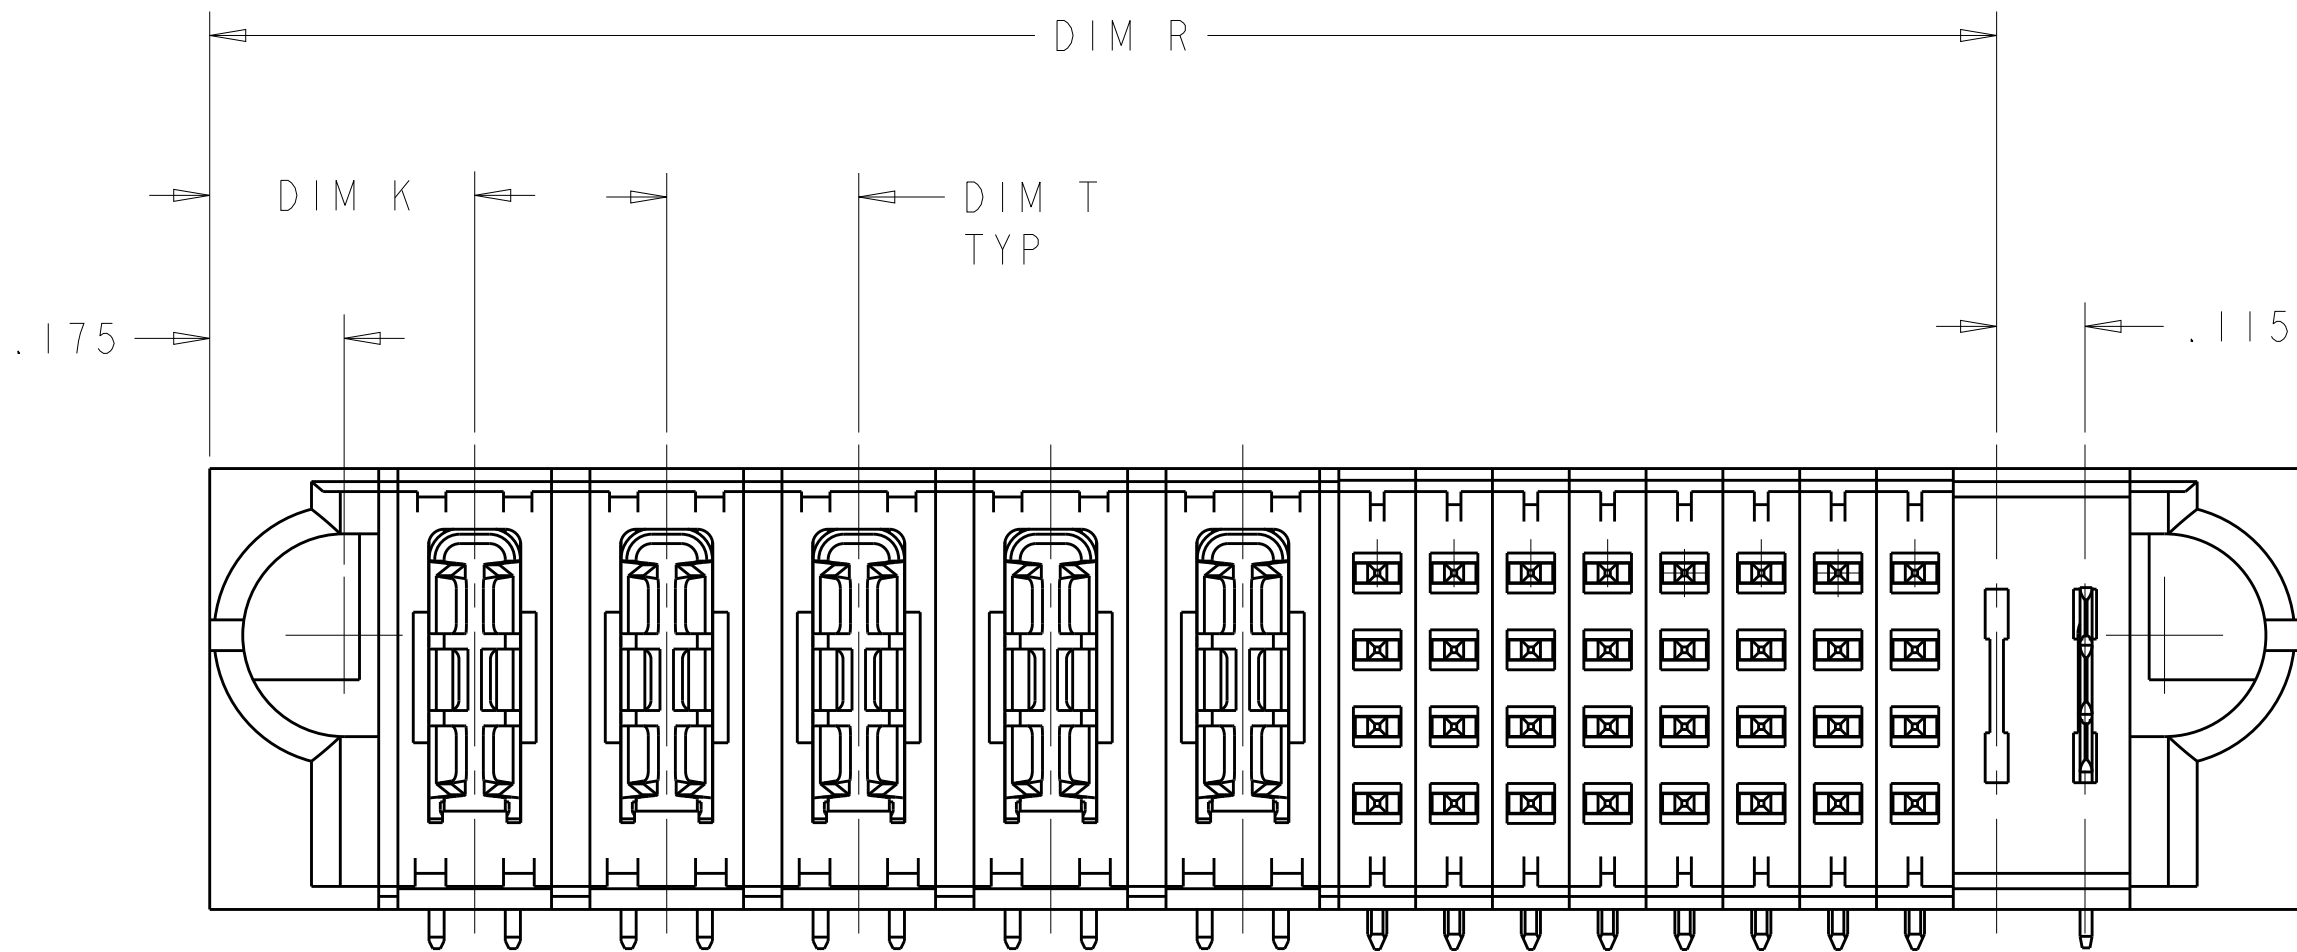

FOR "P+S+LP"CONFIGURATION
UNSPECIFY DIMENSIONS PLEASE REFER TO PAGE 1


HOLD DOWN	HD
.135 SIGNAL CON, ROW D,MFBL LL=.304	FJ
.135 SIGNAL CON, ROW C,MFBL LL=.304	FK
.135 SIGNAL CON, ROW B,MFBL LL=.304	FN
.135 SIGNAL CON, ROW A,MFBL LL=.304	FS
.135 SIGNAL CON, ROW D,MLBF LL=.204	E
.135 SIGNAL CON, ROW C,MLBF LL=.204	F
.135 SIGNAL CON, ROW B,MLBF LL=.204	G
.135 SIGNAL CON, ROW A,MLBF LL=.204	H
.135 SIGNAL CON, ROW D,STANDARD LL=.254	J
.135 SIGNAL CON, ROW C,STANDARD LL=.254	K
.135 SIGNAL CON, ROW B,STANDARD LL=.254	N
.135 SIGNAL CON, ROW A,STANDARD LL=.254	S
.135 STANDARD POWER CON,3 BEAMS	TM
.135 SOLDER LOWER POWER,MFBL	LMF
.135 SOLDER LOWER POWER,STD	LM
.135 SOLDER LOWER POWER,MLBF	LML
DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S.ZHAO 10APR2007	TE TE Connectivity		
DIMENSIONS: INCHES		CHK S.ZHAO 10APR2007			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.01 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	APVD S.ZHAO	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE		
		PRODUCT SPEC	SIZE A		
		108-2292	CAGE CODE 00779		
		APPLICATION SPEC	DRAWING NO 6450830		
MATERIAL		114-13251	RESTRICTED TO		
		WEIGHT	SCALE 4:1		
		CUSTOMER DRAWING	SHEET 3 OF 42		
			REV S2		

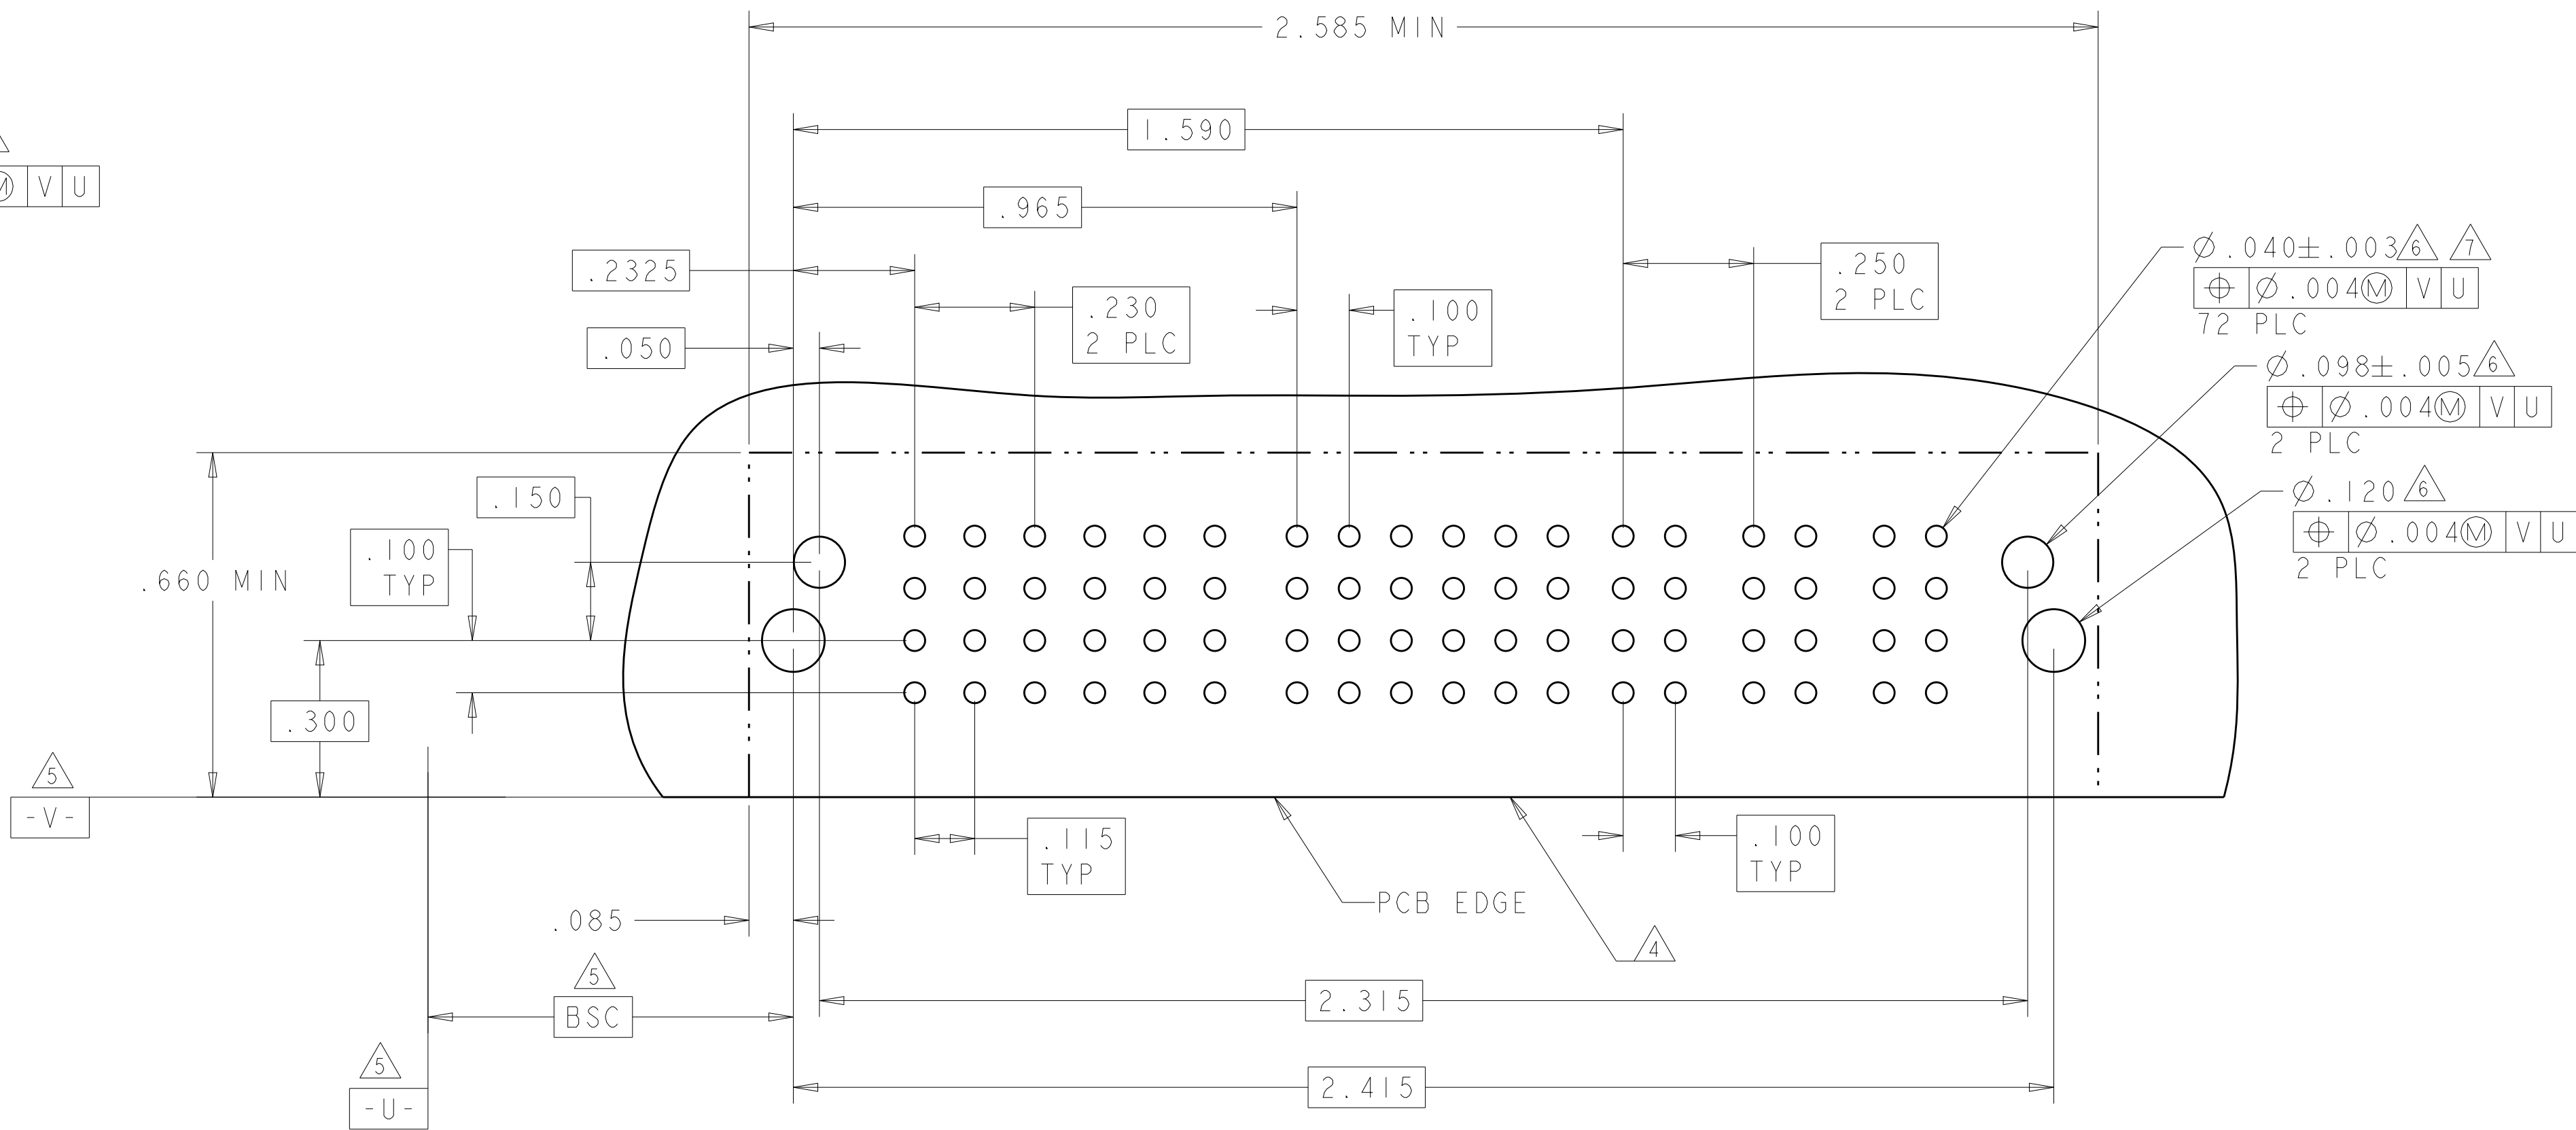
[illegible]4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION		DATE	DWN	APVD
		-		SEE SHEET 1		-	-	-

PART NUMBER	ROWS		POWER								SIGNAL				POWER						
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	1	2	3	4	LP9	LP10	LP11	LP12	LP13	LP14	
6450830-3	D C B A										J	J	J	J							
											K	K	K	K							
											N	N	N	N							
											S	S	S	S							
8LP + 16S + 6LP																					

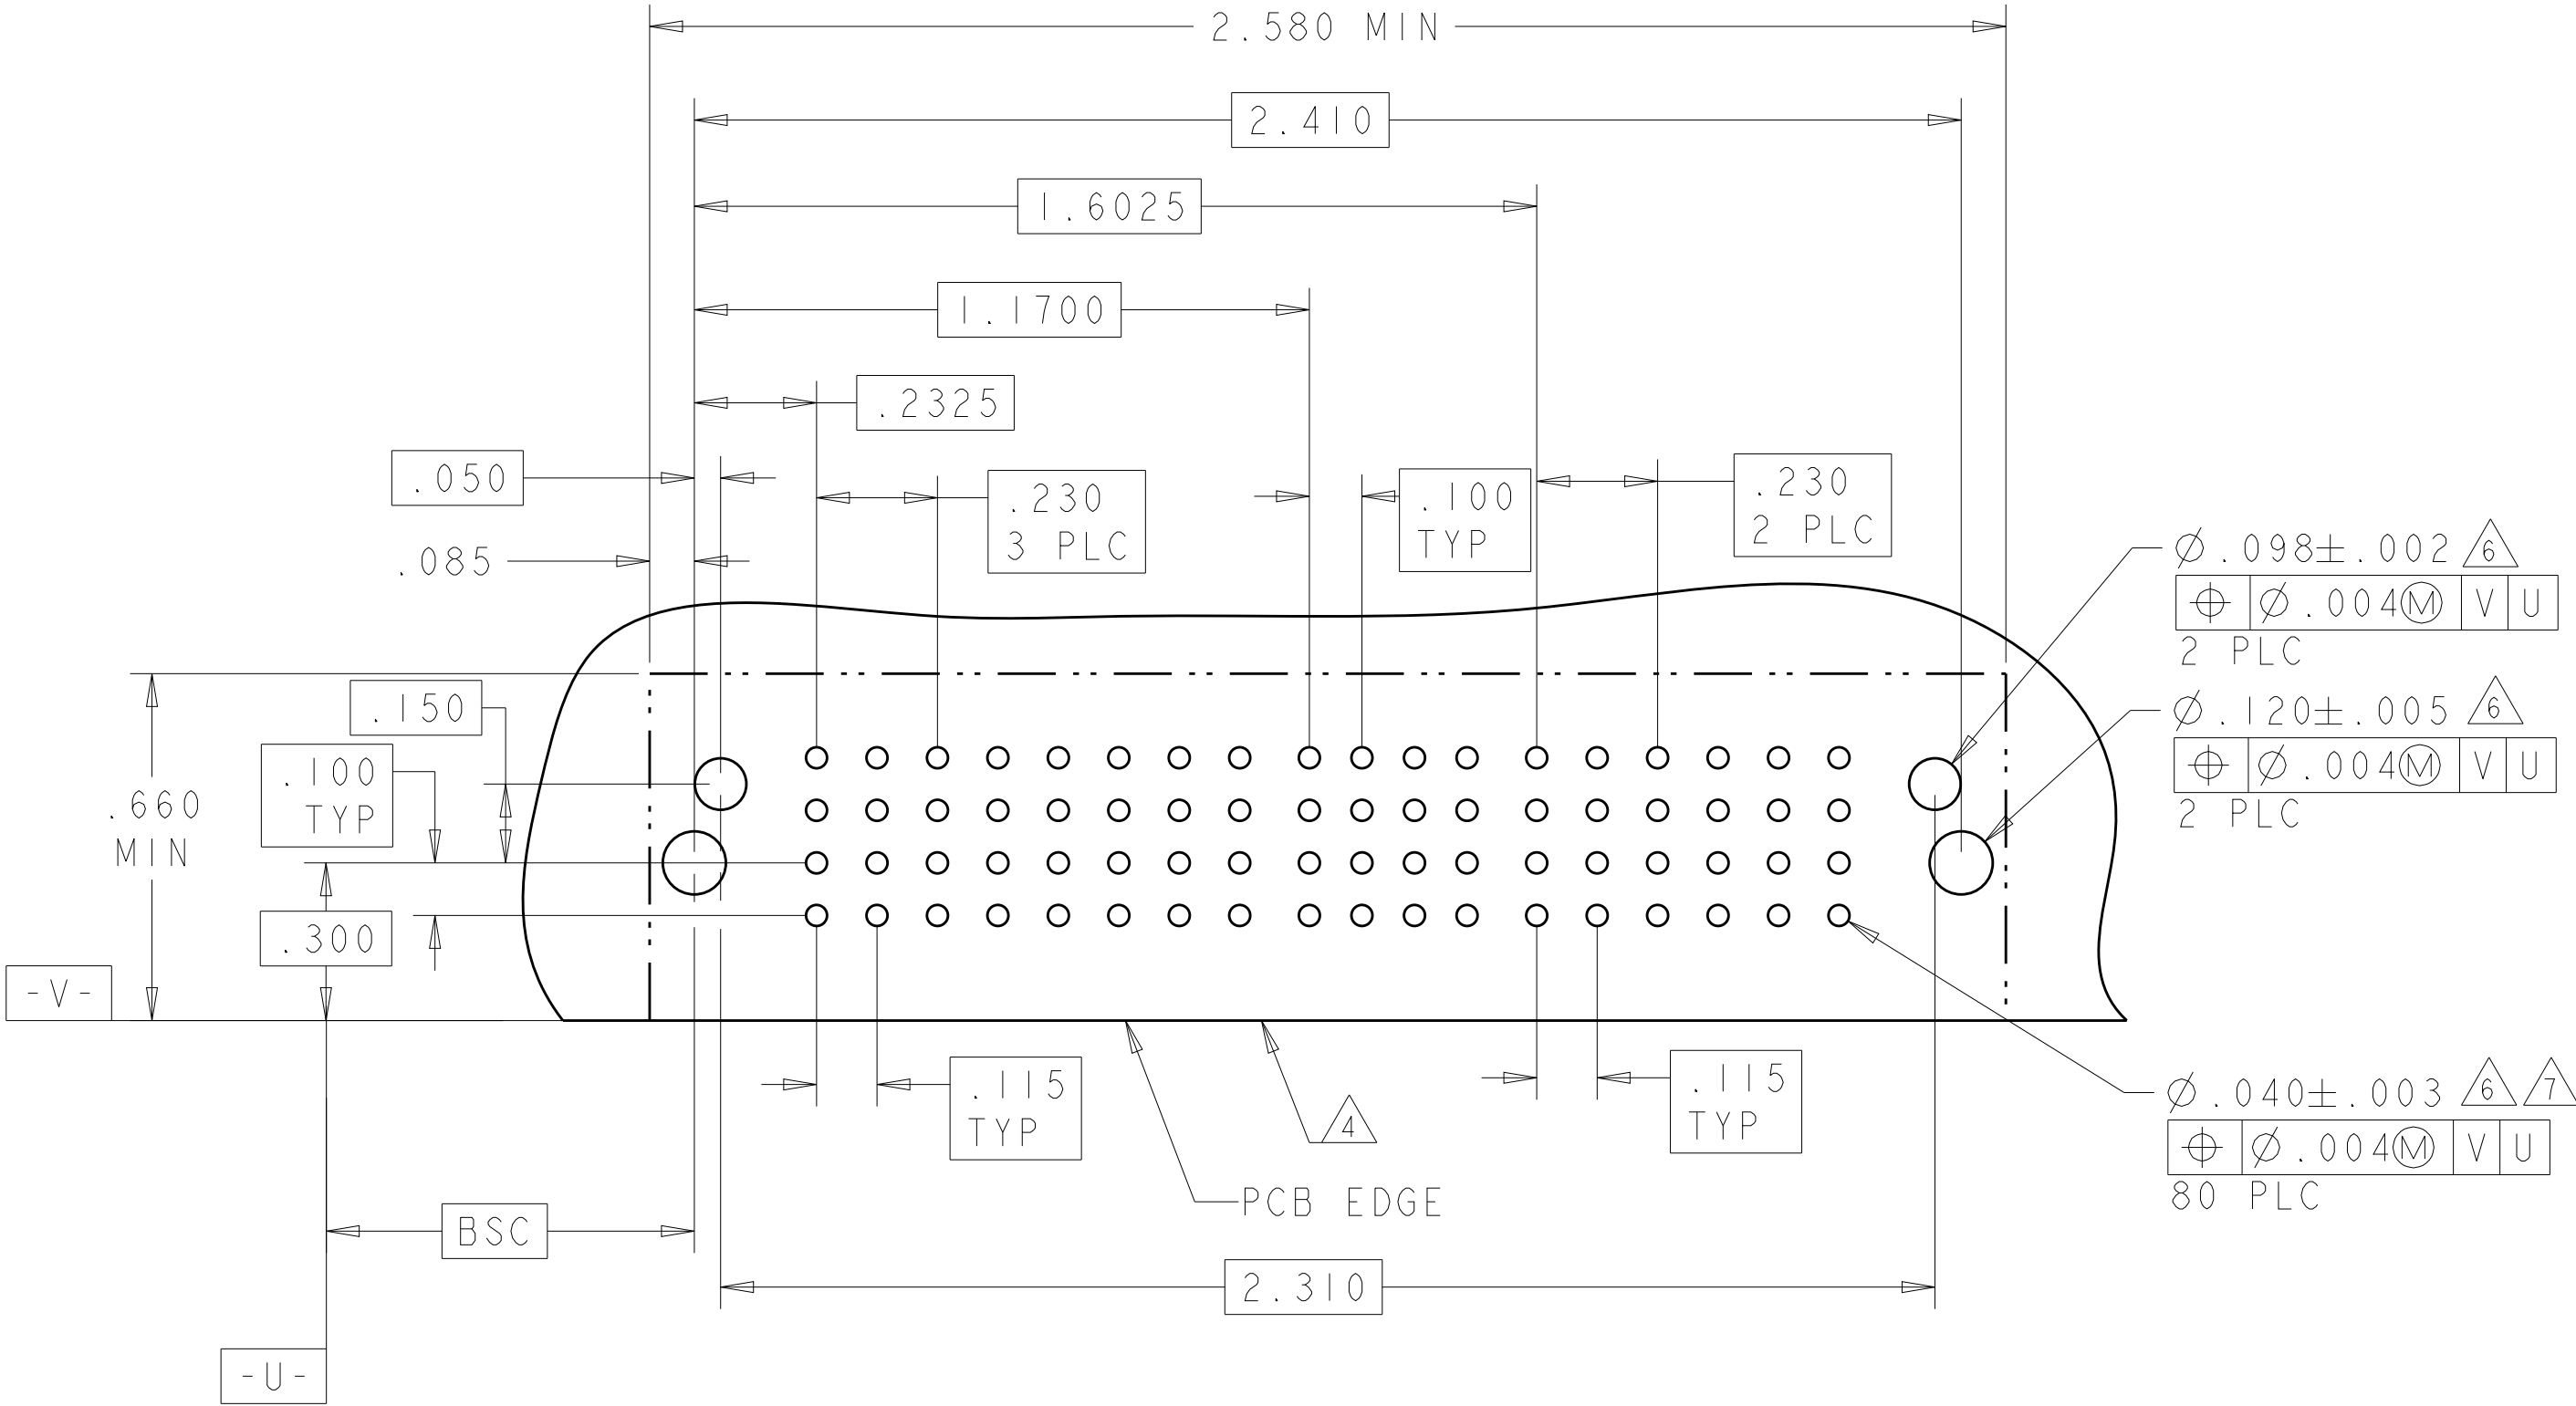

PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			P1	P2	1	2	3	4	5	6	7	8	LPI	LP2	
6450830-4	D C B A		TM	TM	J	J	J	J	J	J	J	J	LM	LM	
					K	K	K	K	K	K	K	K			
					N	N	N	N	N	N	N	N			
					S	S	S	S	S	S	S	S			
2P + 32S + 2LP															

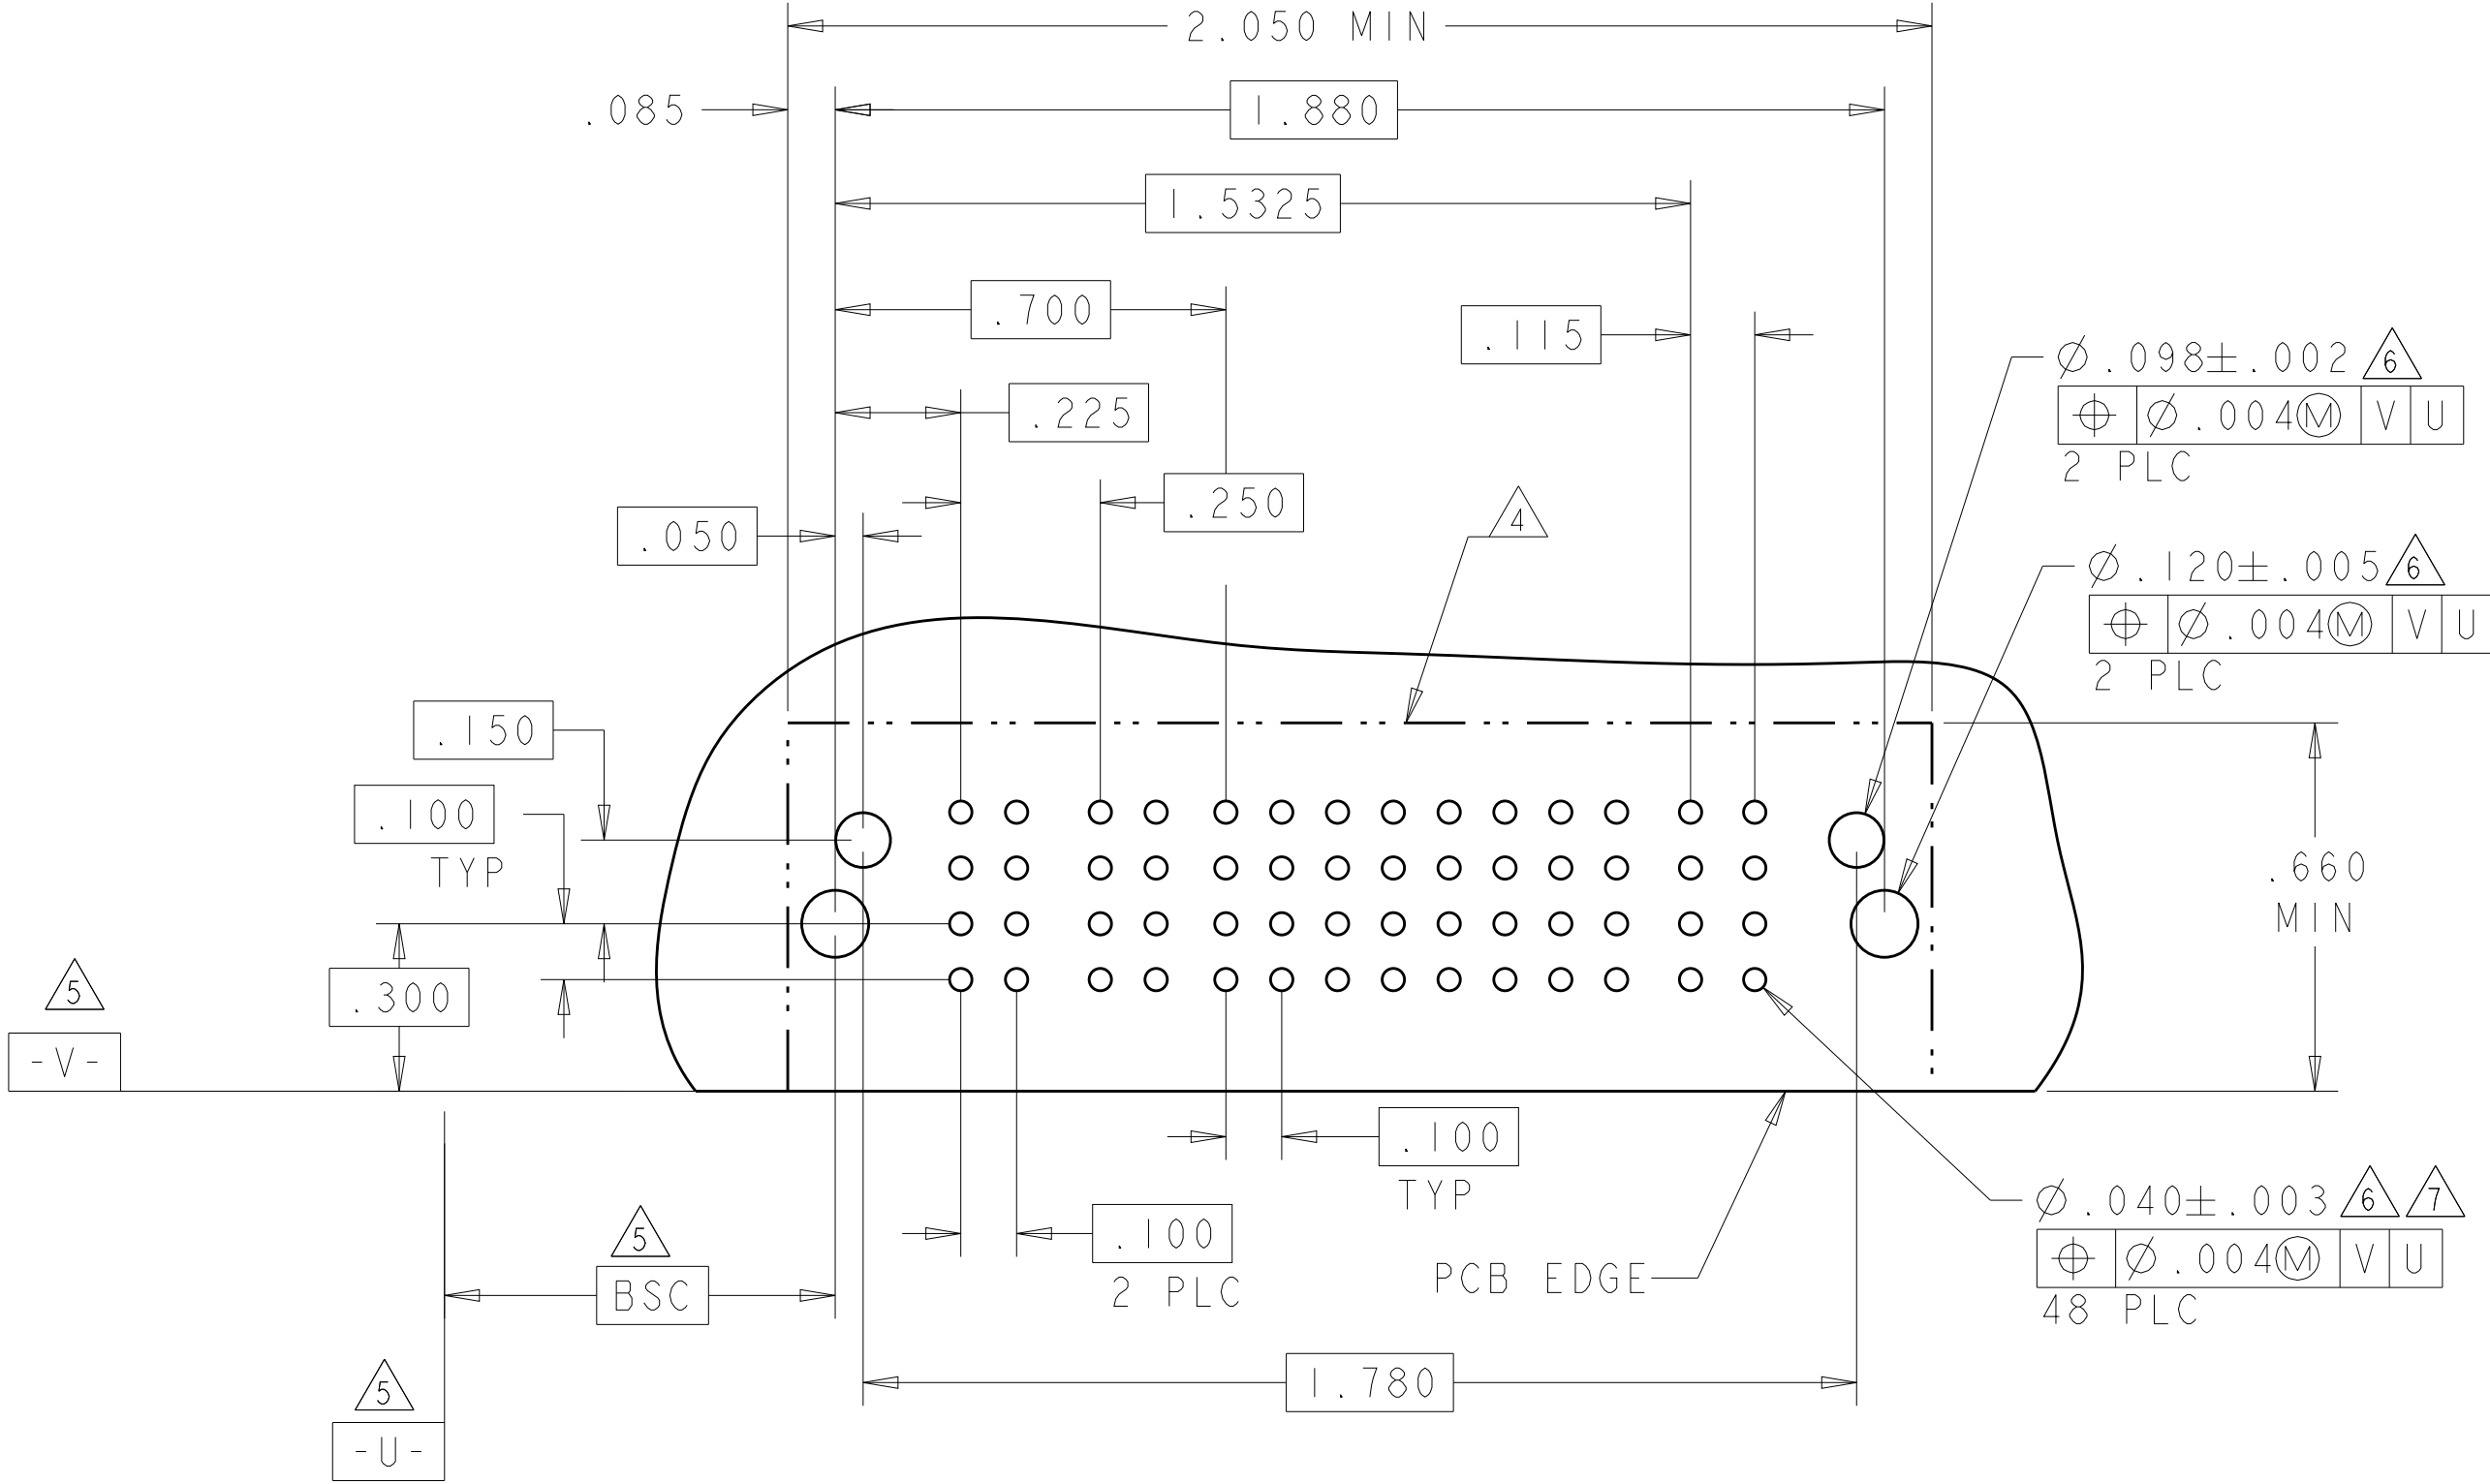

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S. ZHAO
CHK
S. ZHAO
APVD
S. ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

CUSTOMER DRAWING

SCALE 4:1
SHEET 5 OF 42
REV S2

TE Connectivity

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE



SIZE A1
CAGE CODE 00779
DRAWING NO. C=6450830

RESTRICTED TO
-

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P1	P2	1	2	3	4	5	6	P3	P4	
6450830-5	D C B A		TM	TM	J	J	J	J	J	J	TM	TM	
					K	K	K	K	K	K			
					N	N	N	N	N	N			
					S	S	S	S	S	S			
2P + 24S + 2P													

PART NUMBER	ROWS		POWER					SIGNAL						POWER						
			P1	P2	P3	P4	P5	1	2	3	4	5	6	P6	P7	P8	P9	P10		
6450830-7	D C B A			TM	TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	TM	
									K	K	K	K	K	K						
									N	N	N	N	N	N						
									S	S	S	S	S	S						
5P + 24S + 5P																				

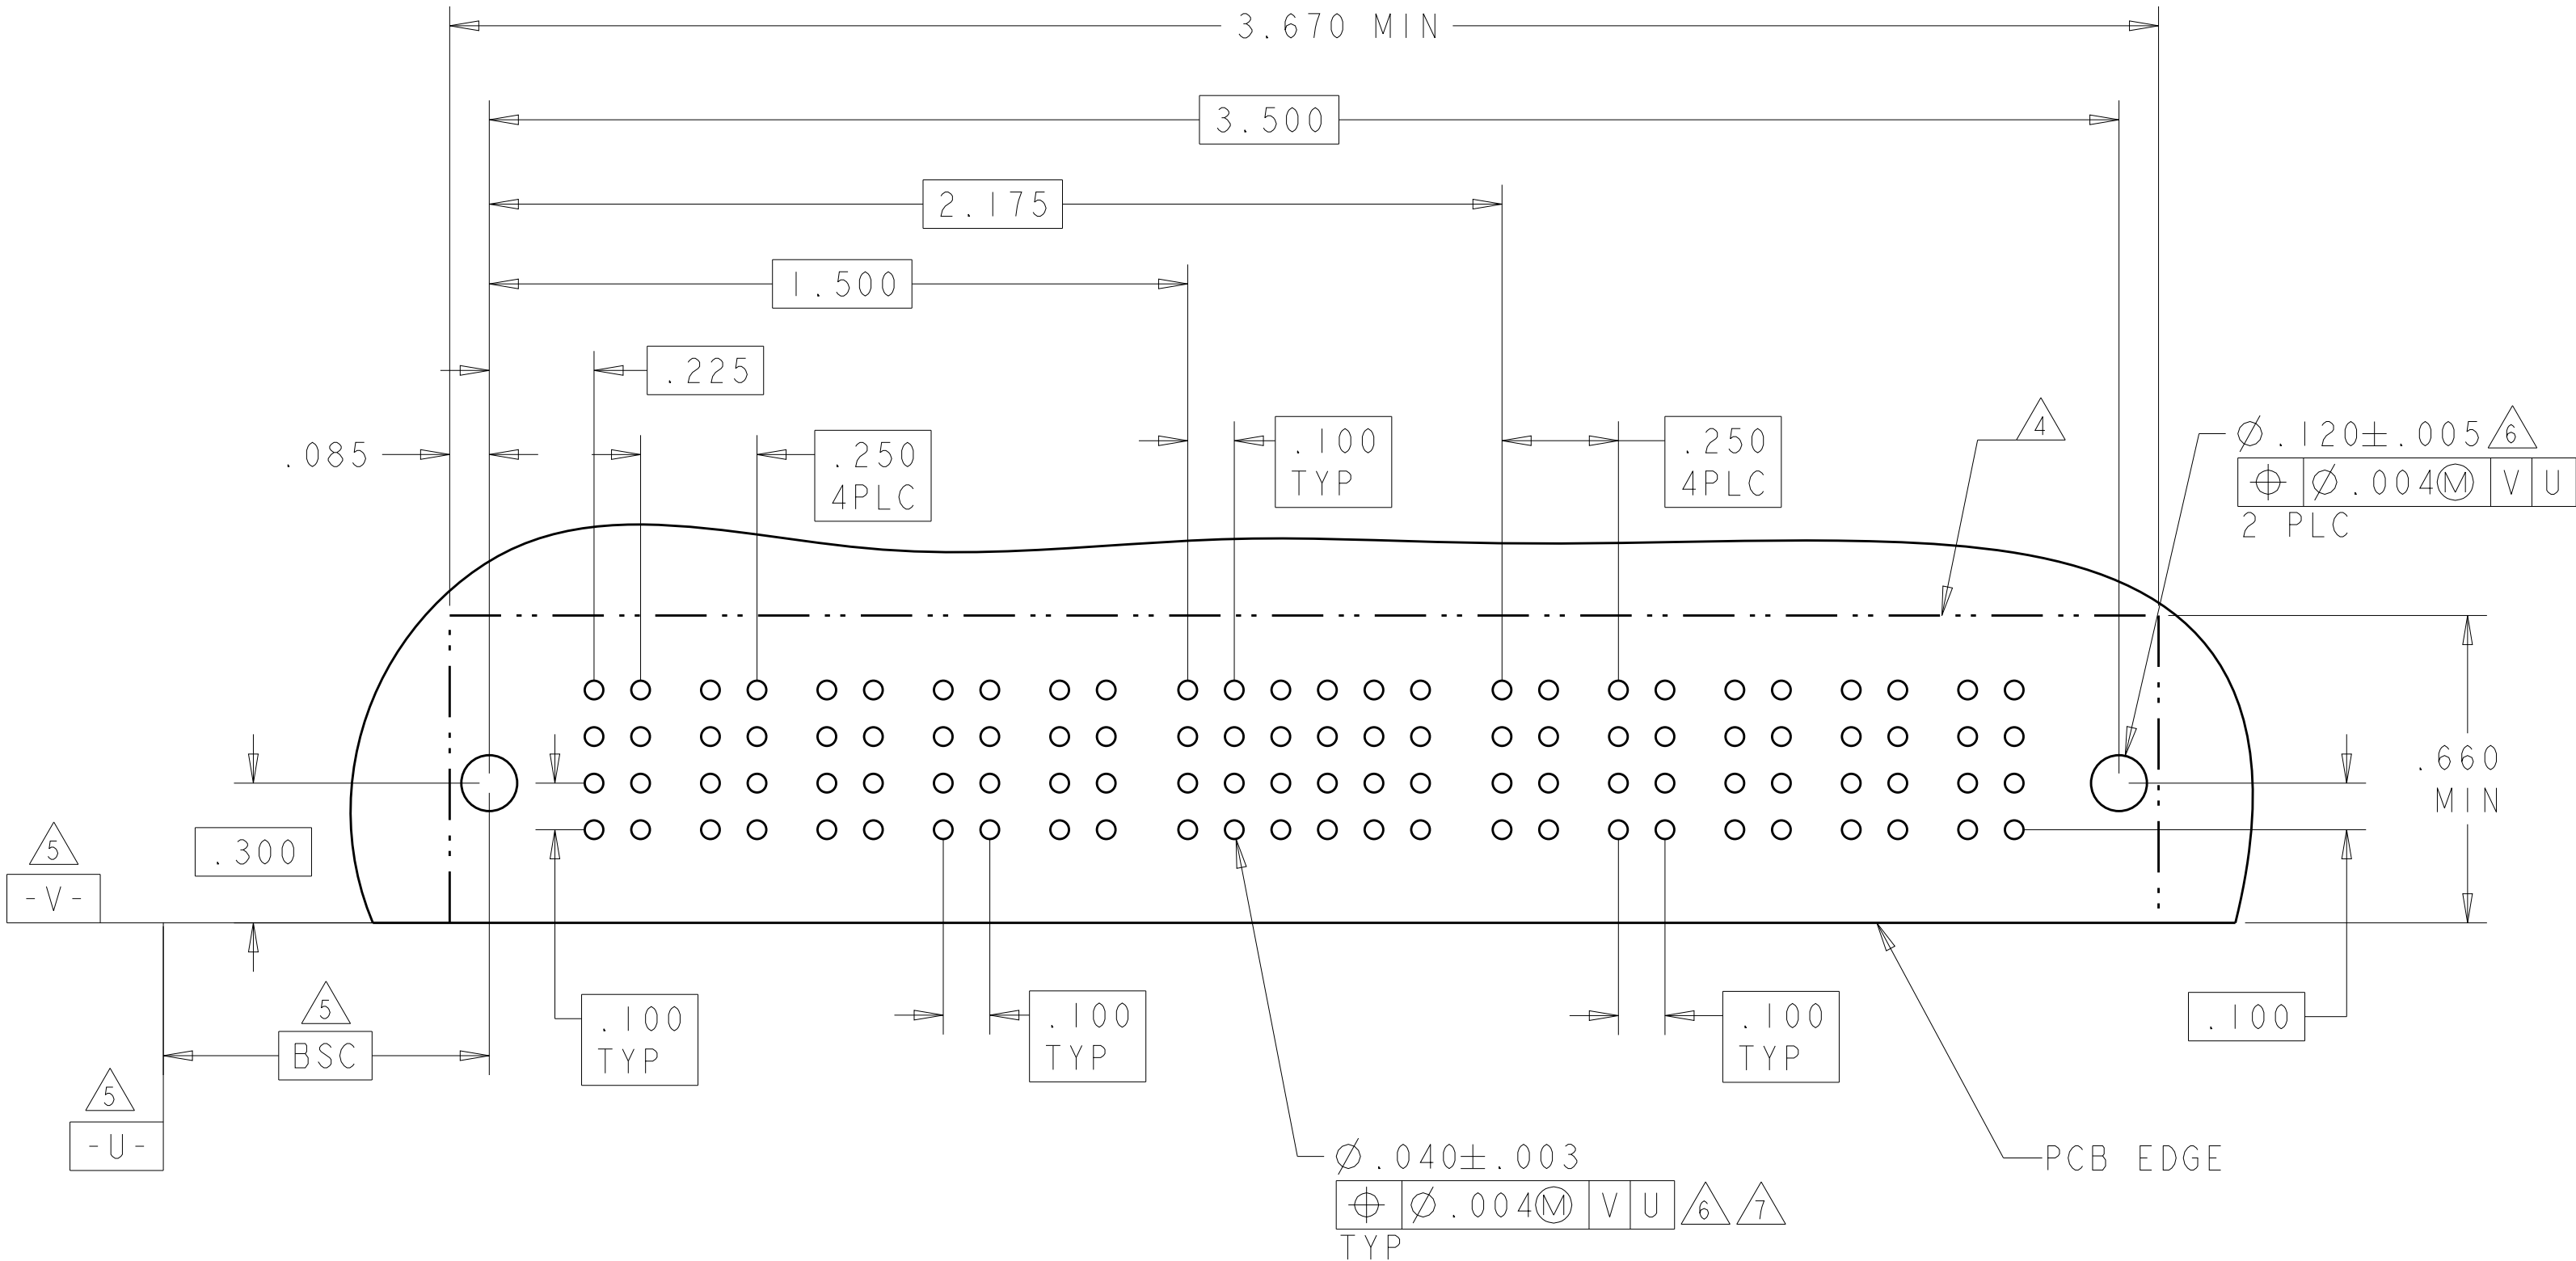
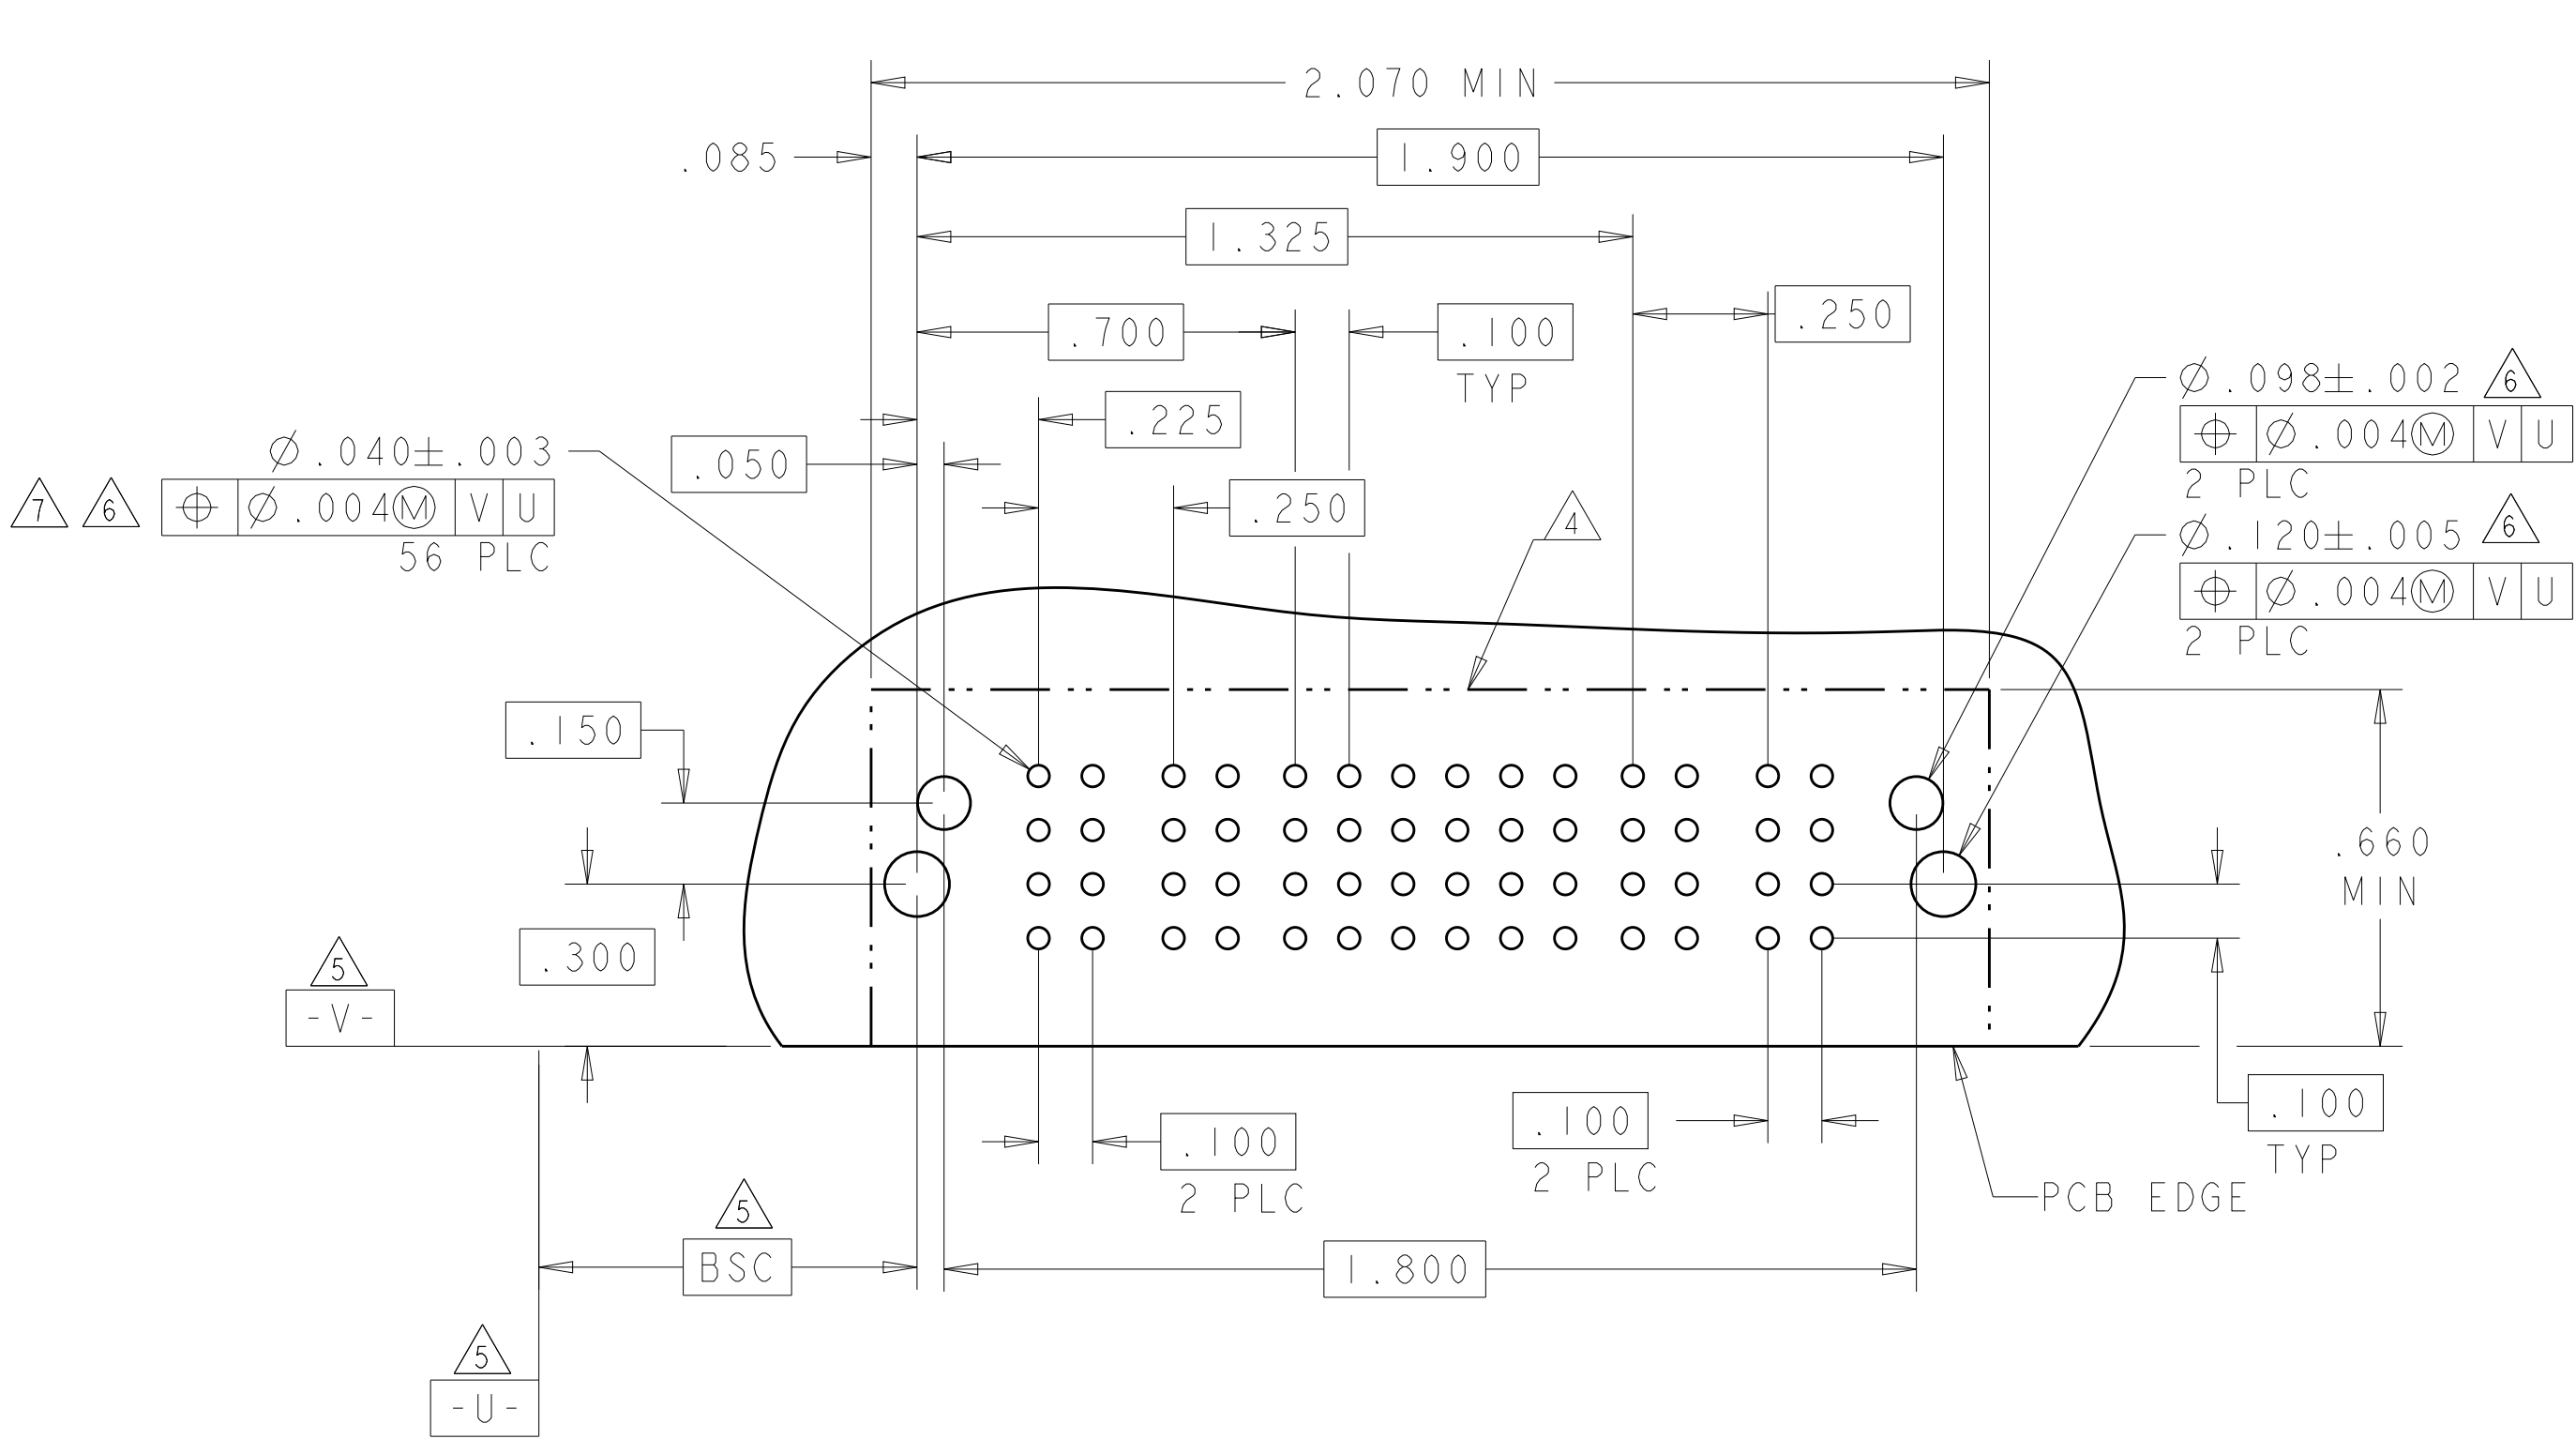



LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER					SIGNAL								POWER		
			P1	P2	P3	P4	P5	1	2	3	4	5	6	5	6	P6	P7	
6450830-8	D							J	J	J	J	J	J	J	J			
	K							K	K	K	K	K	K	K				
	N							N	N	N	N	N	N	N				
	S							S	S	S	S	S	S	S				
5P + 32S + 2LP																		

NO CONTACT LOADED


PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
6450830-9	D		TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	
	K					K	K	K	K	K					
	N					N	N	N	N	N					
	S					S	S	S	S	S					
3P + 24S + 3P															

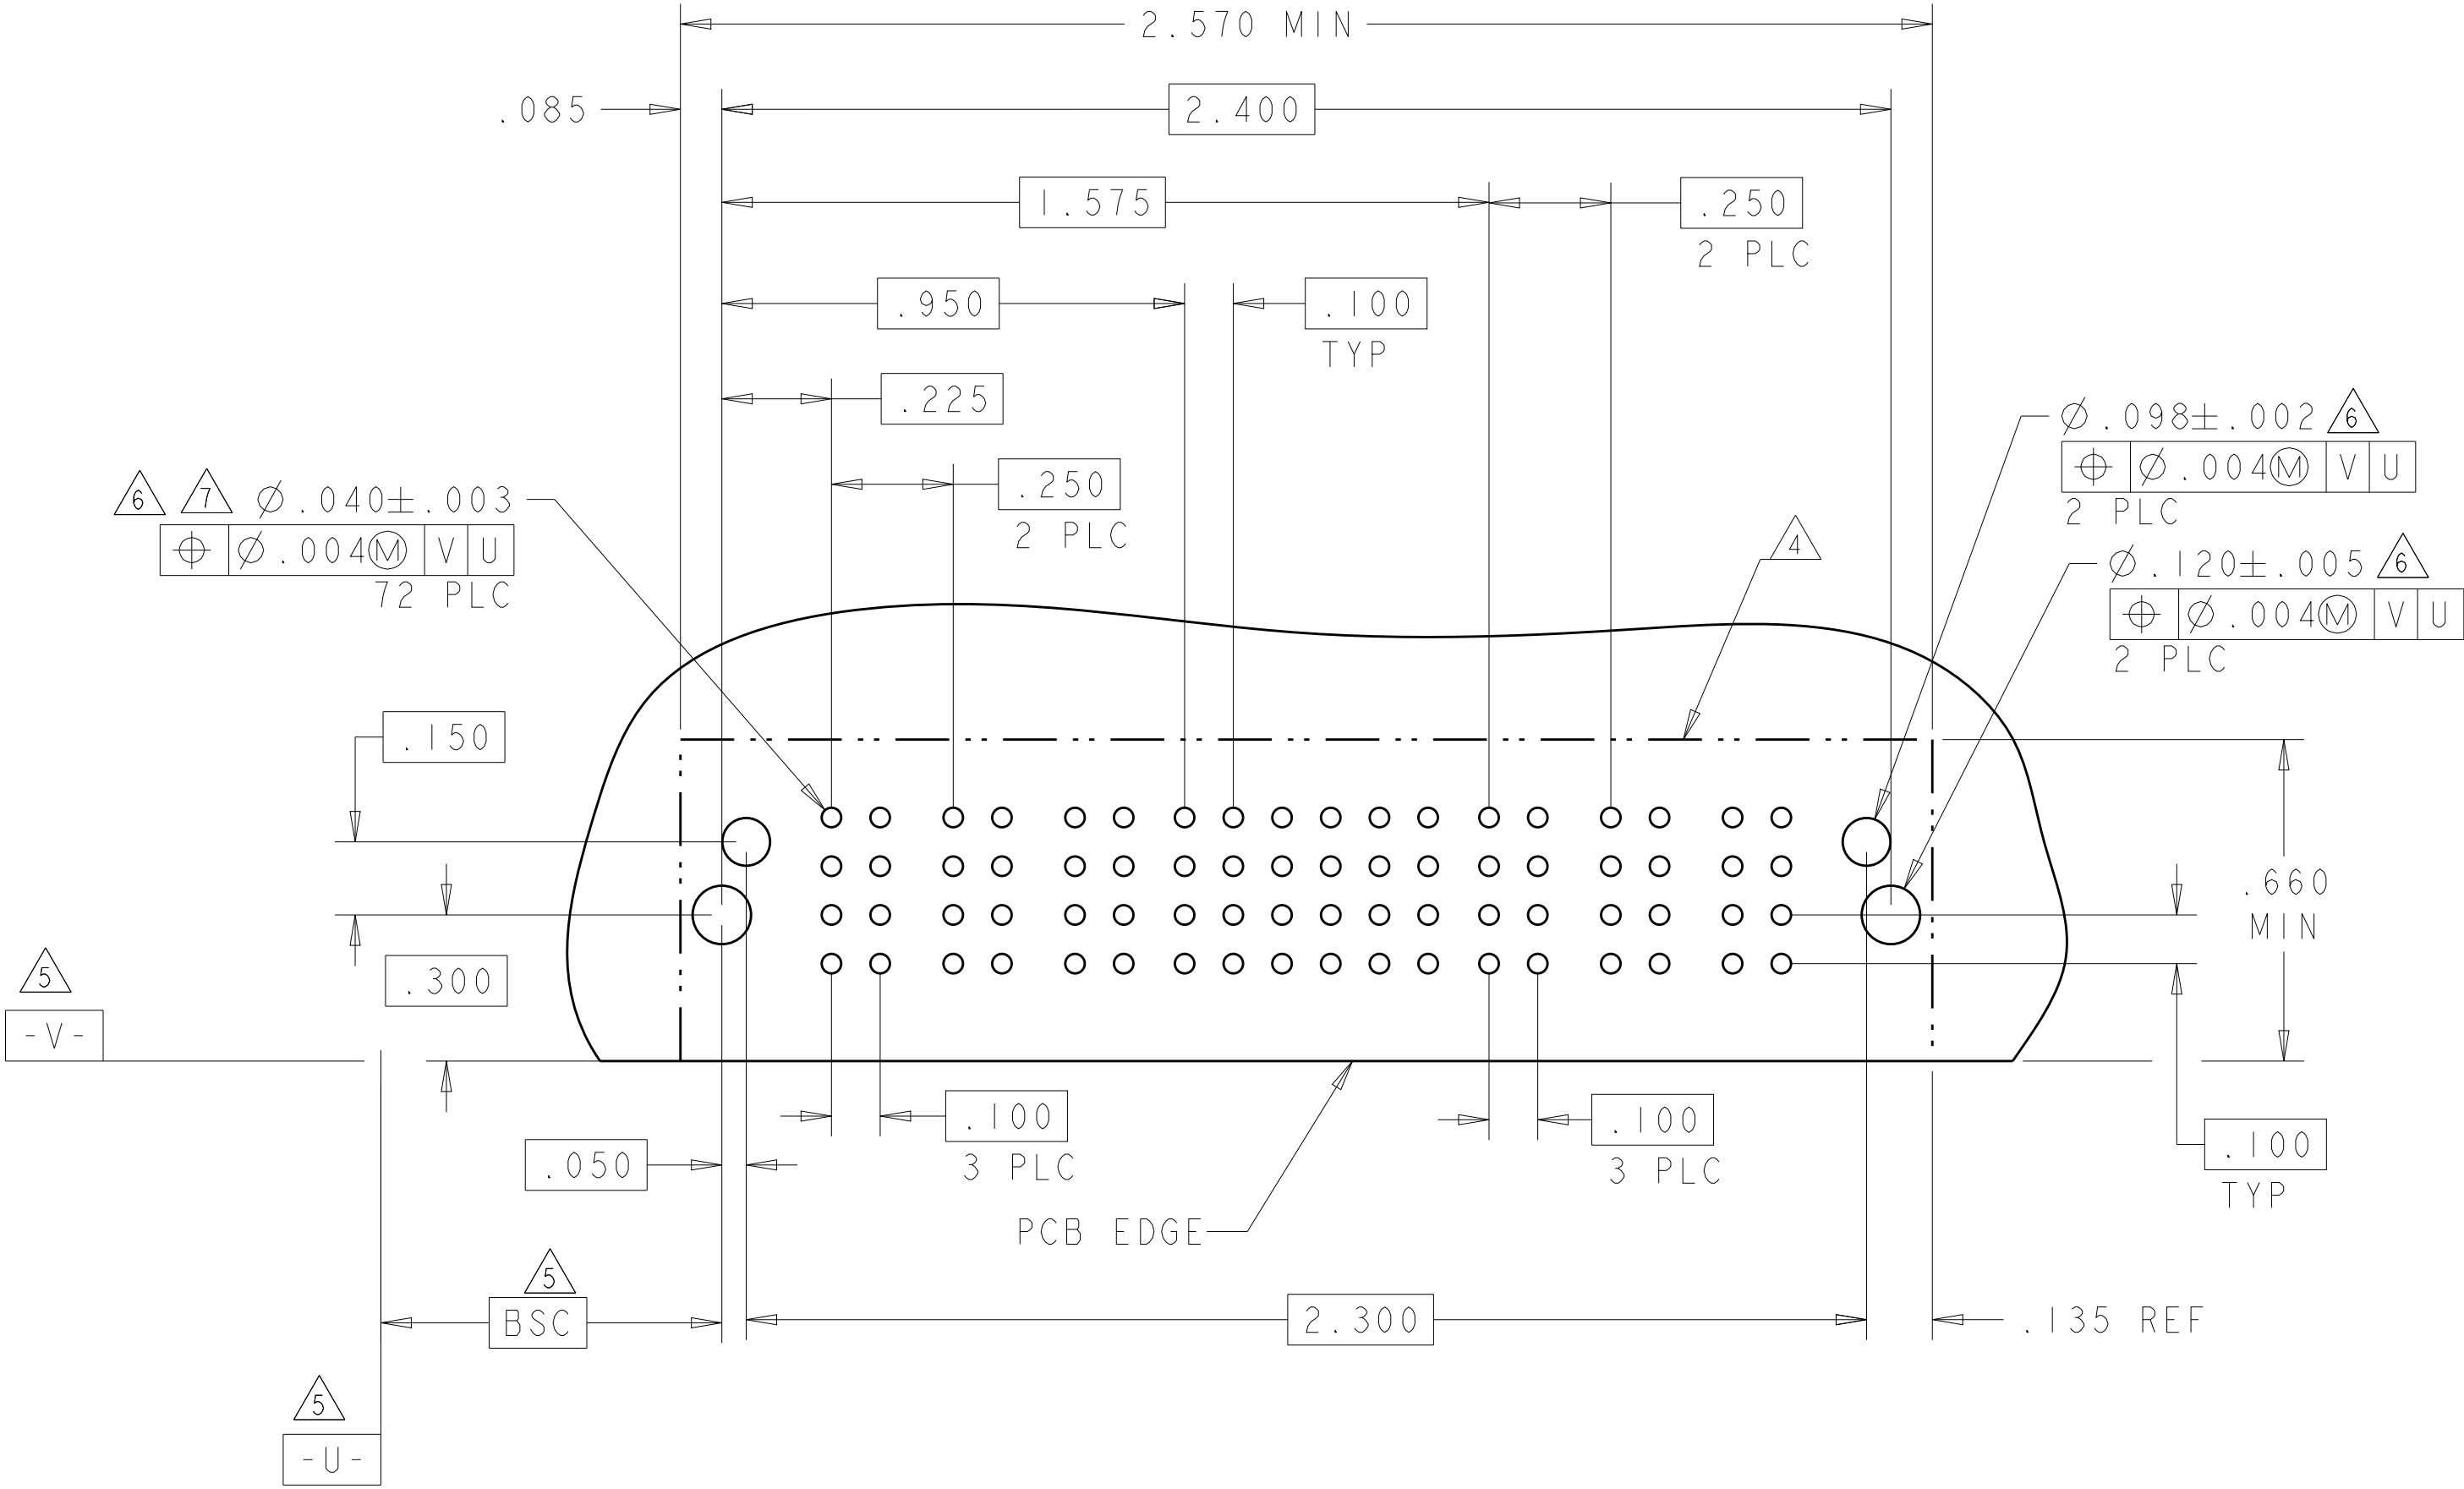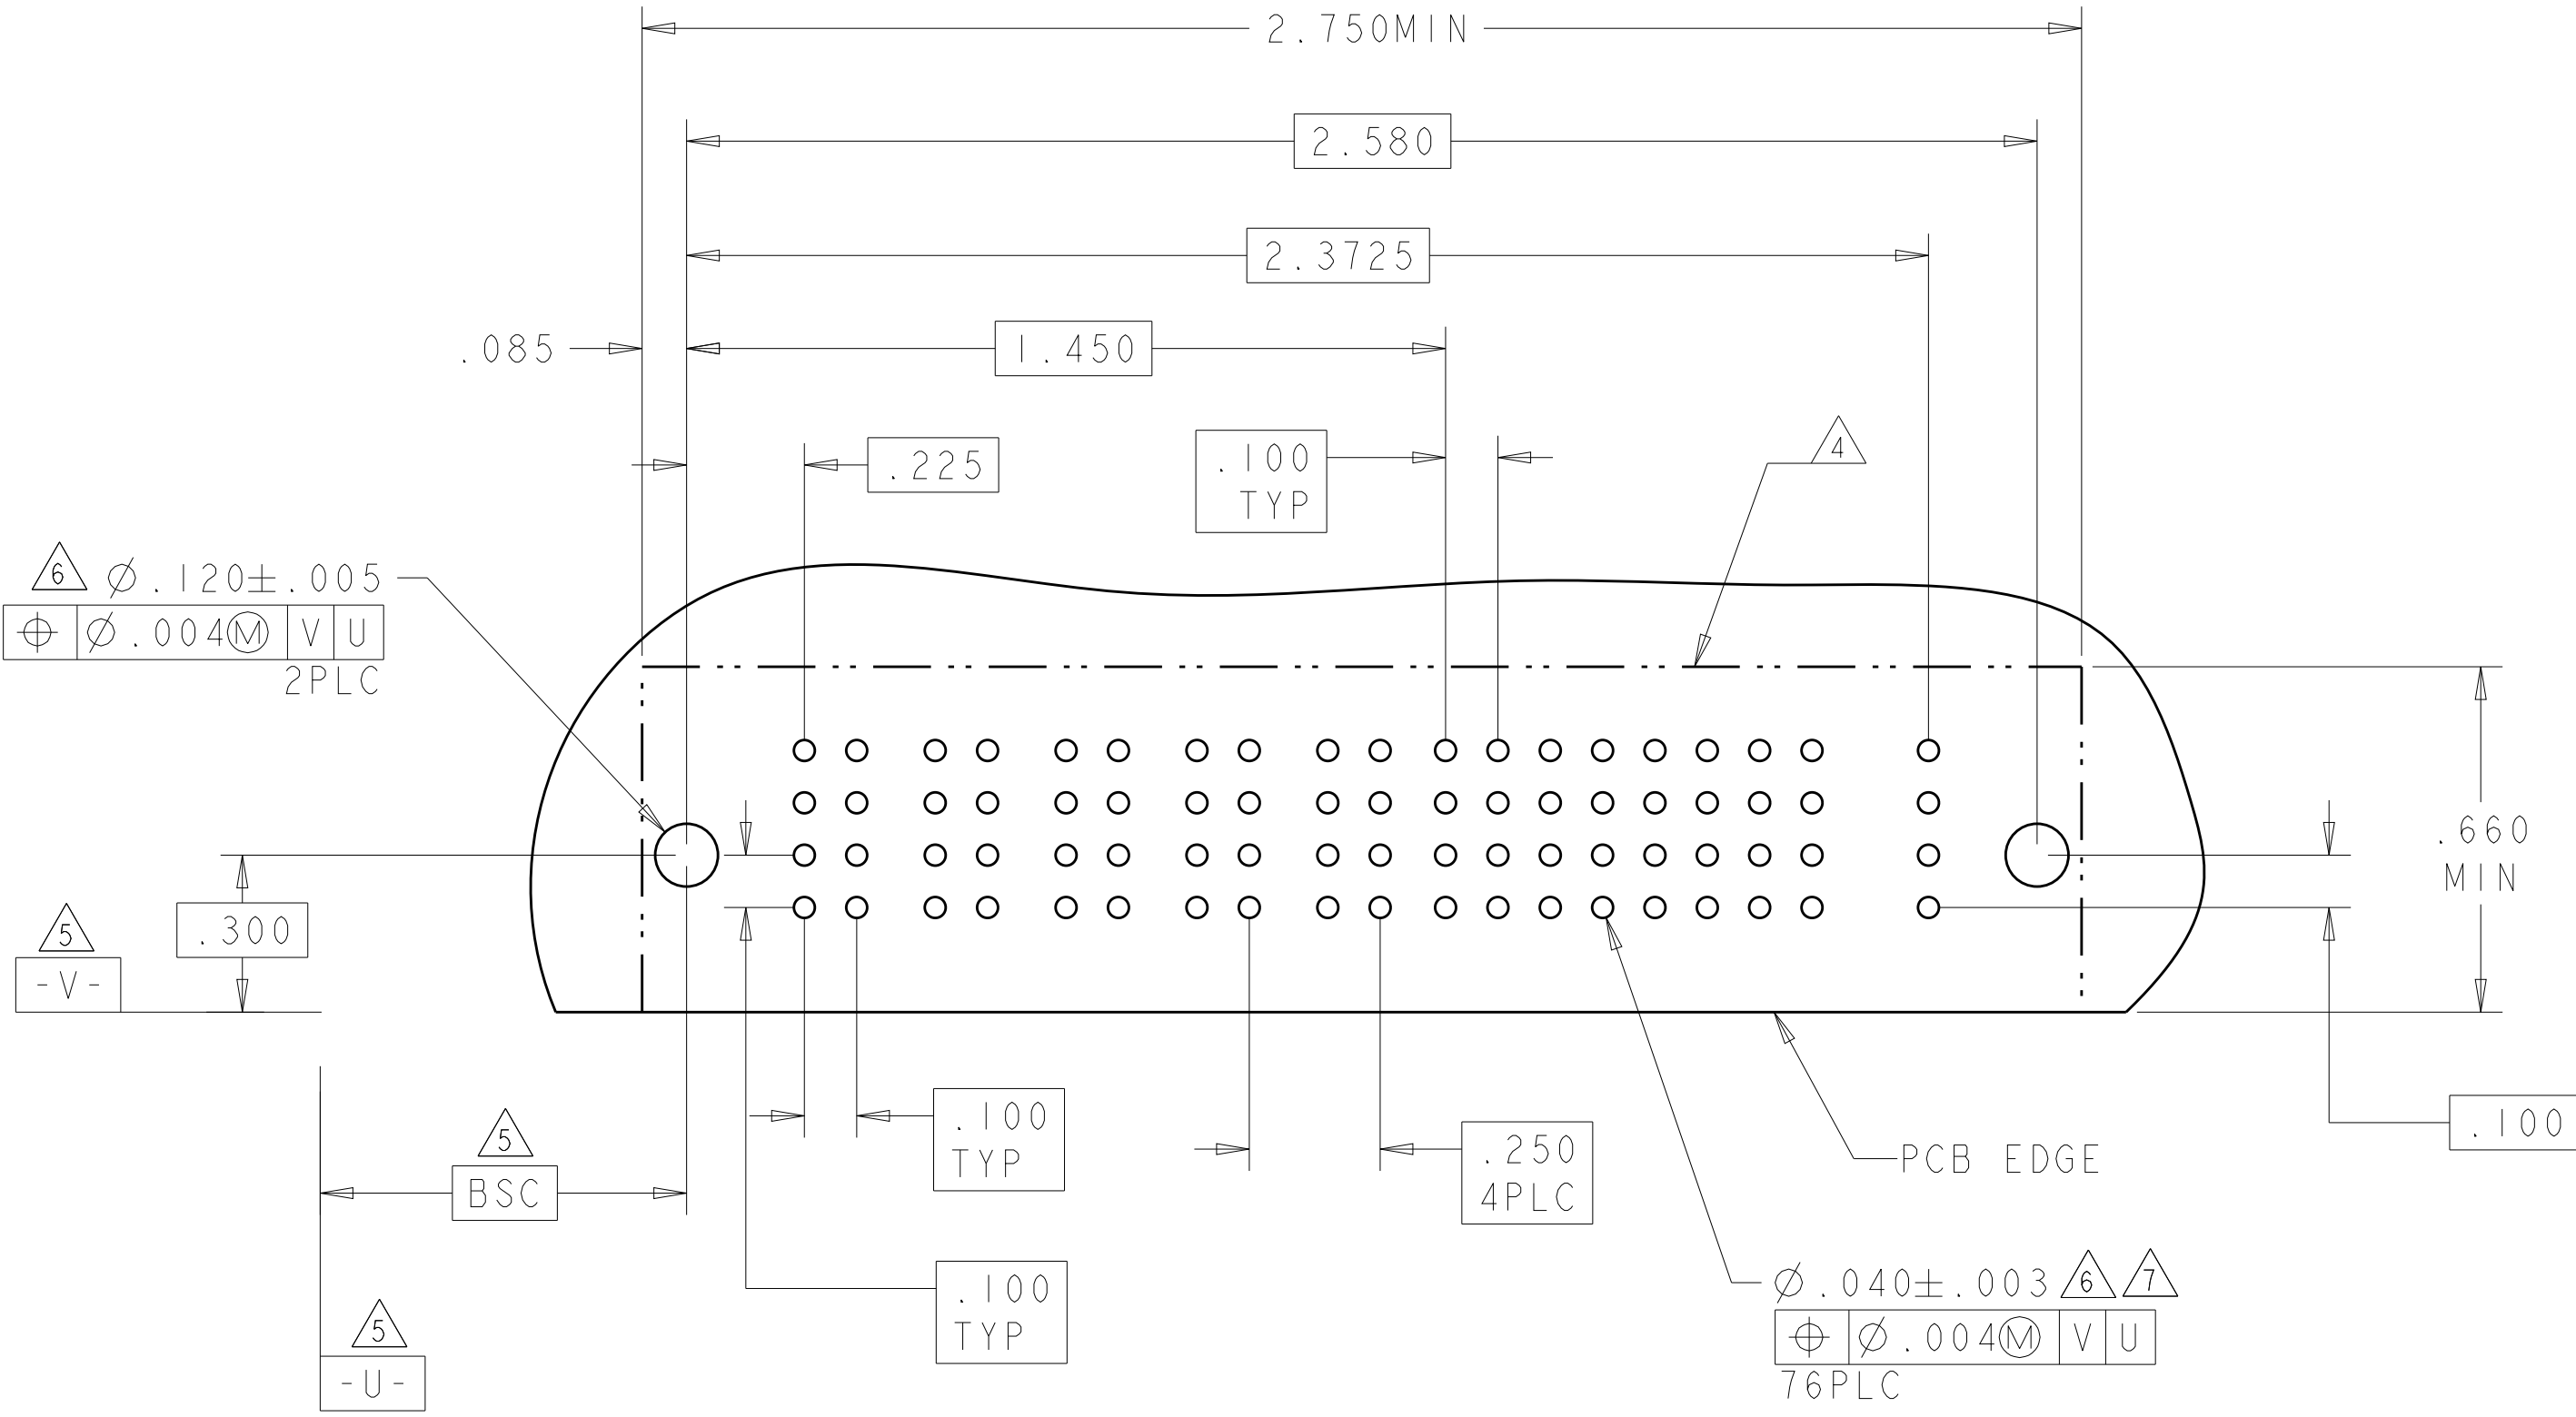


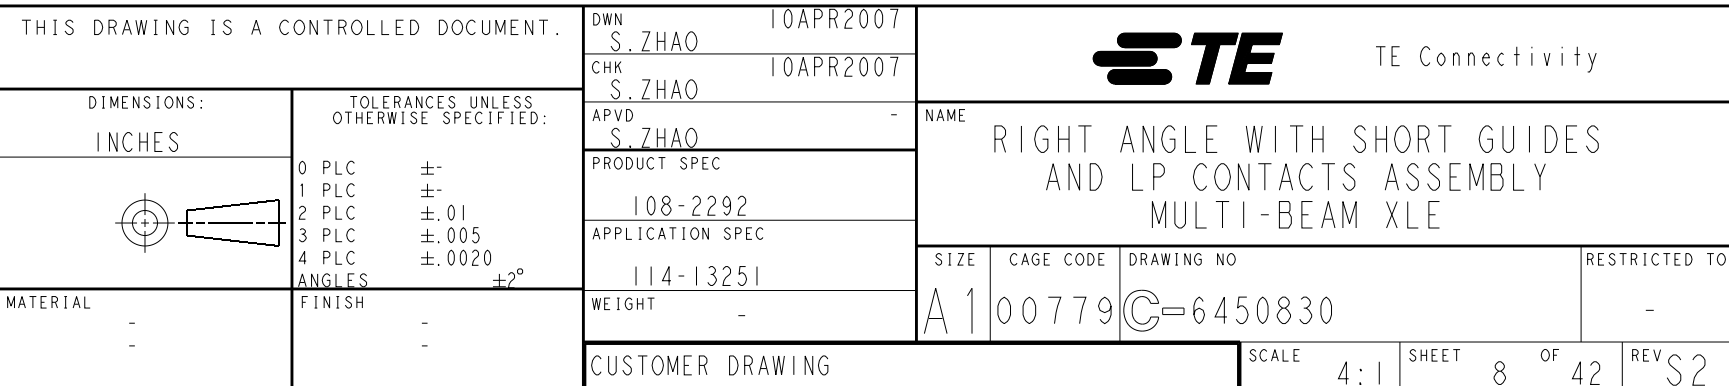-NO CONTACTS LOADED

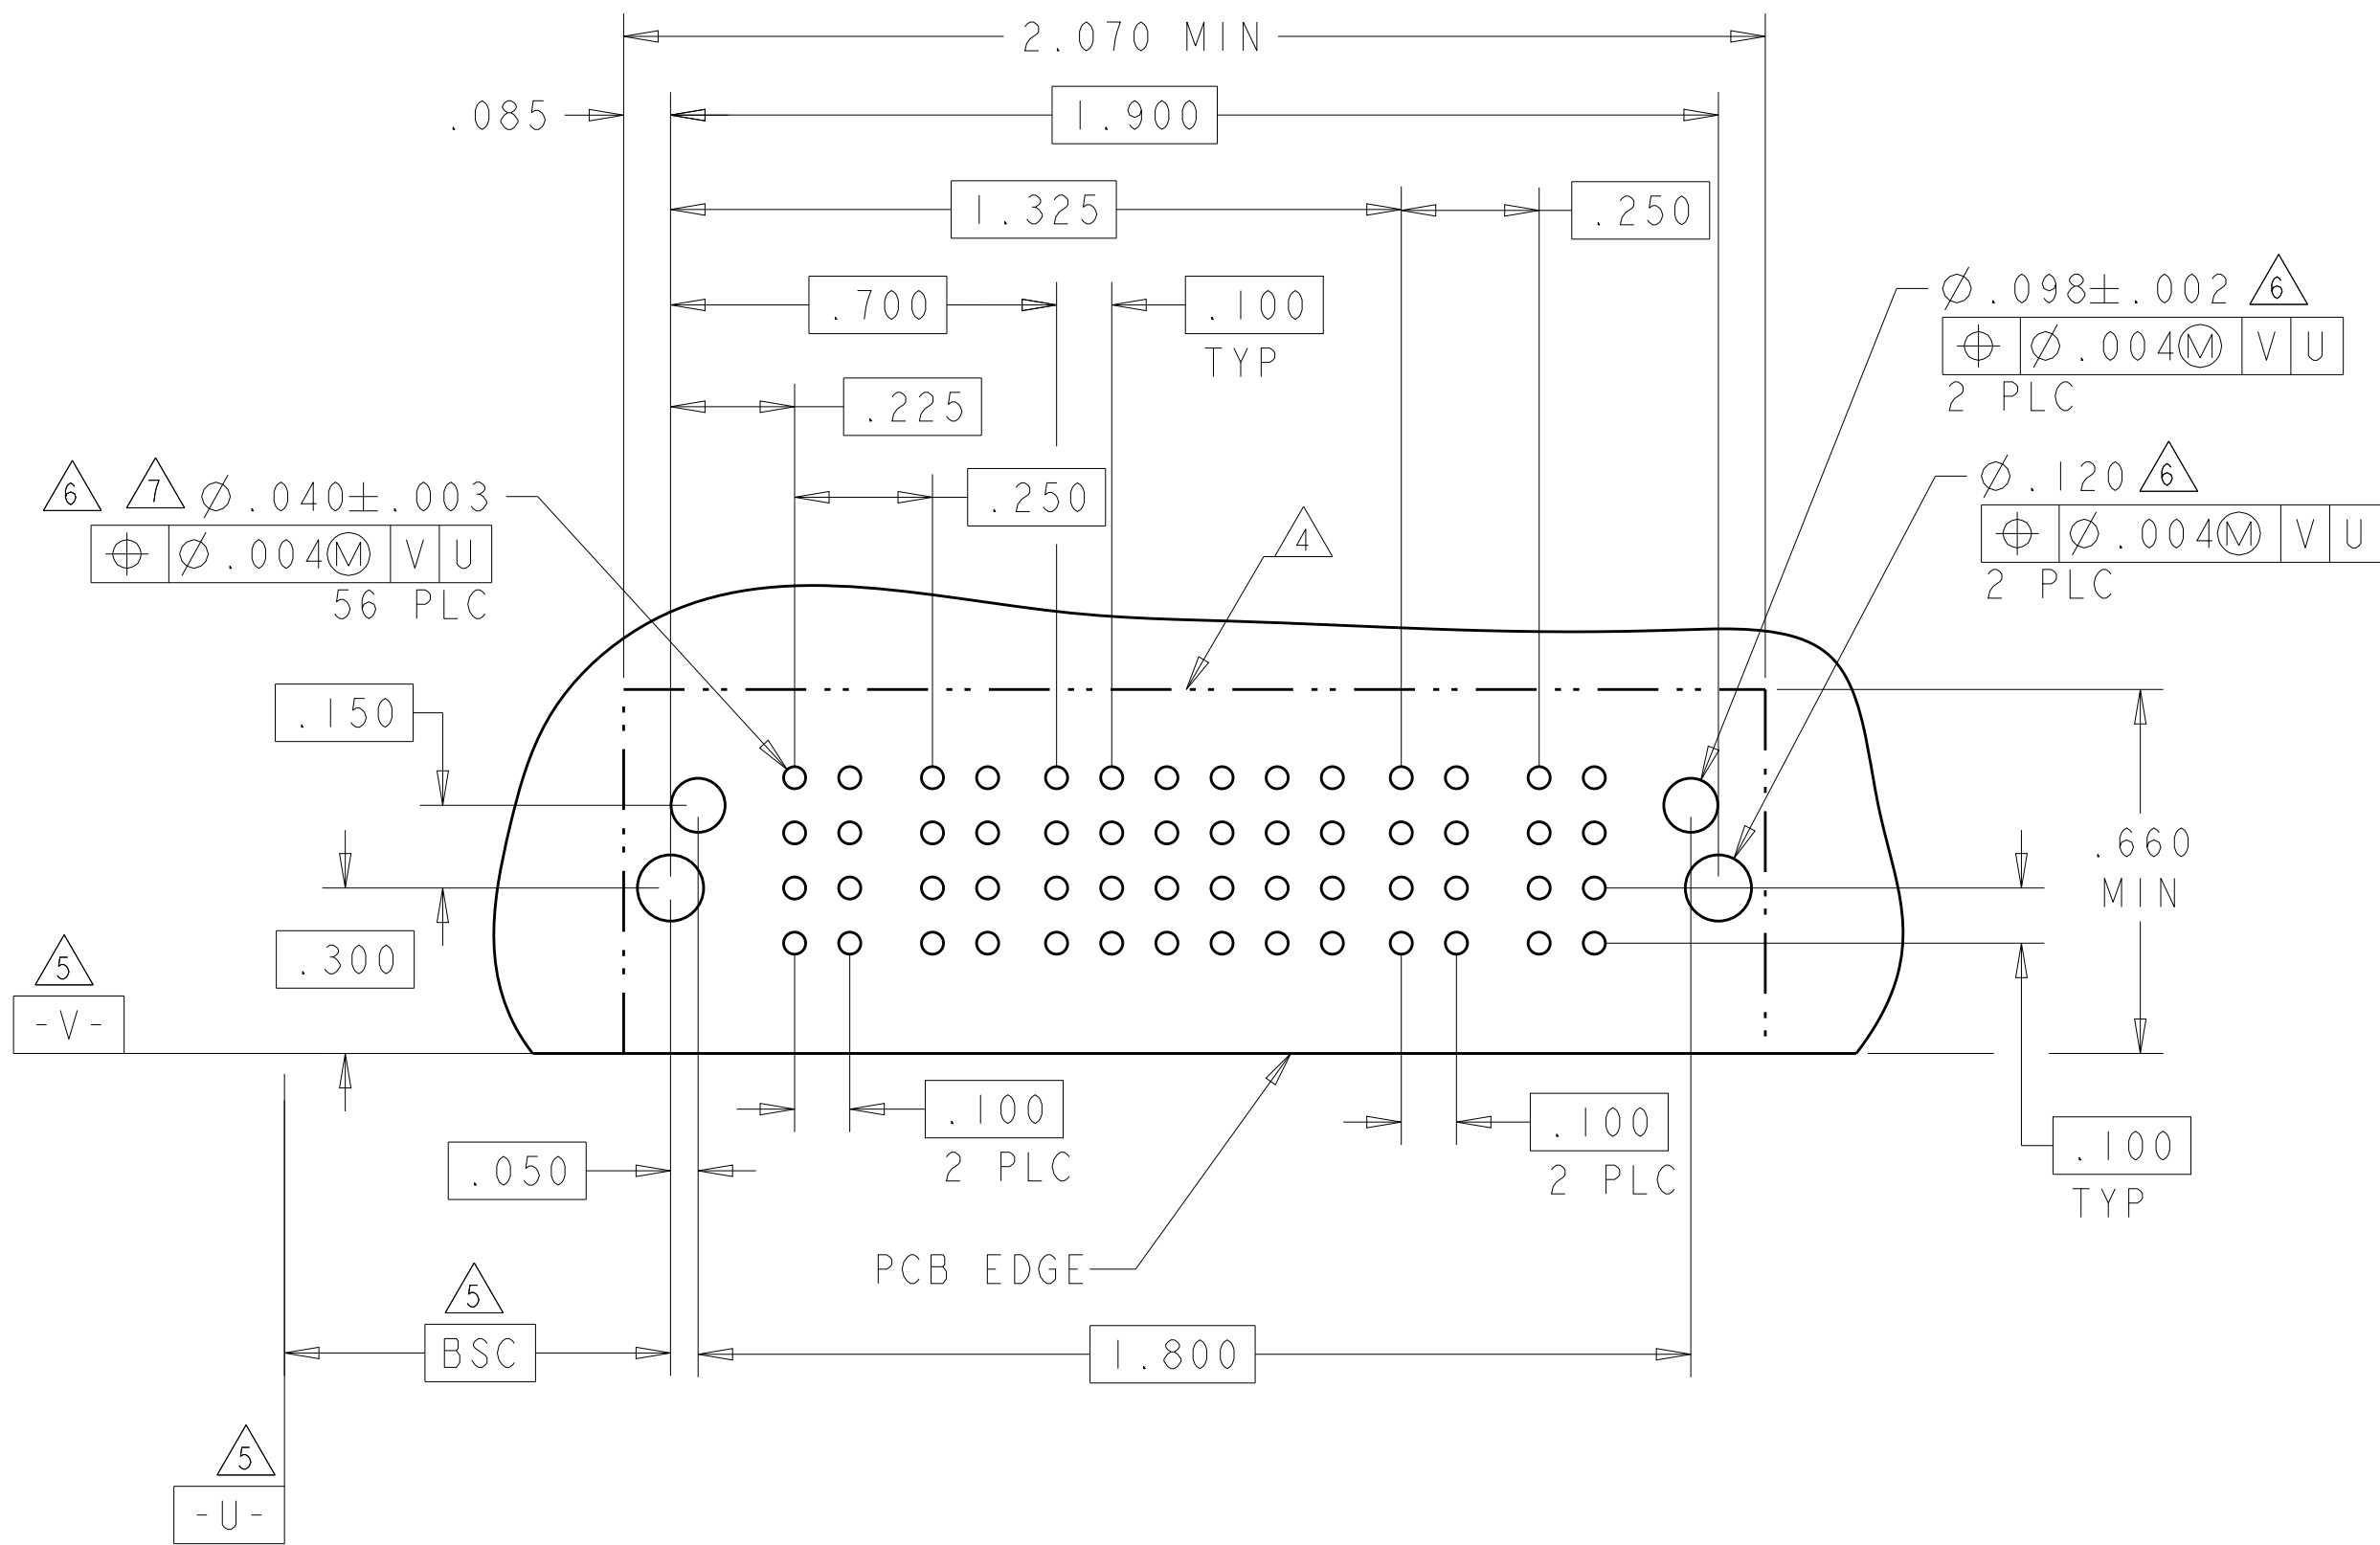[illegible]


PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
1-6450830-5	D		TM	TM	TM	TM	J	J	J	J	J			TM	TM		
	K						K	K	K	K							
	N						N	N	N	N							
	S						S	S	S	S							
4P + 28S + 3ACP																	

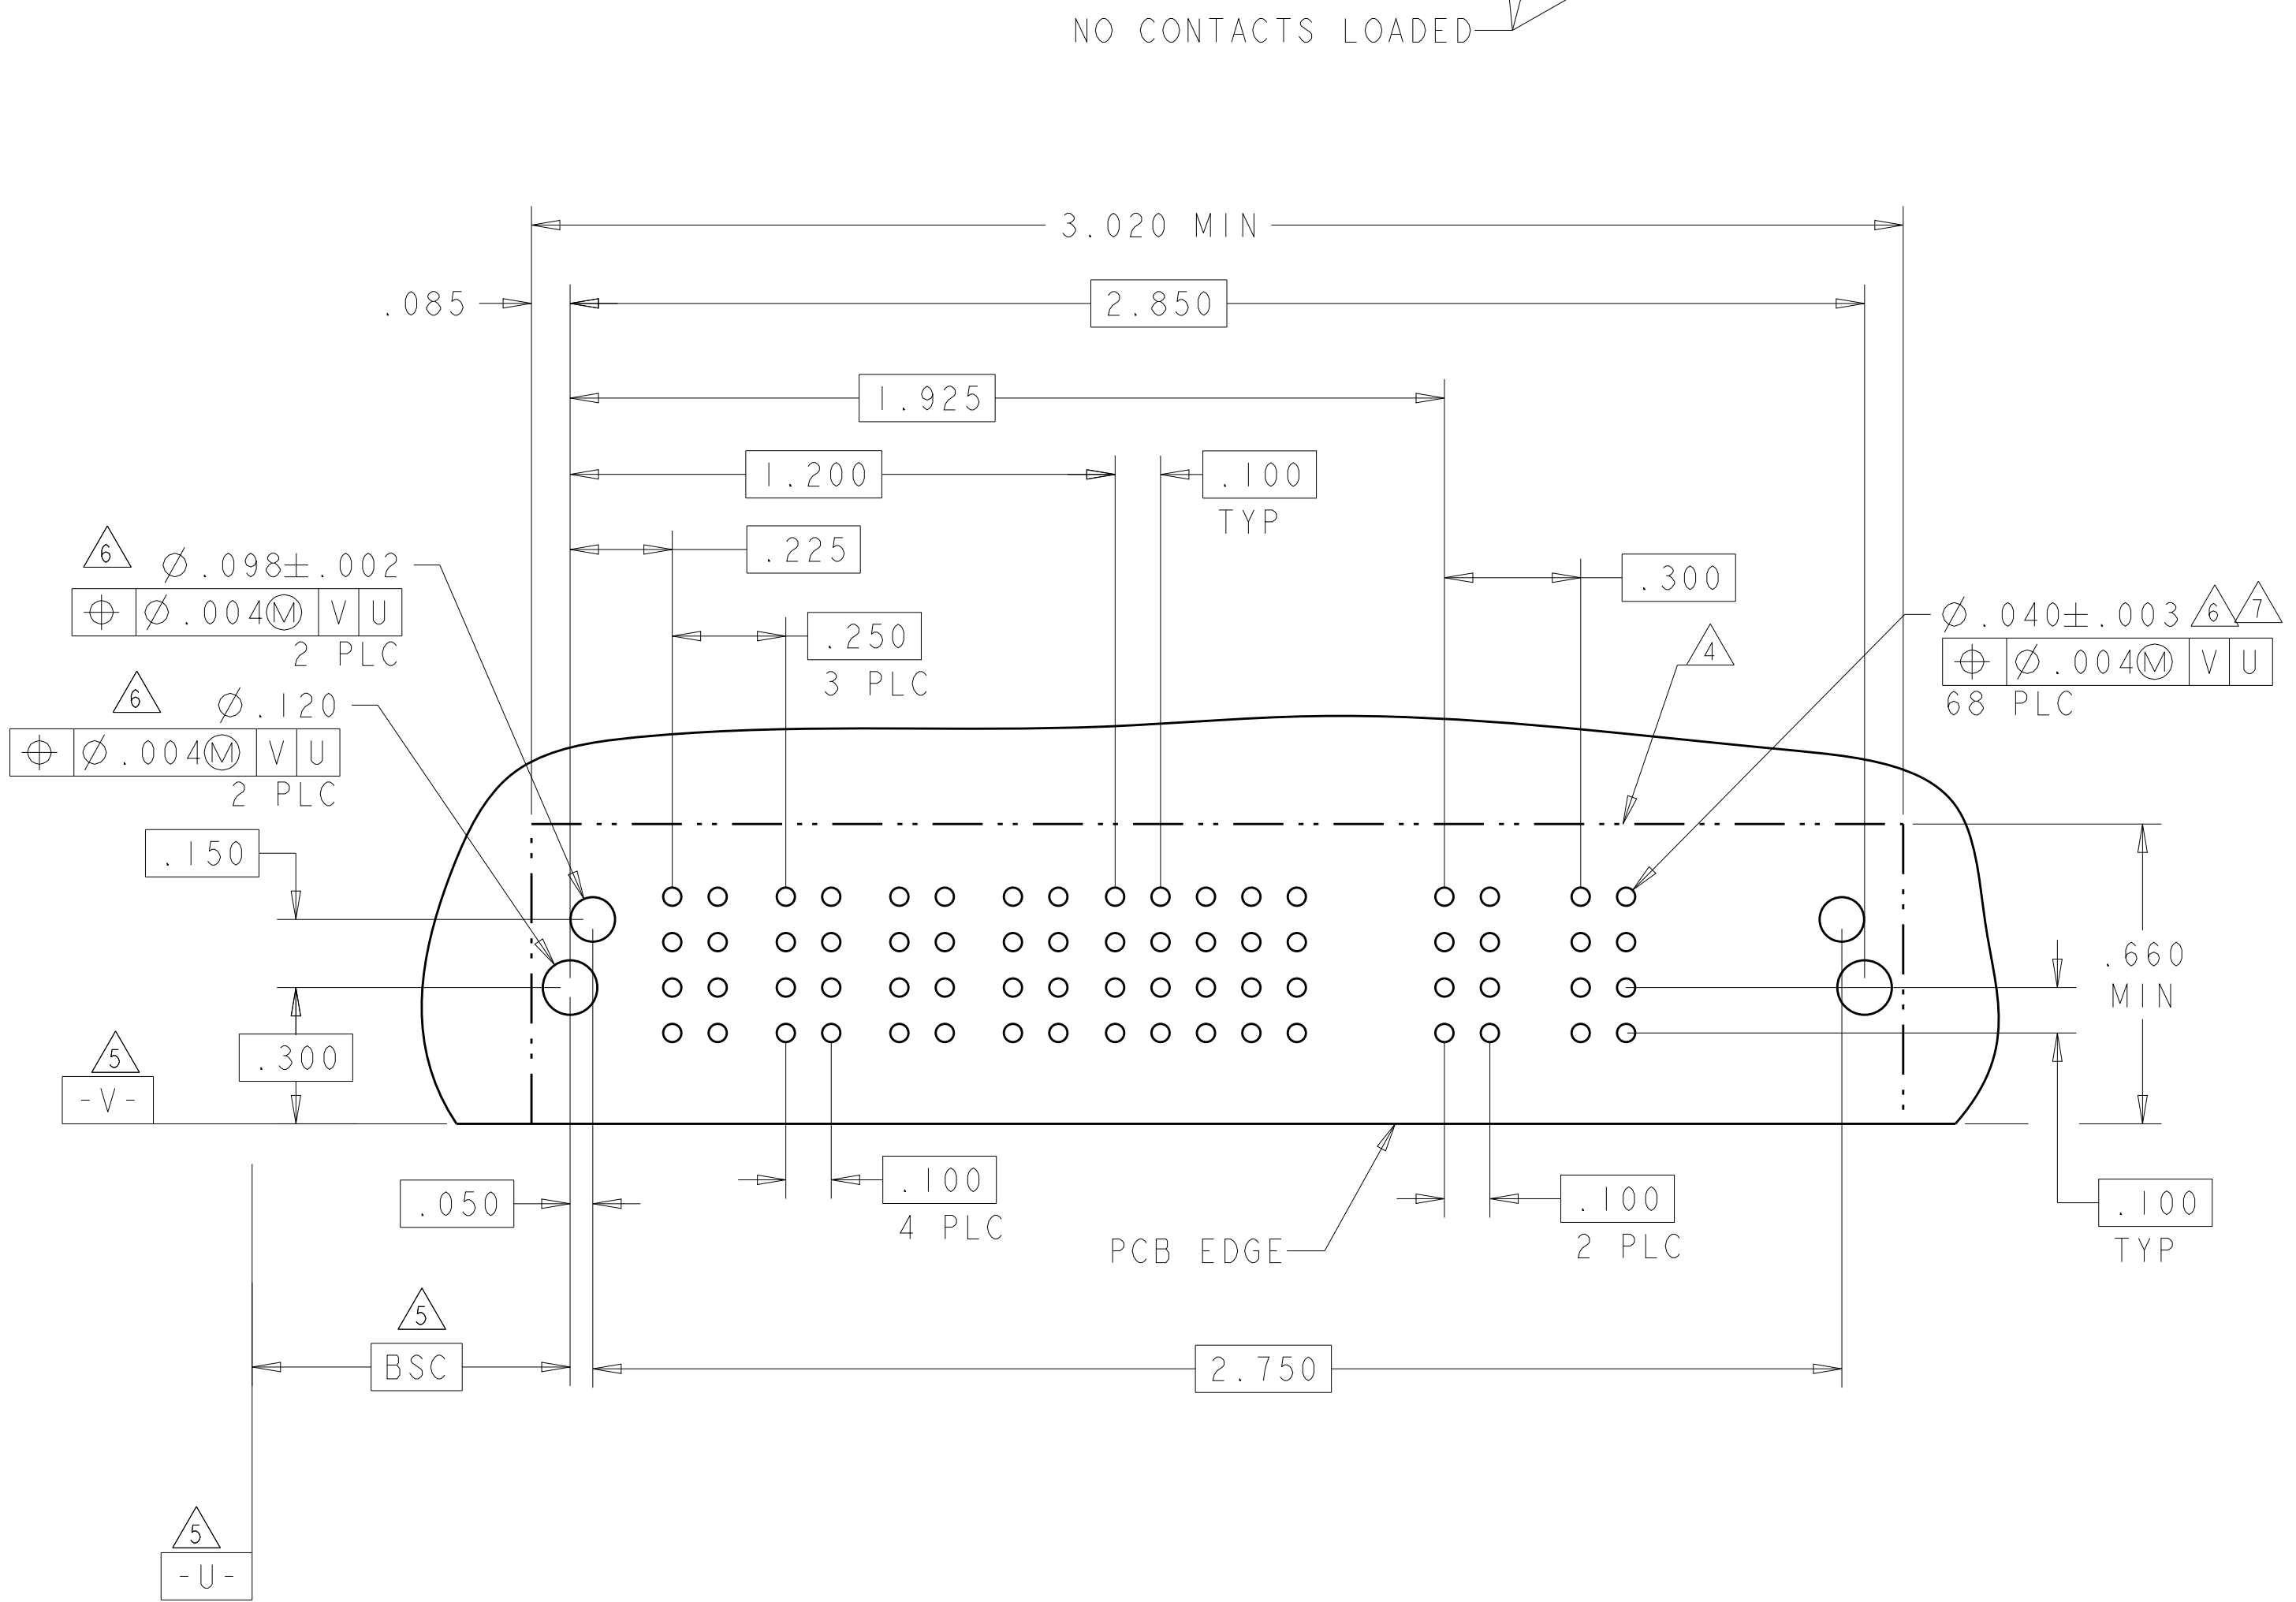4805 (3/11)




Technical drawing of a PCB layout showing dimensions and tolerances. The drawing includes a top view of the PCB with a curved front edge and a dashed line indicating the center. Key dimensions and tolerances are specified:

- Overall width: 4.395 MIN
- Overall length: 4.125
- Distance from left edge to first hole: .225
- Distance between hole groups: 1.300, 1.525, 3.075, 3.700, 4.225
- Hole diameters and tolerances:
 - $\phi .040 \pm .003$ (6, 7, 1) 88 PLC
 - $\phi .098 \pm .002$ (6) 2 PLC (OPTION FOR HOLD DOWN)
 - $\phi .120$ (6) 2 PLC
- Other dimensions: .085, .100 (3 PLC), .100 (5 PLC), .200, .325 (2 PLC), .500
- Labels: PCB EDGE, BSC




LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL															
			P1	LP1	LP2	1	2	3	4	5	6	7	8	9	10	11	12	LP3	LP4	P2	
1-6450830-7	D		TM	LML	LML	E	E	E	E	E	E	E	E	E	E	E	LML	LMF	TM		
	F					F	F	F	F	F	F	F	F	F	F						
	G					G	G	G	G	G	G	G	G	G	G	G					
	H					H	H	H	H	H	H	H	H	H	H	H					
IP + 2LP + 48S + 2LP + IP																					

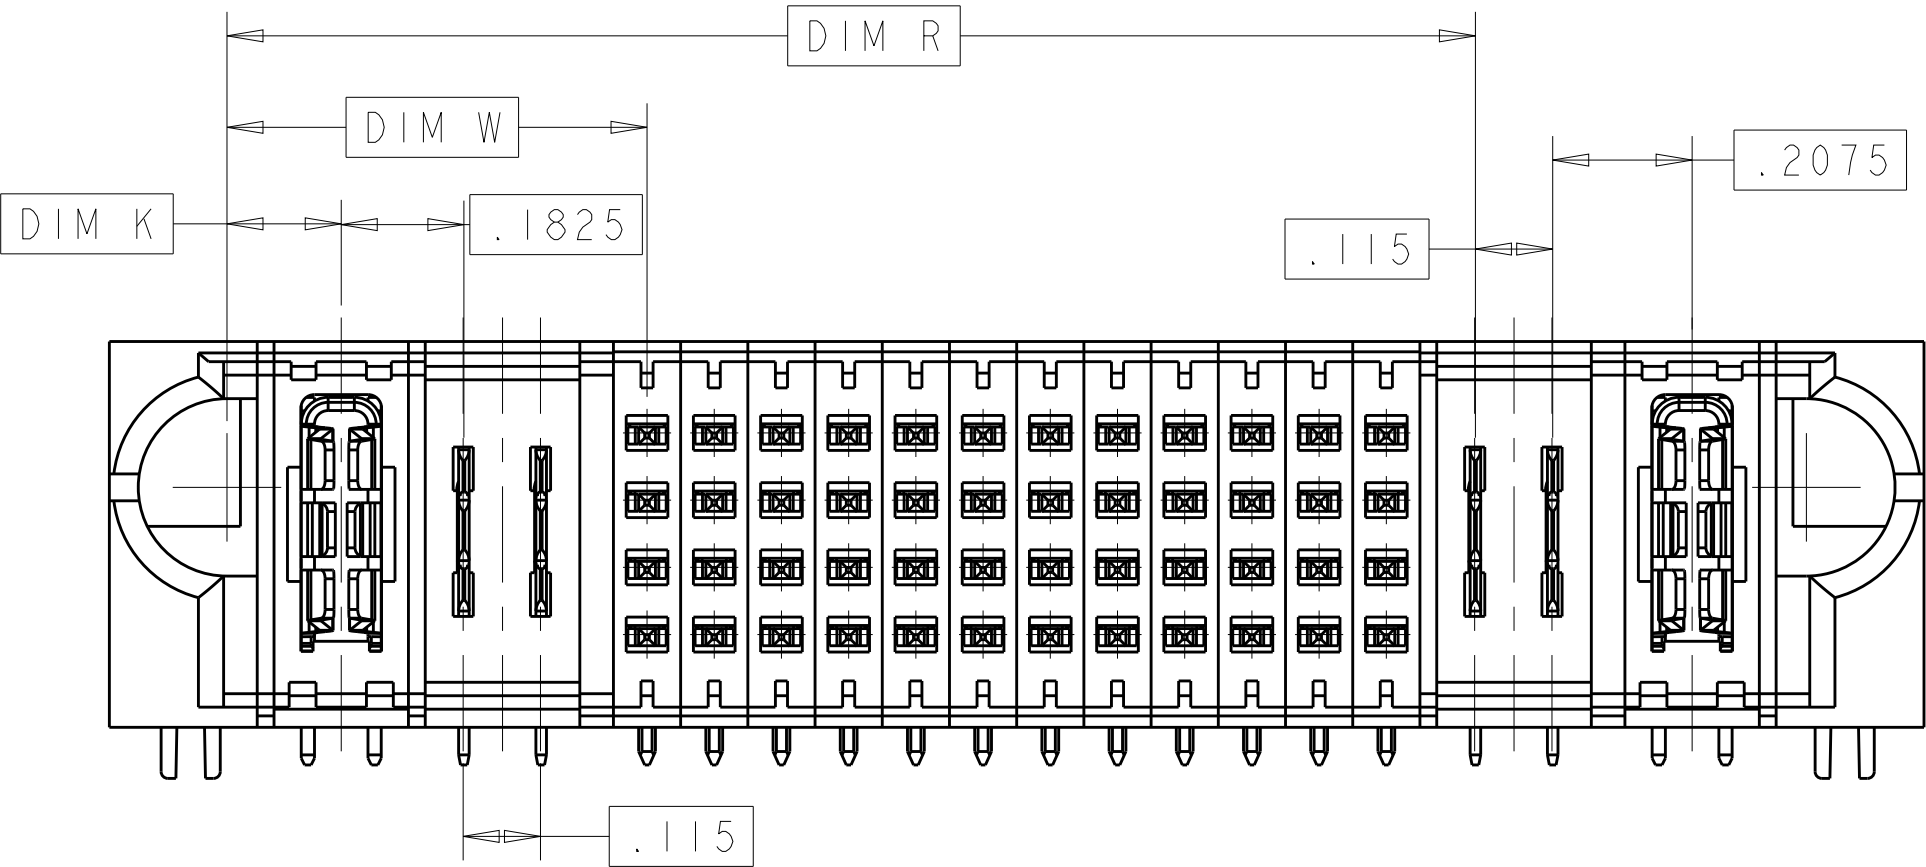

P/N:1-6450830-7 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

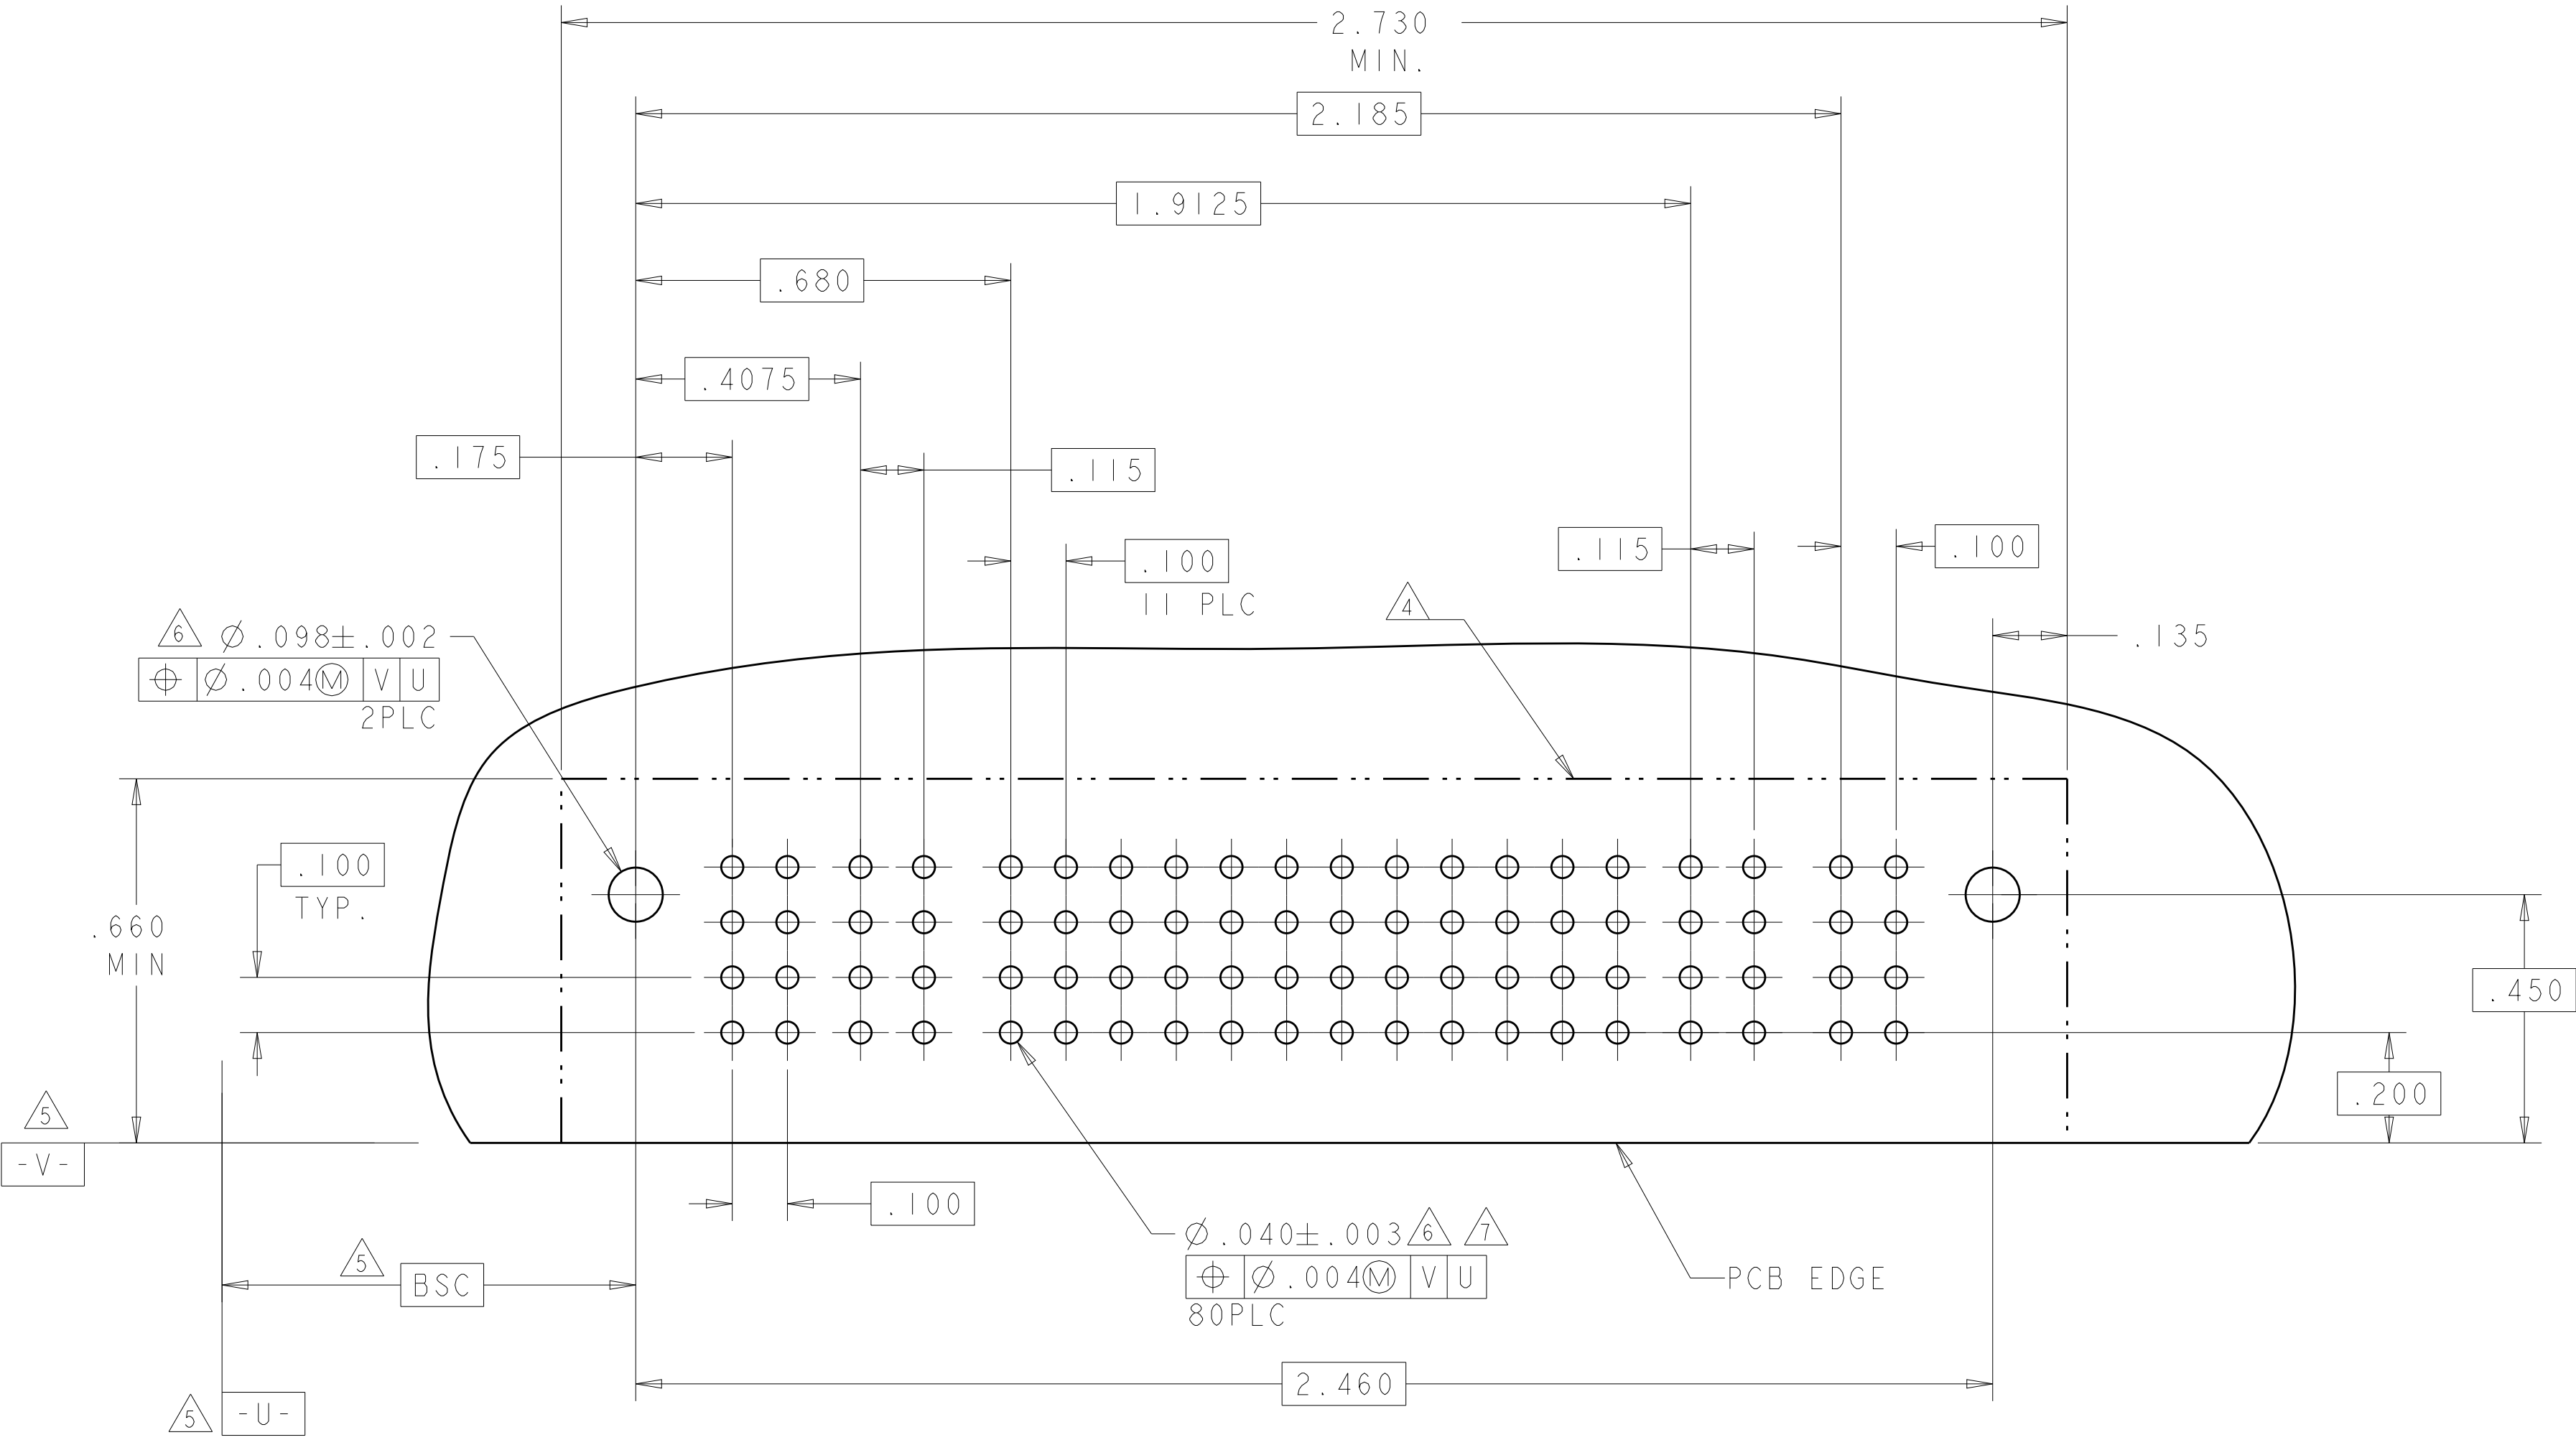

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO

CHK
S.ZHAO

APVD
S.ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC

APPLICATION SPEC

114-13251

WEIGHT

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450830

RESTRICTED TO
-

SCALE
4:1

SHEET
12








OF
42

REV
S2


TE Connectivity

TE

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL							POWER			
			P1	P2	P3	P4	1	2	3	4	5	6	7	P5	P6	P7	
I-6450830-9	D C B A	 HD	 TM	 TM	 TM	 TM	J	J	J	J	J			 TM	 TM	 TM	 HD
							K	K	K	K	K						
							N	N	N	N	N						
							S	S	S	S	S						
4P + 28S + 3ACP																	

NO CONTACTS LOADED

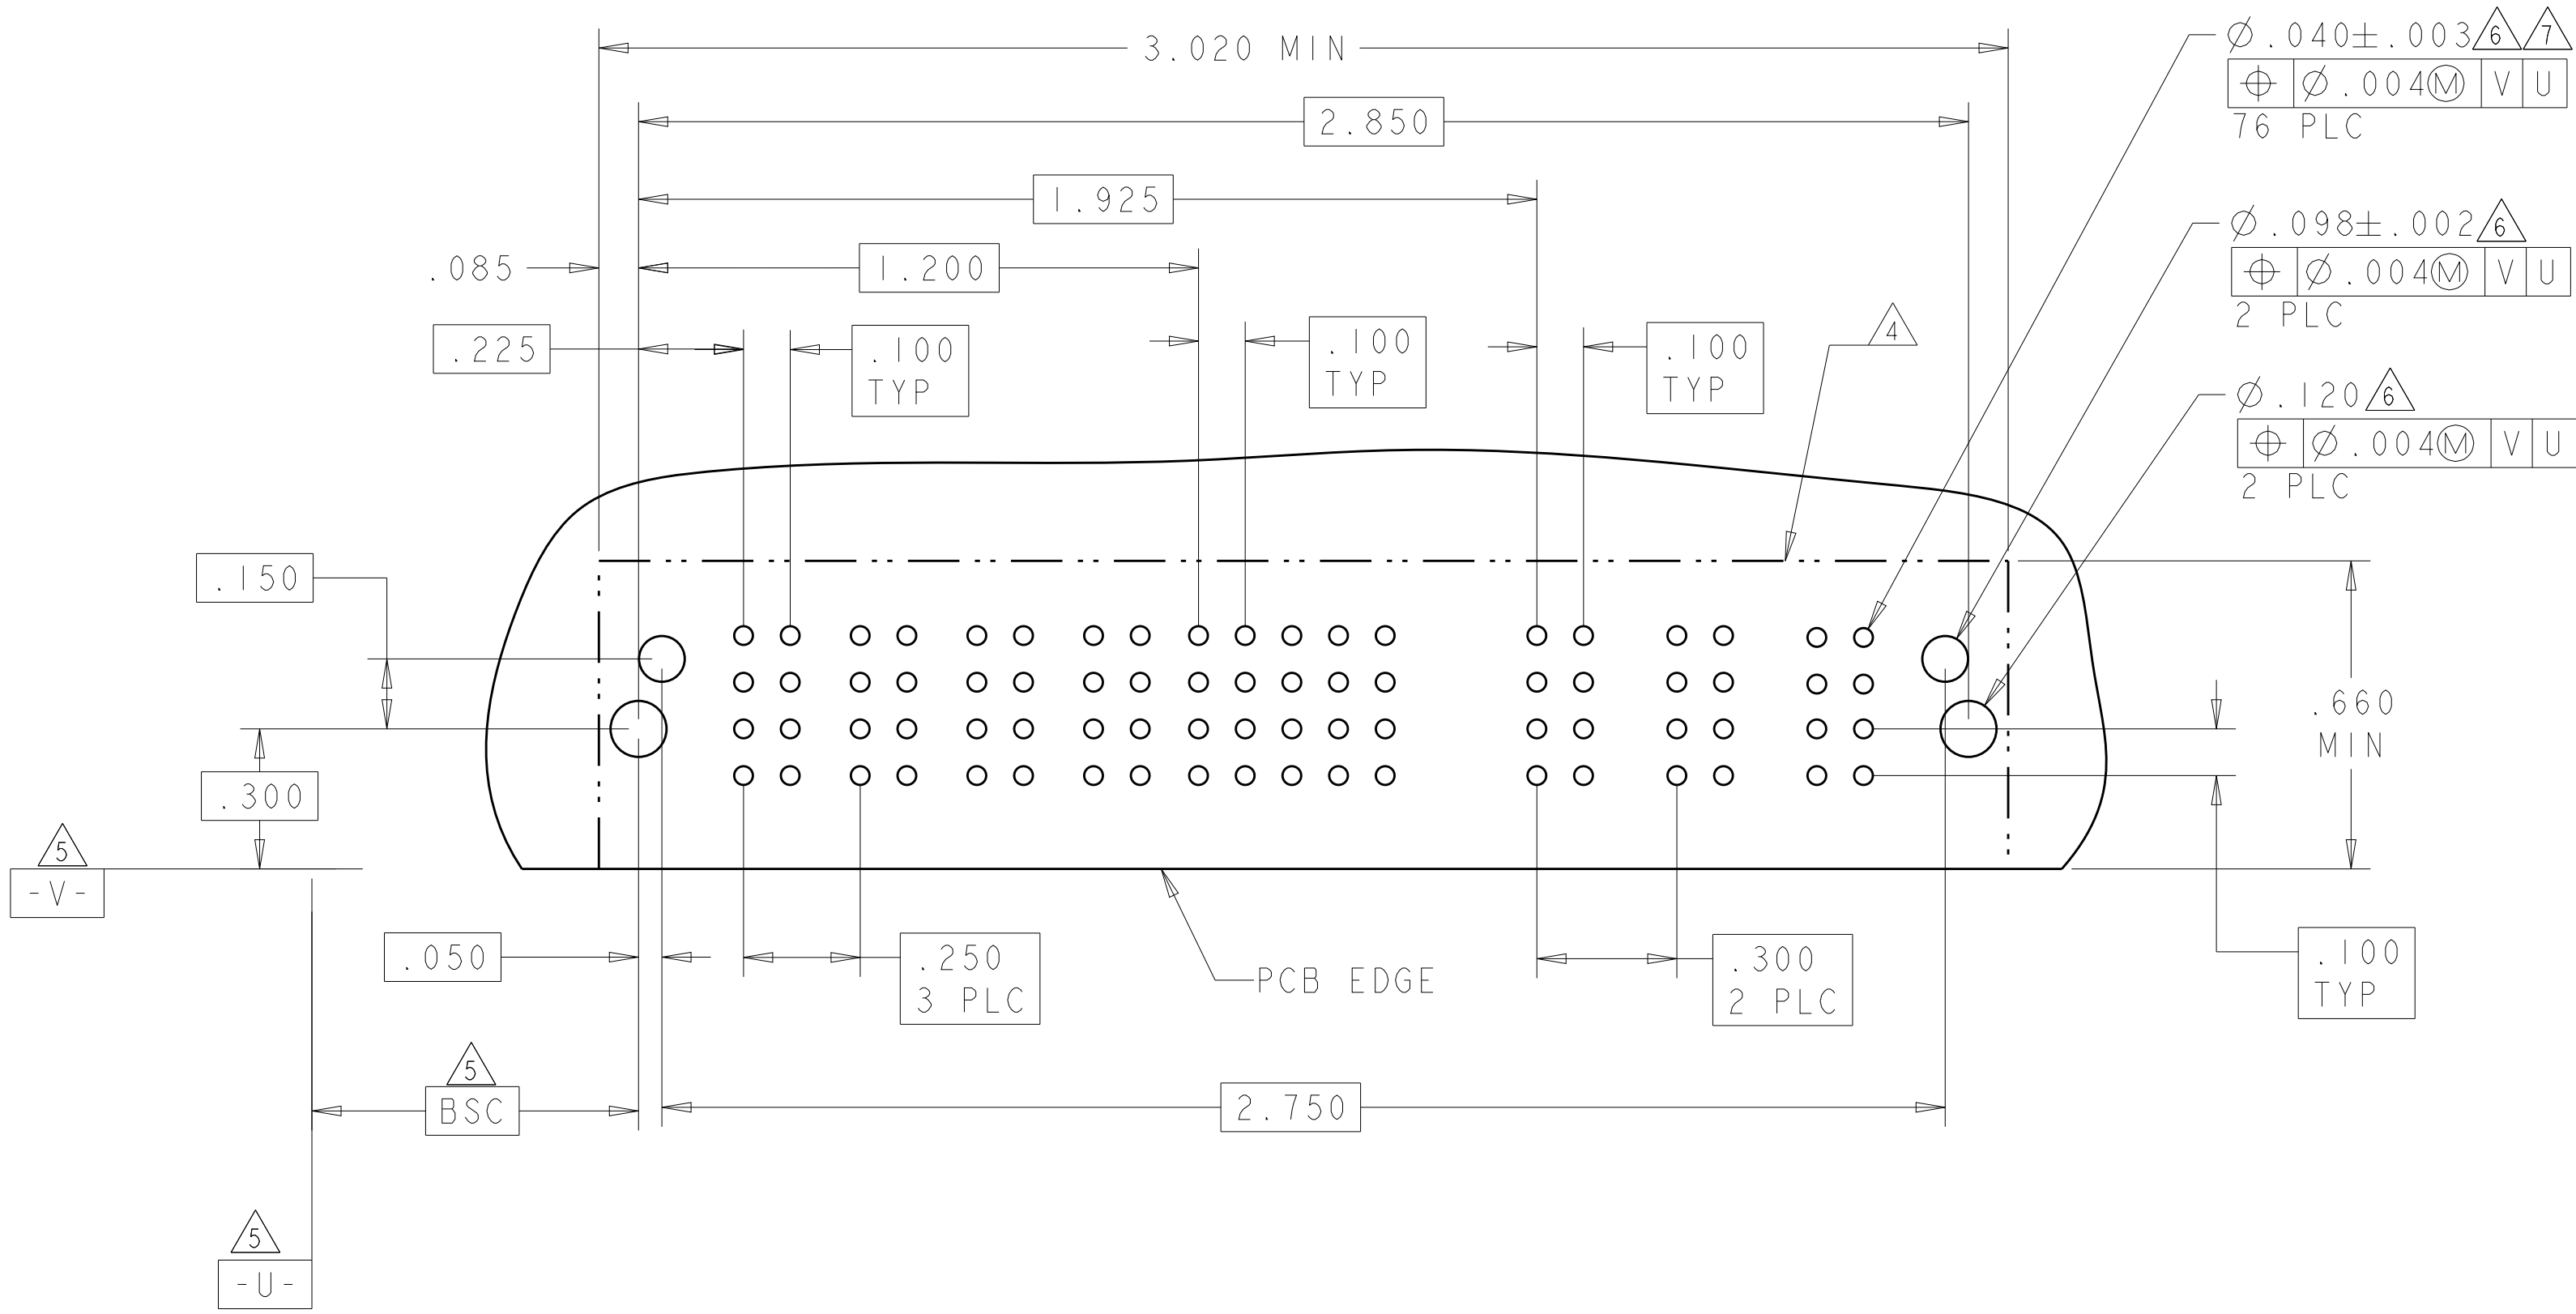

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH -

MATERIAL

-

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

13

OF


42

REV


S2

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL										POWER		
			P1	P2	1	2	3	4	5	6	7	8	9	10	P3	P4	
2-6450830-4	D		TM	TM	J	J	J	J	J	J	J	J	J	J	TM	TM	
	C				K	K	K	K	K	K	K	K	K	K			
	B				N	N	N	N	N	N	N	N	N	N			
A	HD				S	S	S	S	S	S	S	S	S	S			HD
2P + 40S + 2P																	

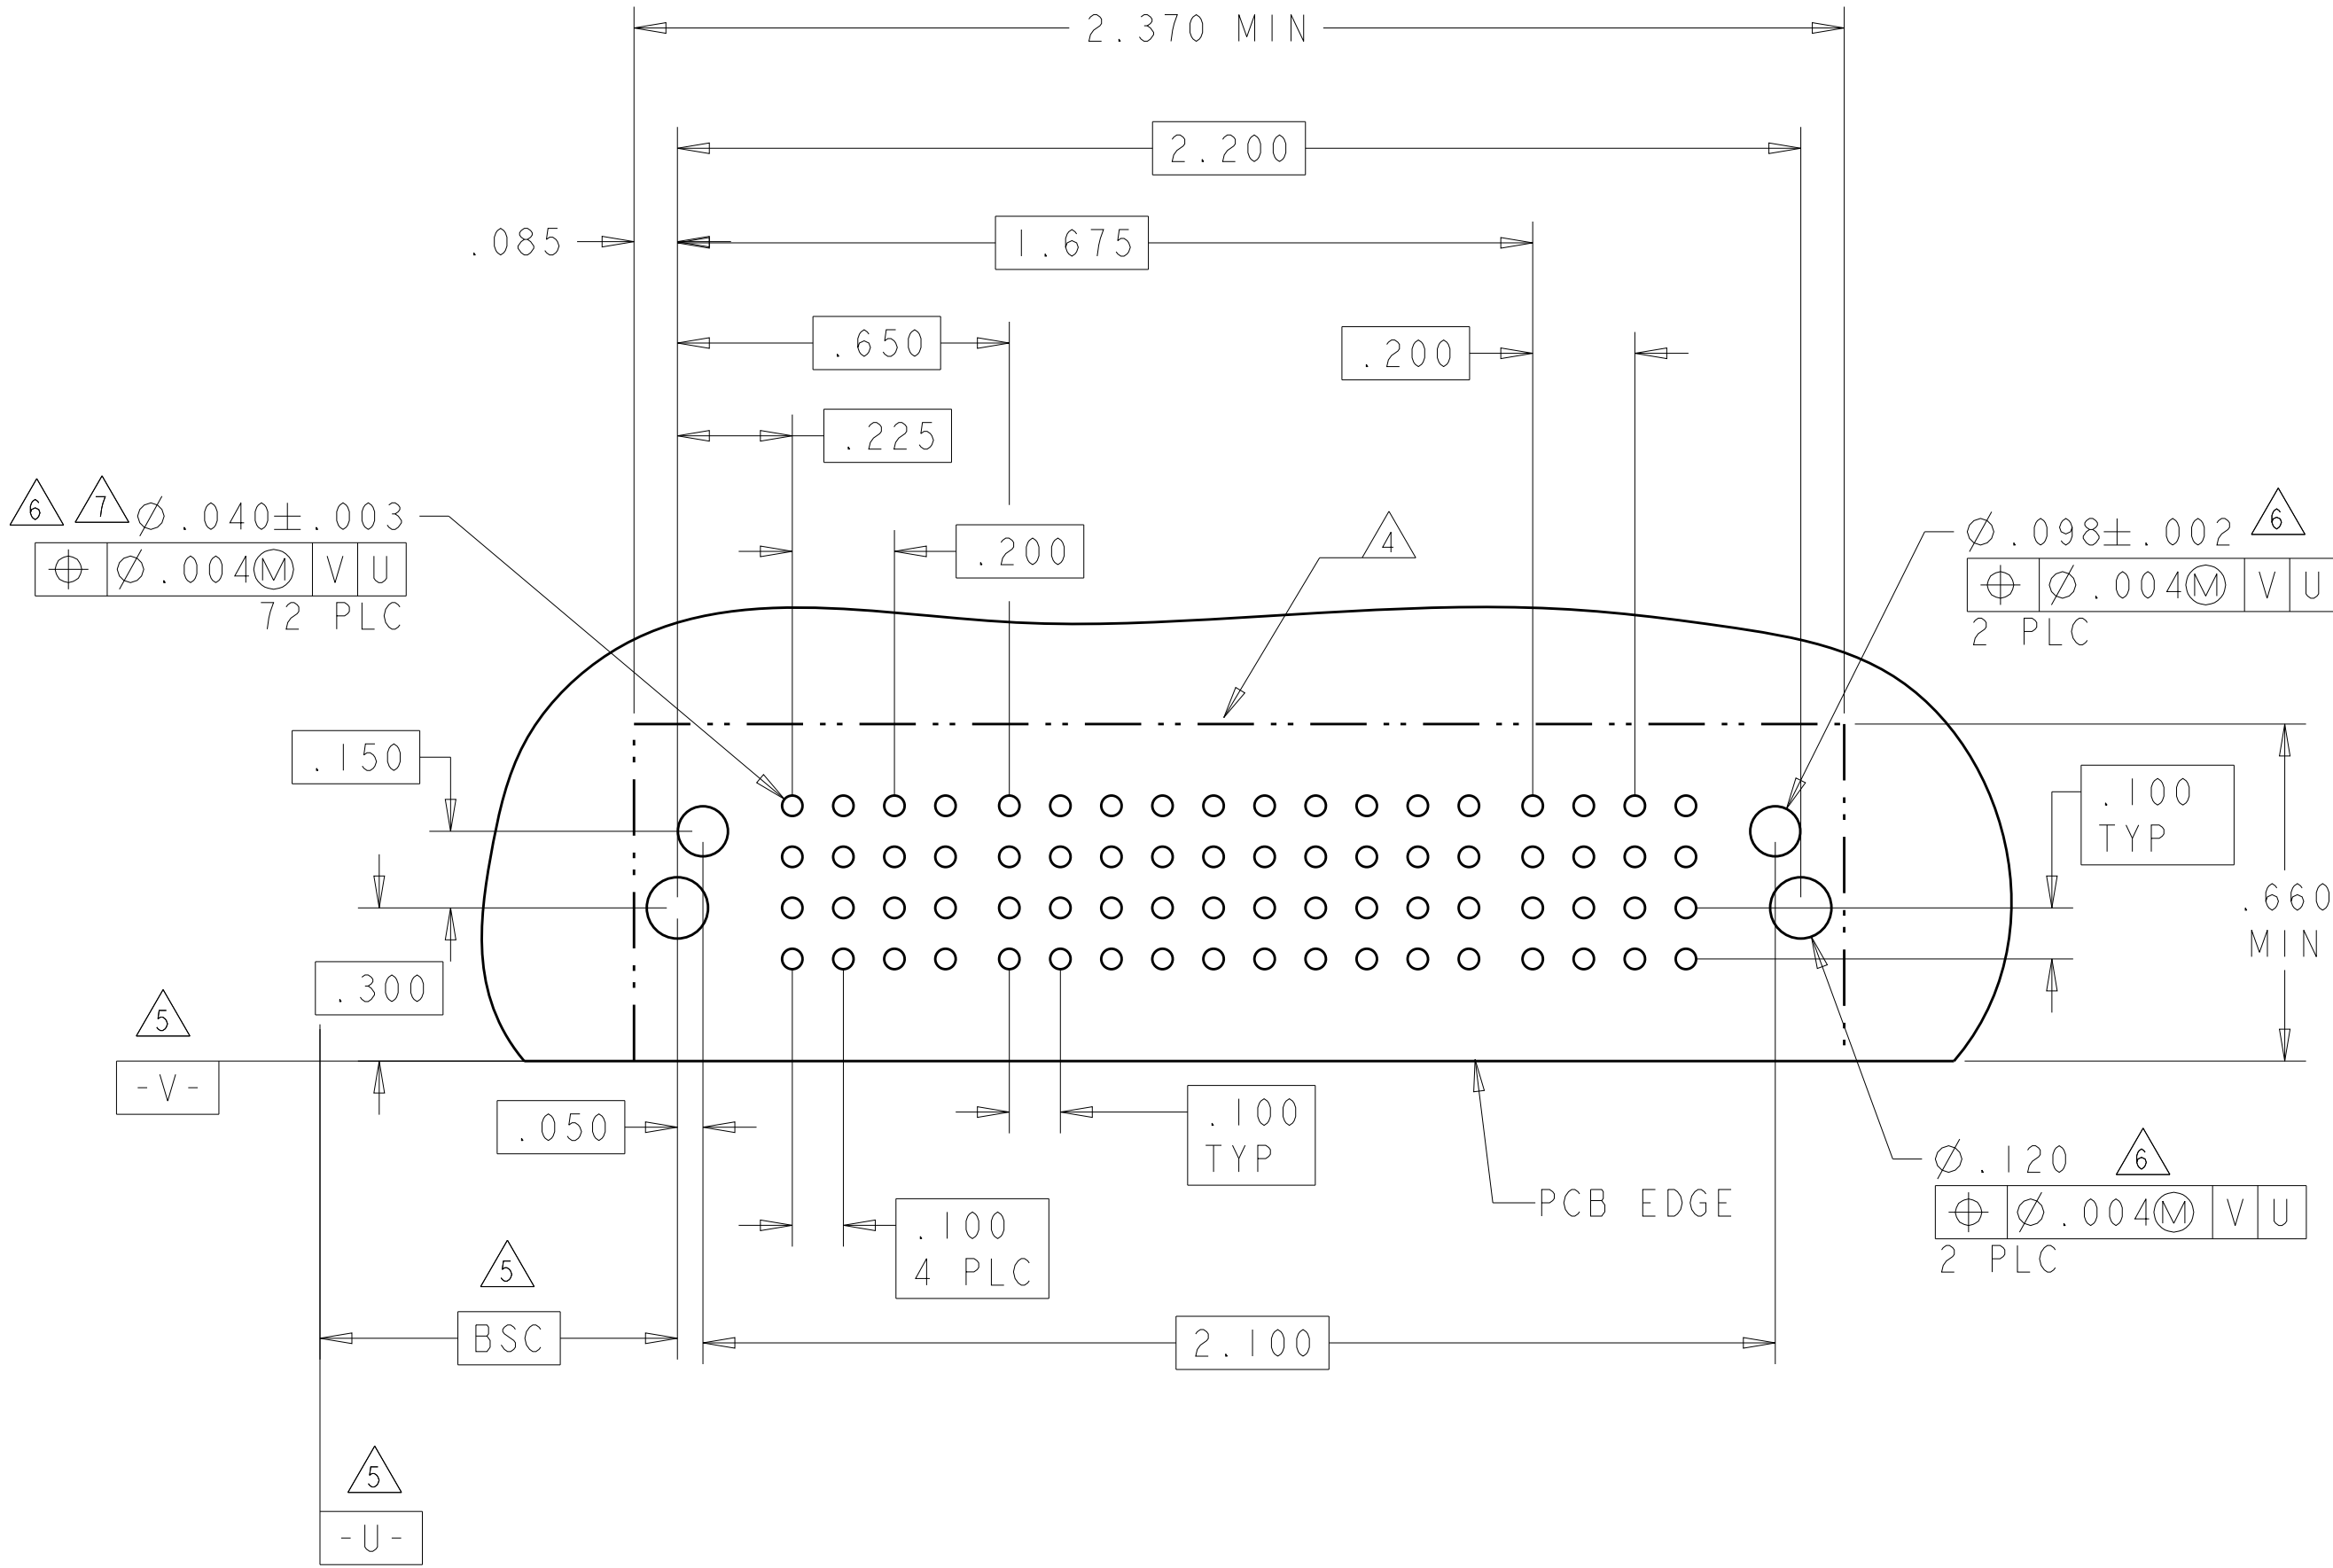

PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P1	1	2	3	4	5	6	P2	
2-6450830-6	D		TM	J	J	J	J	J	J	TM	
	C			K	K	K	K	K	K		
	B			N	N	N	N	N	N		
	A			H	S	S	S	S	S		
			HD								
IP + 24S + IP											

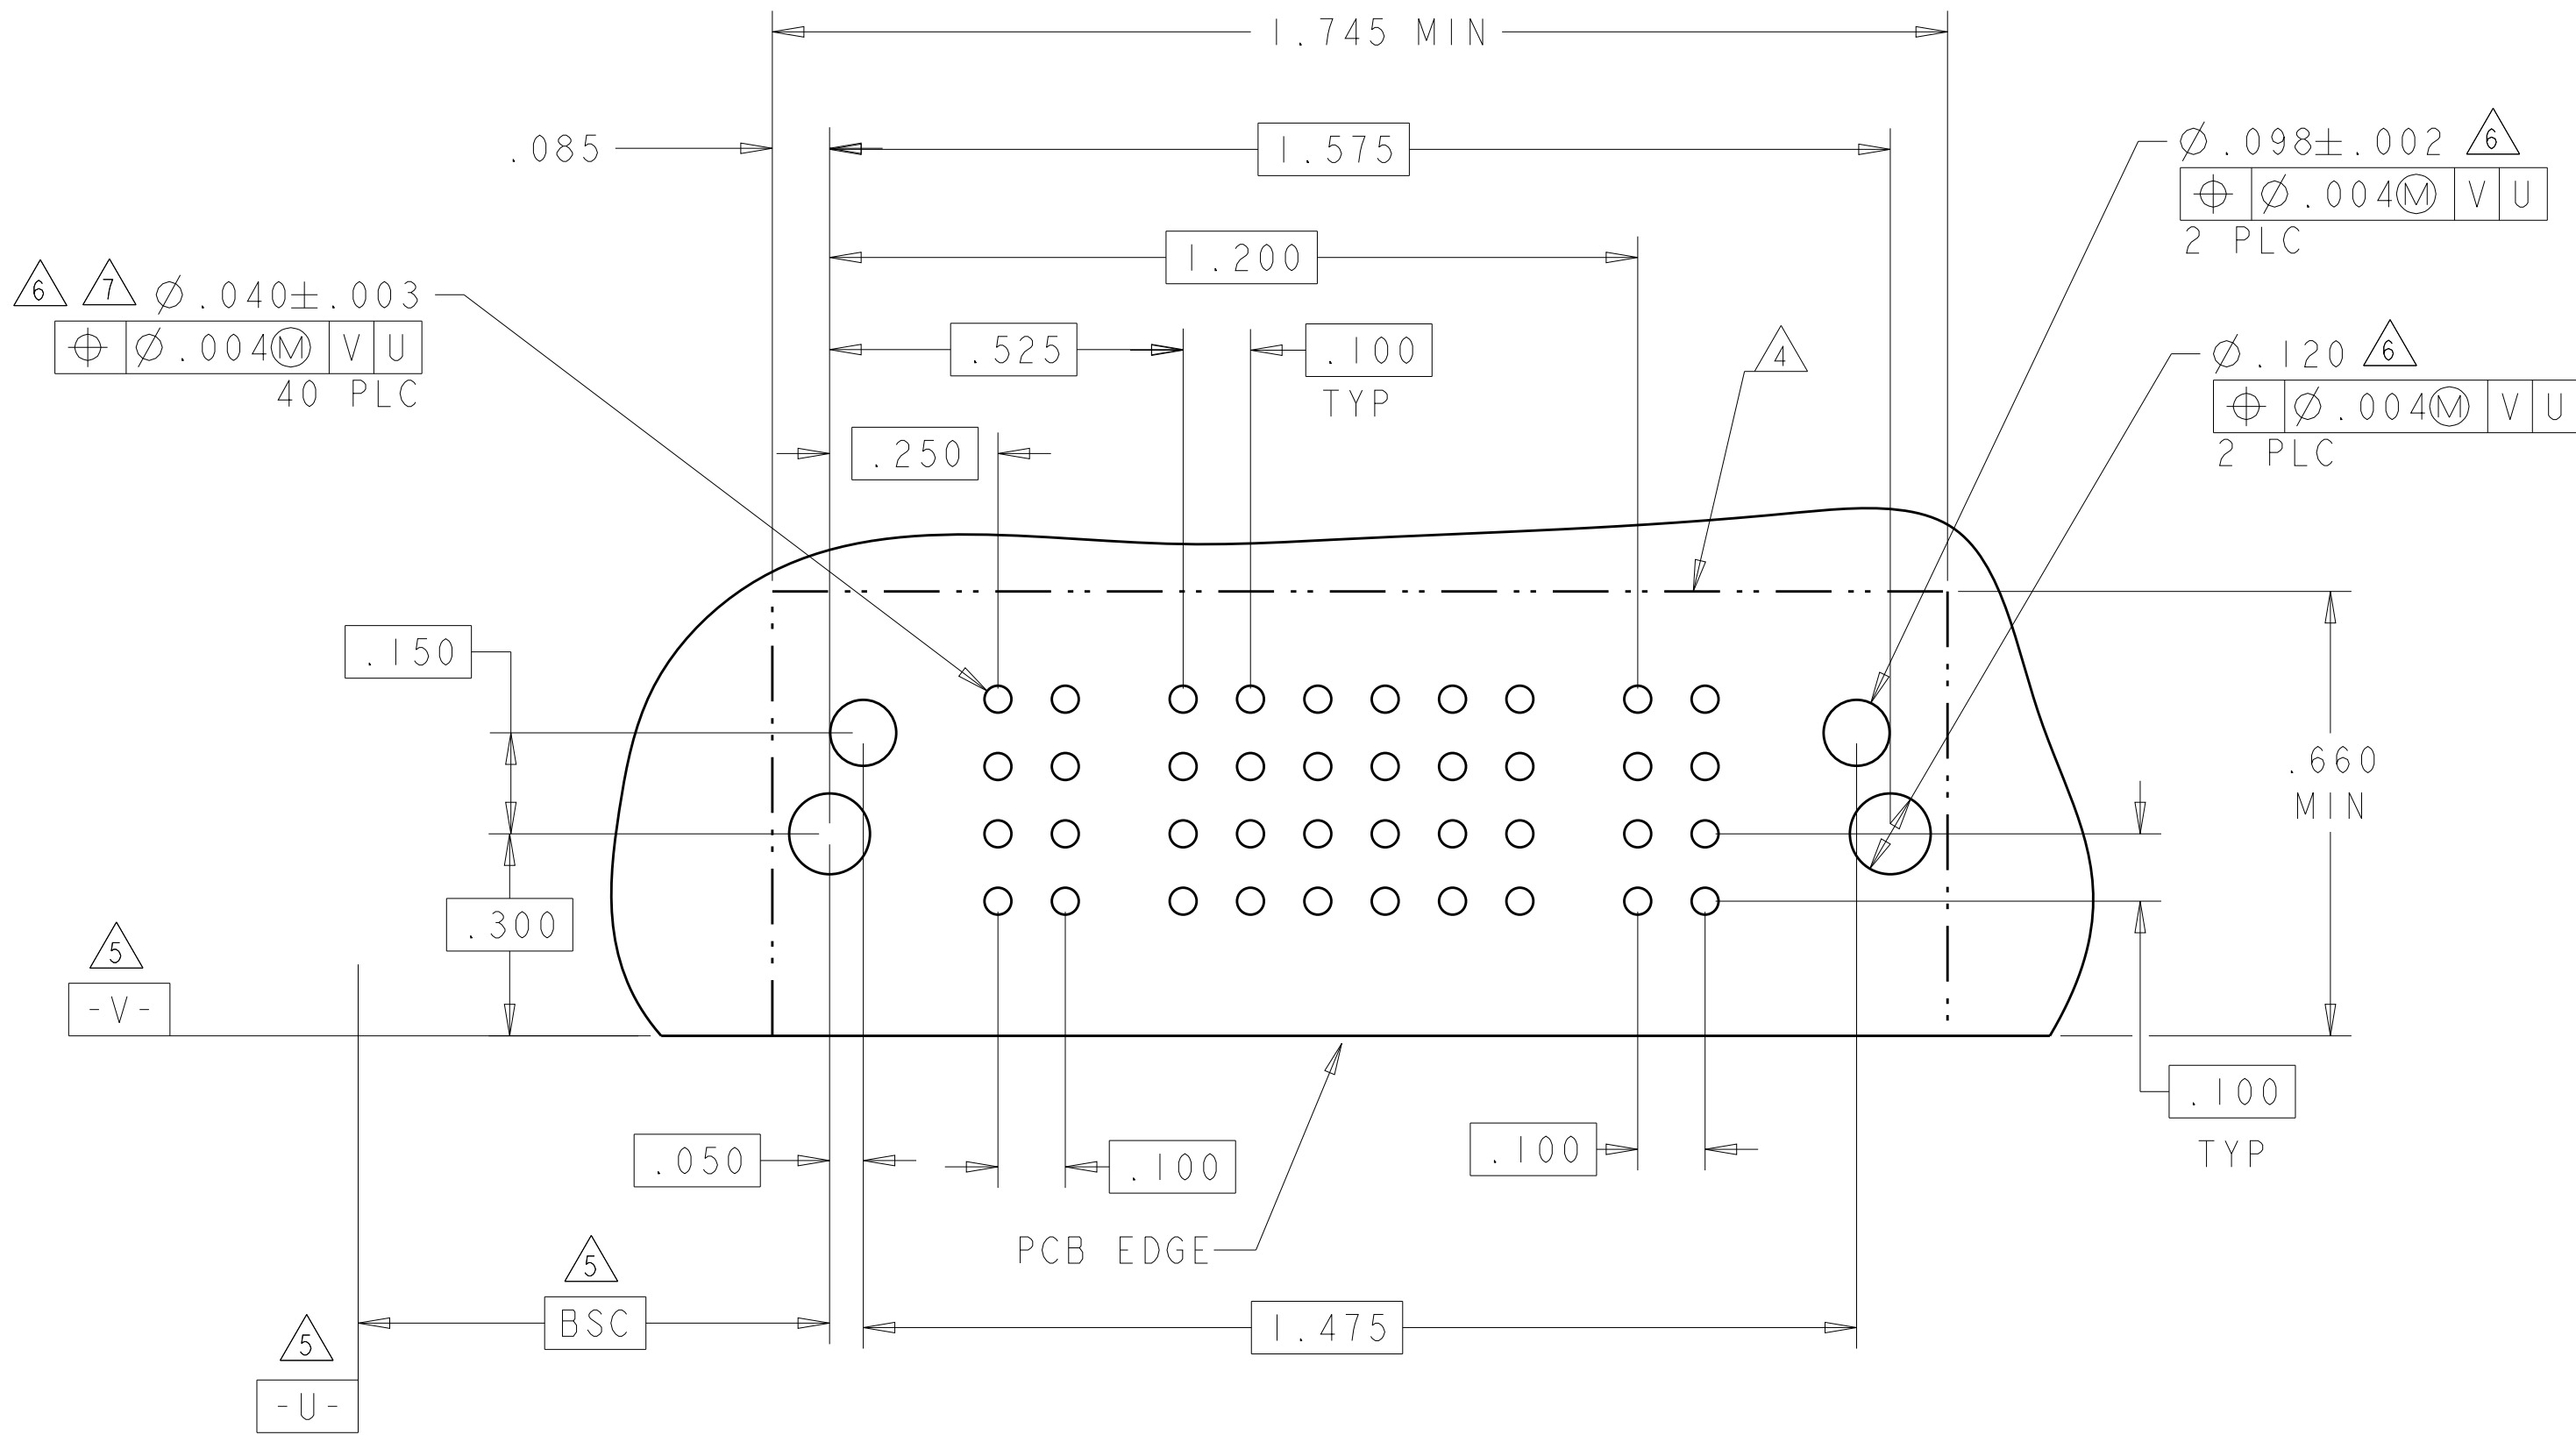

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S. ZHAO

10APR2007

CHK

S. ZHAO

10APR2007

APVD

S. ZHAO

-

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES #2°

FINISH

MATERIAL

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450830

RESTRICTED TO

-

SCALE

4:1

SHEET

14

OF


42






REV



S2

TE Connectivity



PART NUMBER	ROWS		POWER		SIGNAL					POWER		
			P1	P2	1	2	3	4	5	P3	P4	
2-6450830-8	D		TM	TM	J	J	J	J	J	TM	TM	
	K				K	K	K	K				
	N				N	N	N	N				
	S				S	S	S	S				
	A	HD										HD
2P + 20S + 2P												

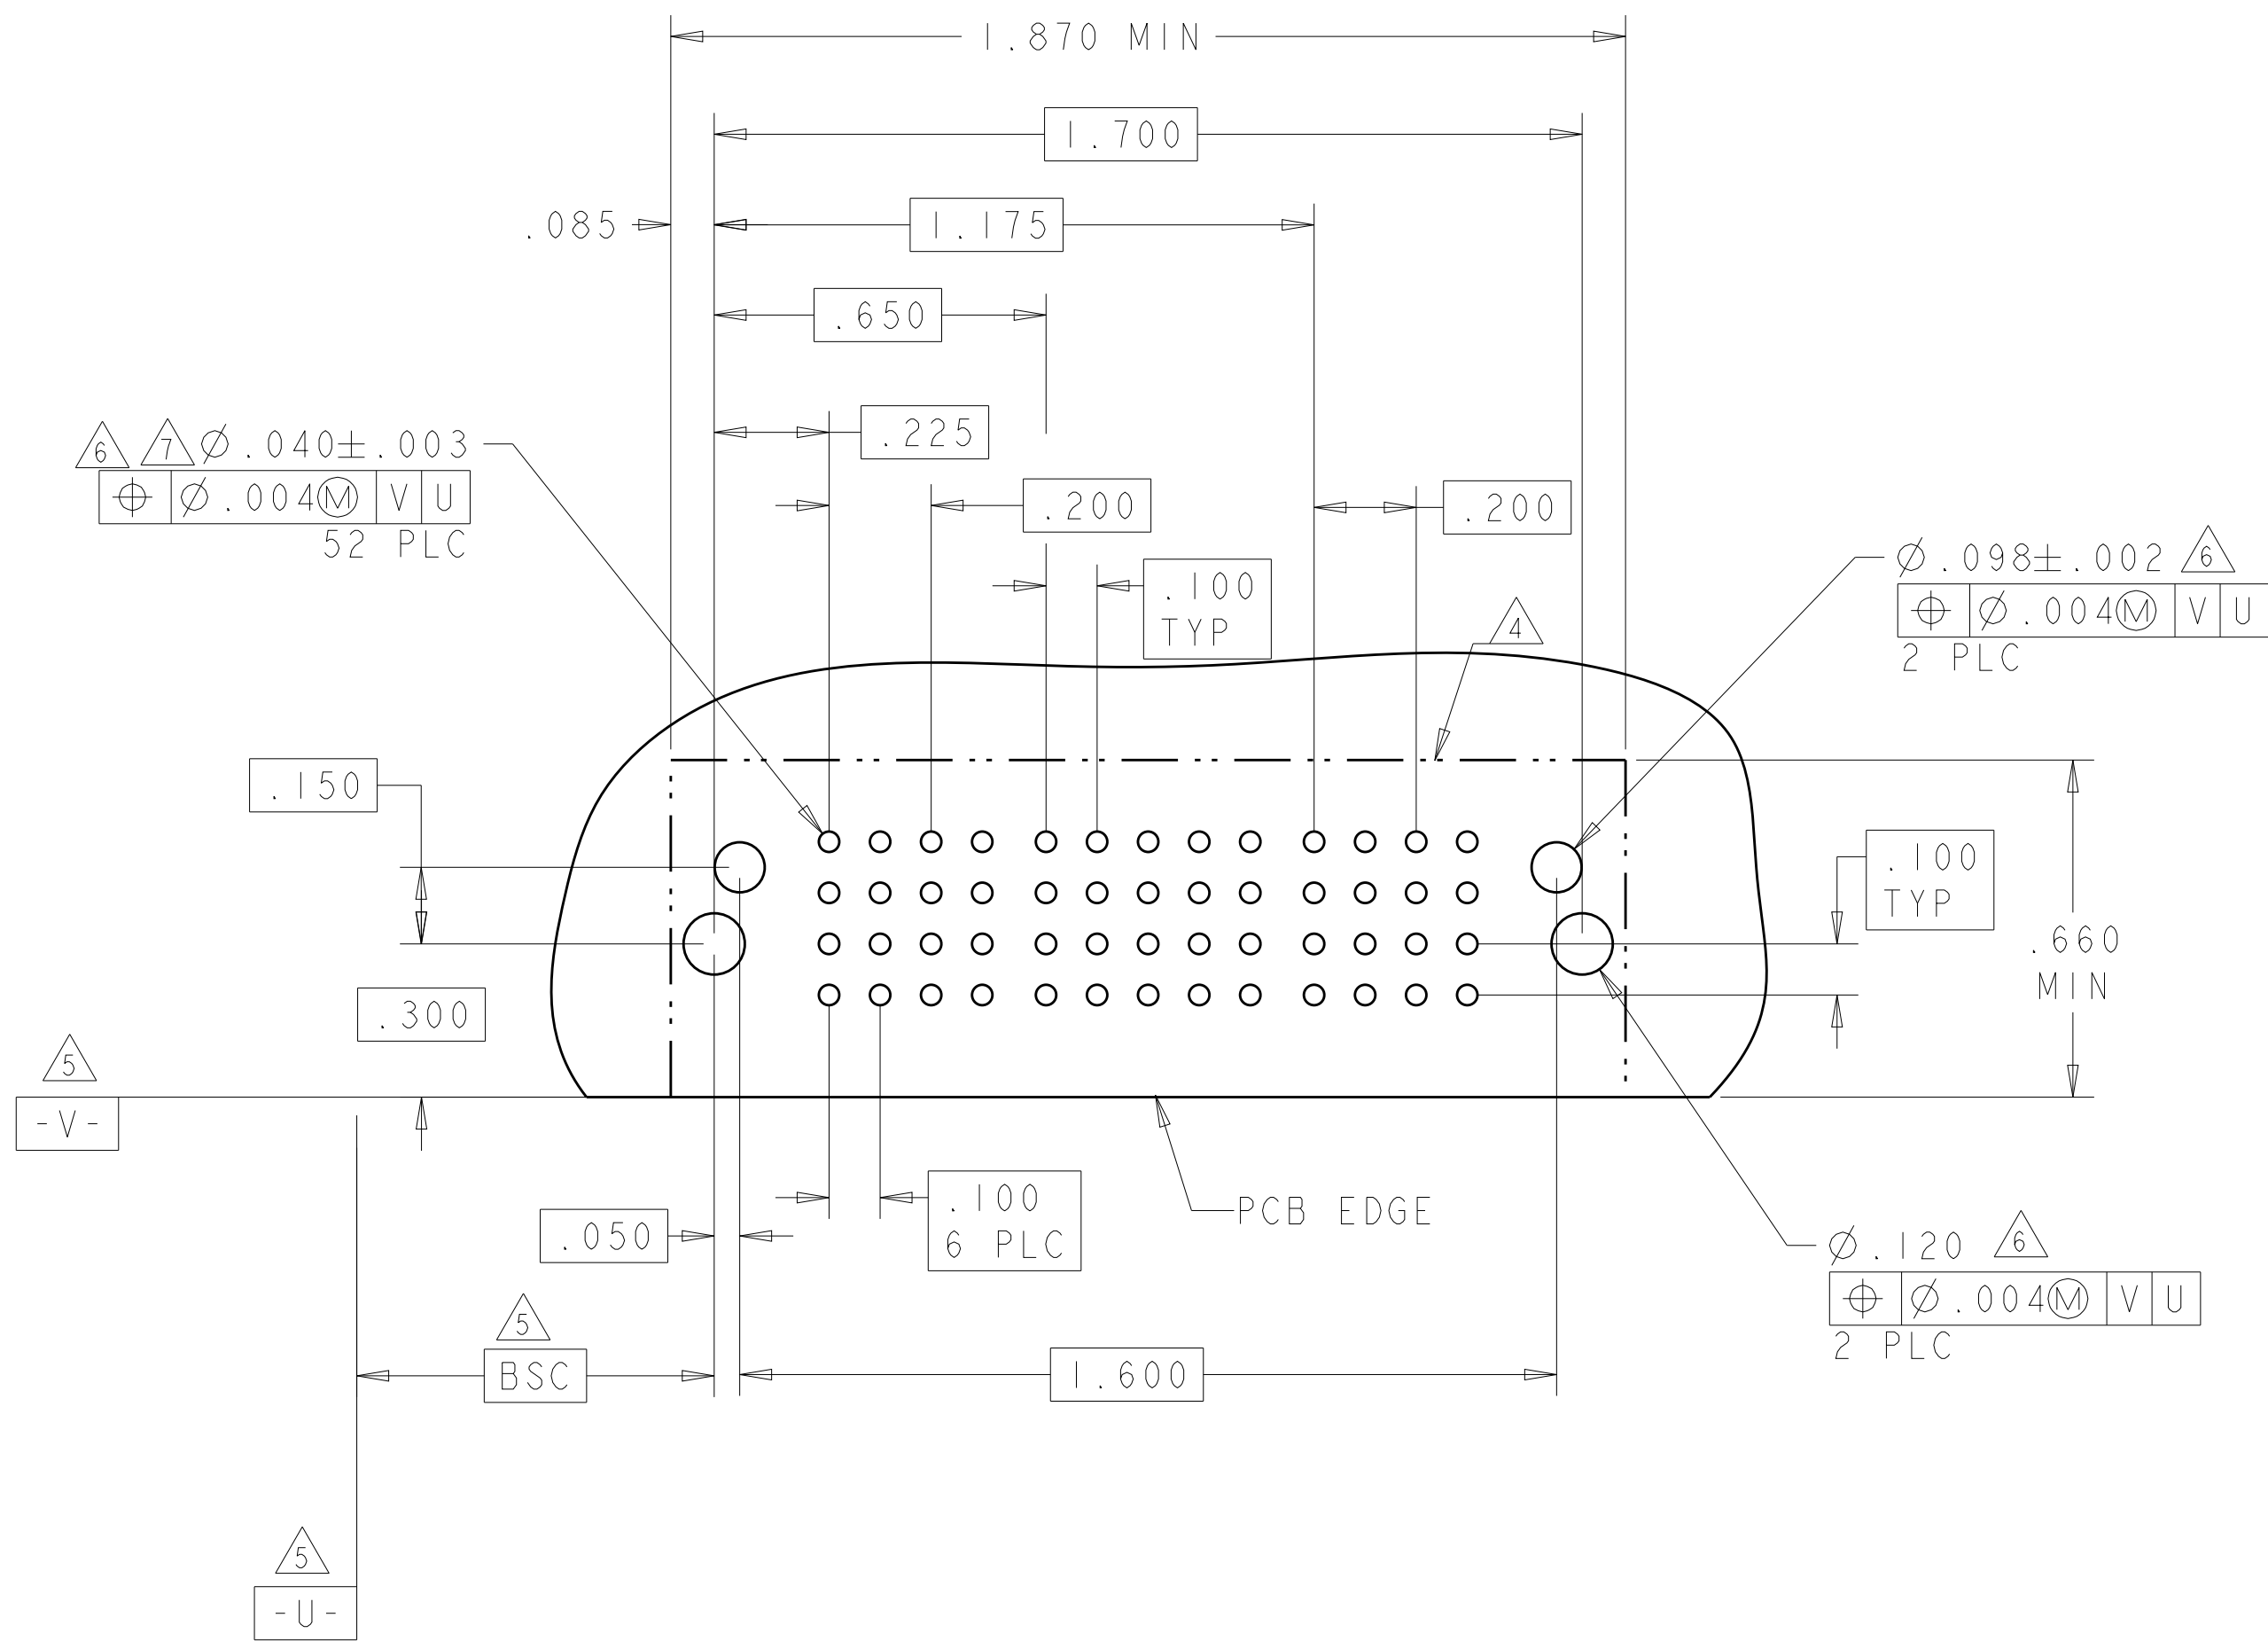4805 (3/11)


PART NUMBER	ROWS		POWER				BLANK	SIGNAL			POWER						
			P1	P2	P3	P4		1	2	3	P5	P6	P7				
3-6450830-0	D C B A						F	J	J								
														F	F	K	K
														N	N	N	N
														S	S	S	S
4ACP + 12S + 3P																	

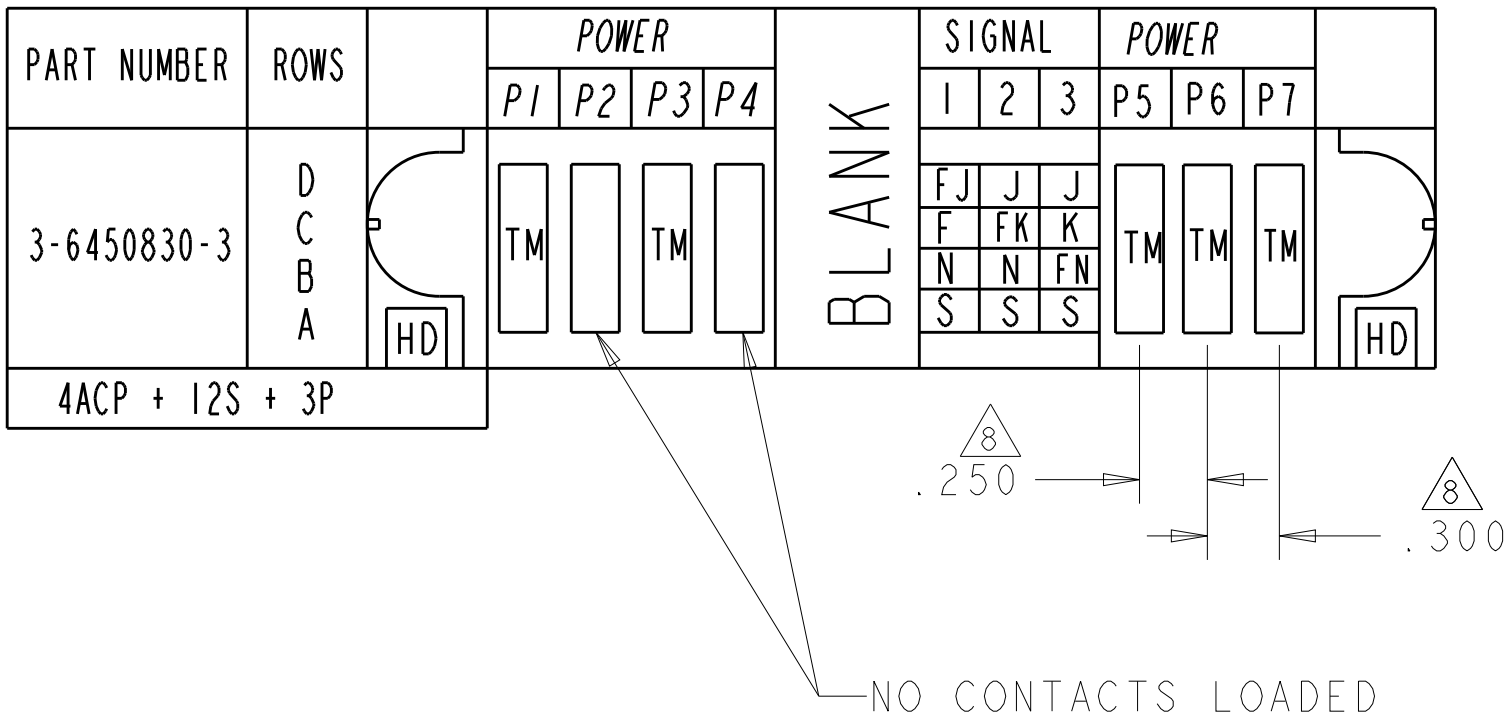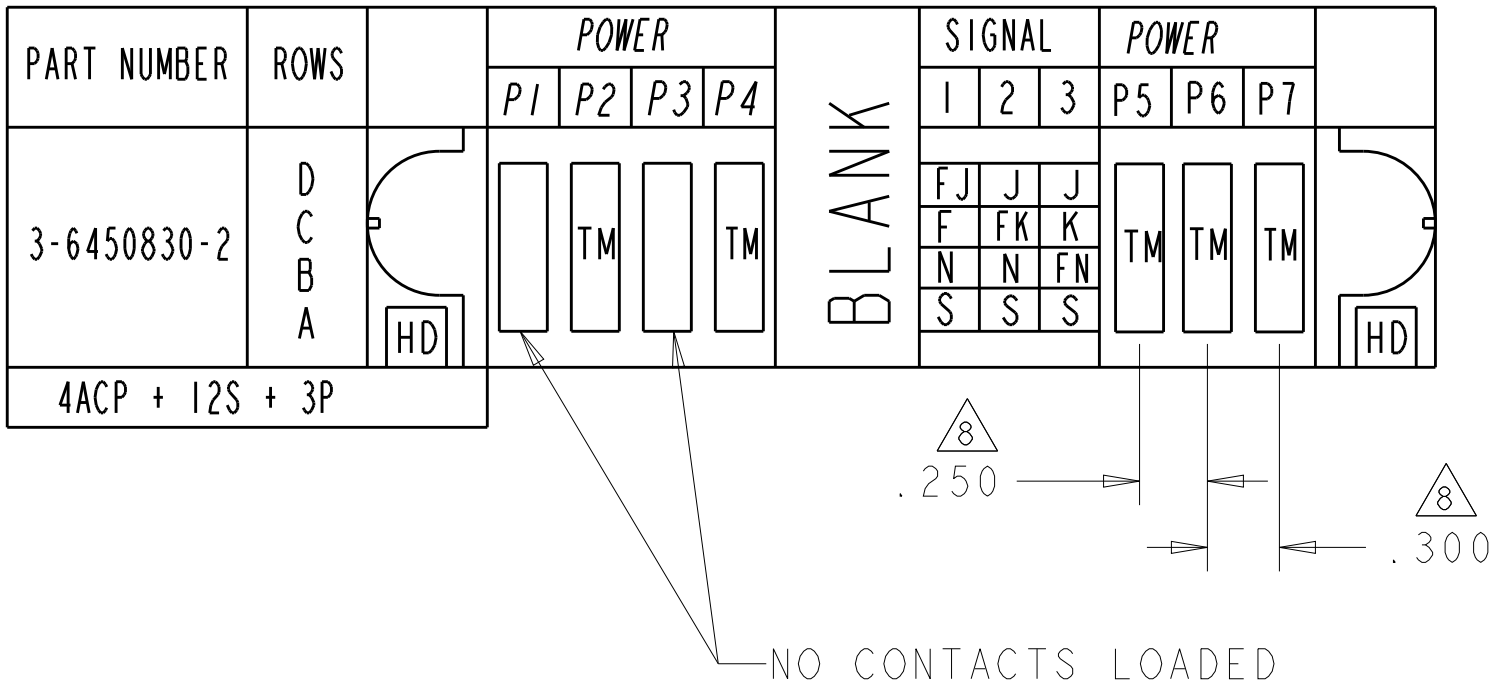4805 (3/11)

PART NUMBER	ROWS		POWER		SIGNAL		POWER				
			P1	P2	1	2	LP1	LP2	LP3	LP4	
3-6450830-6	D		TM	TM	J	J	LM	LM	LM	LM	
	C				K	K					
	B				N	N					
	A				S	S					
2ACP + 8S + 4LP											

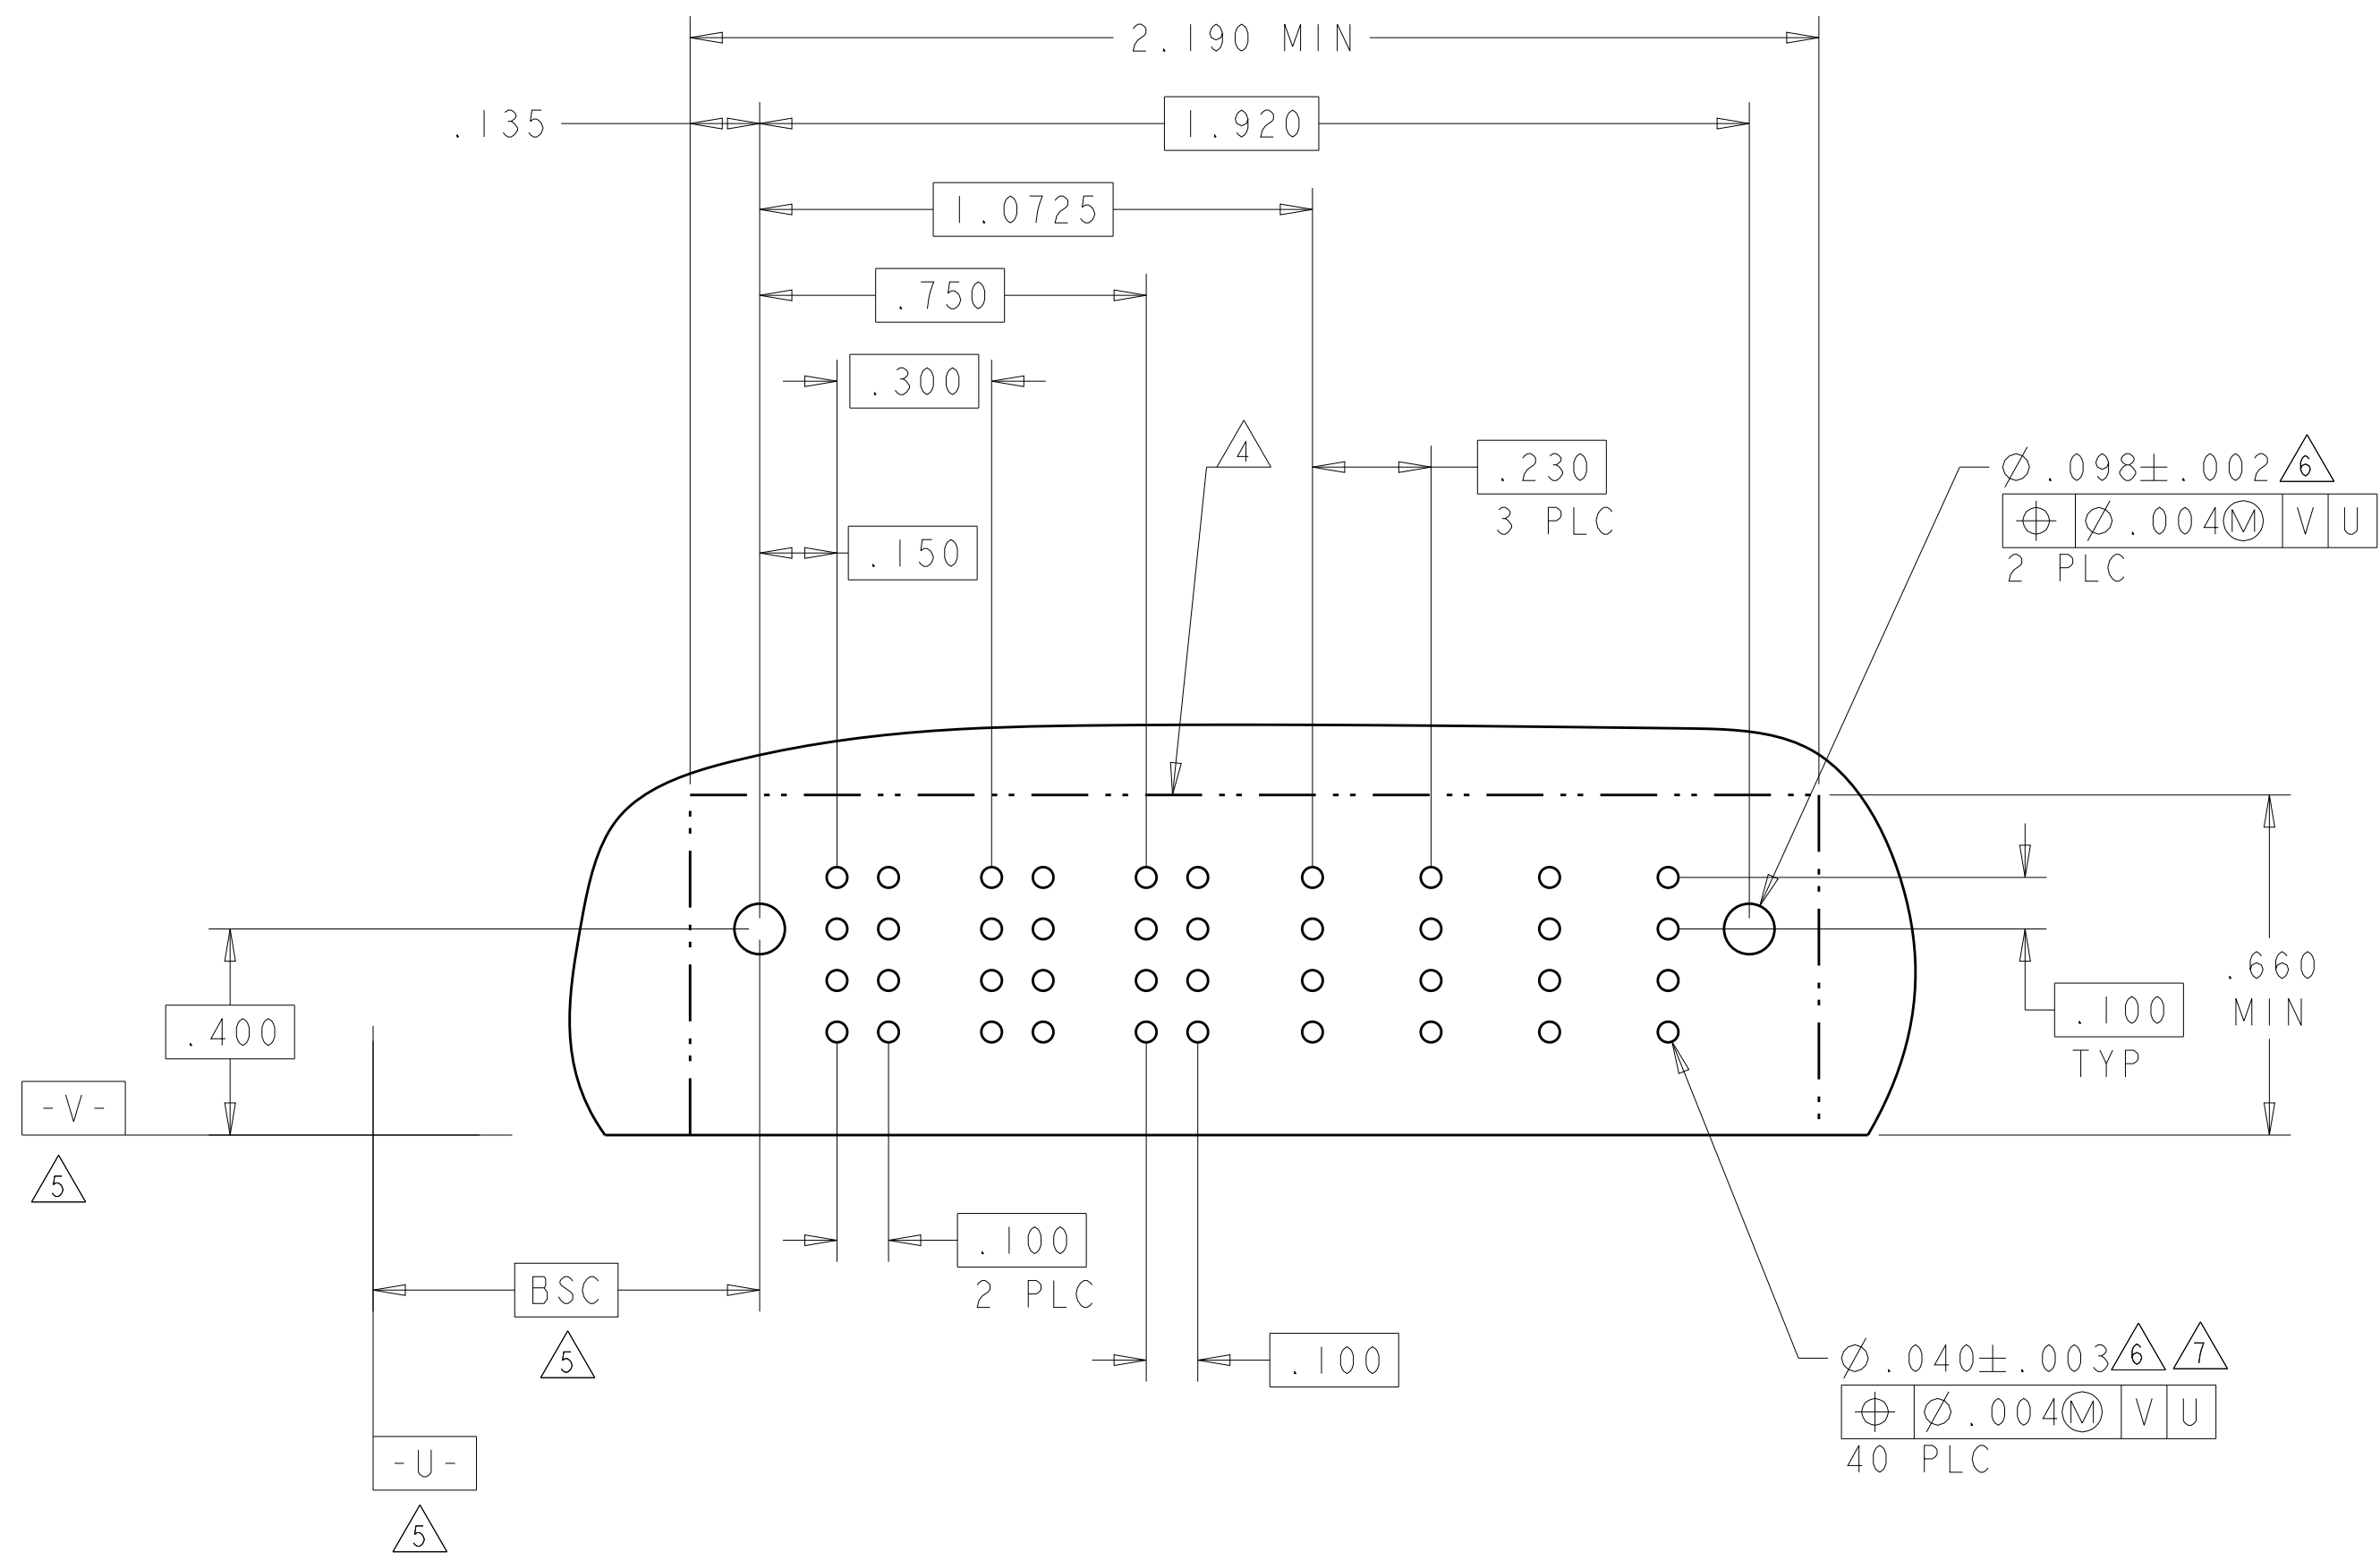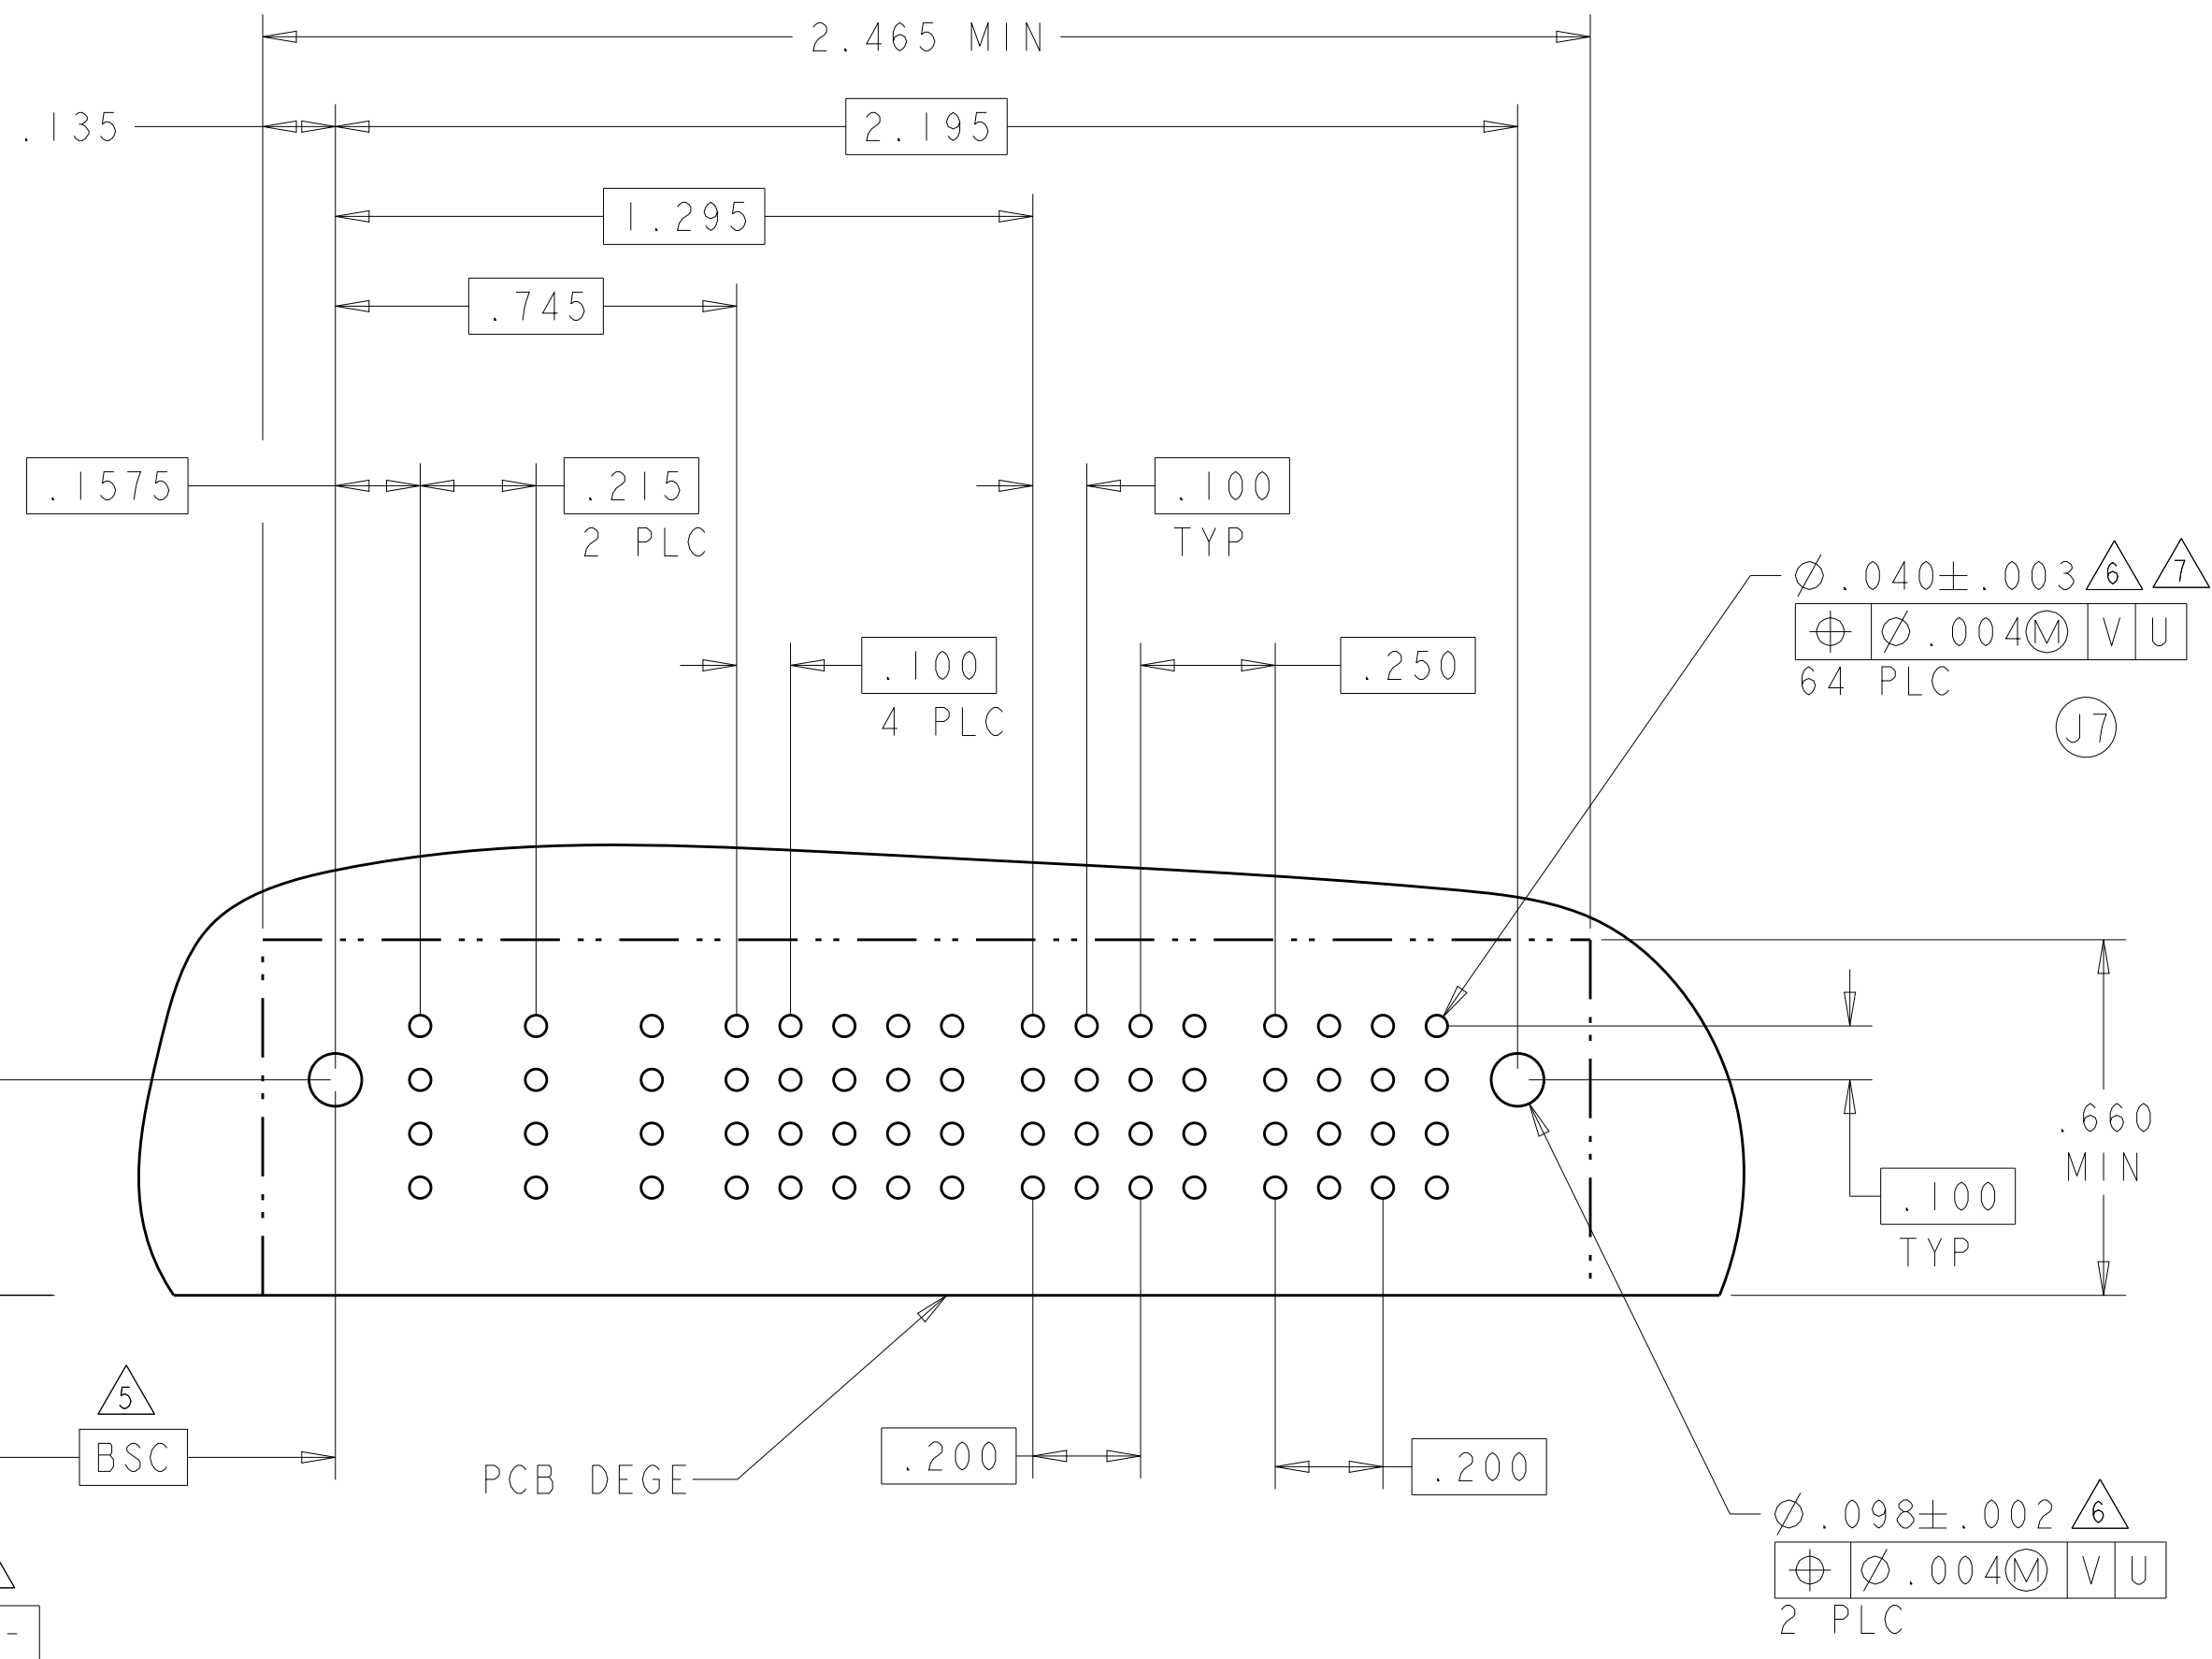4805 (3/11)



PART NUMBER	ROWS		POWER					SIGNAL			POWER				
			P1	P2	P3	P4	P5	1	2	3	P6	P7	P8	P9	
3-6450830-8	D C B A		TM	TM	TM	TM	TM	J K N S	J K N S	J K N H	TM	TM	TM	TM	
5ACP + 12S + 4ACP															

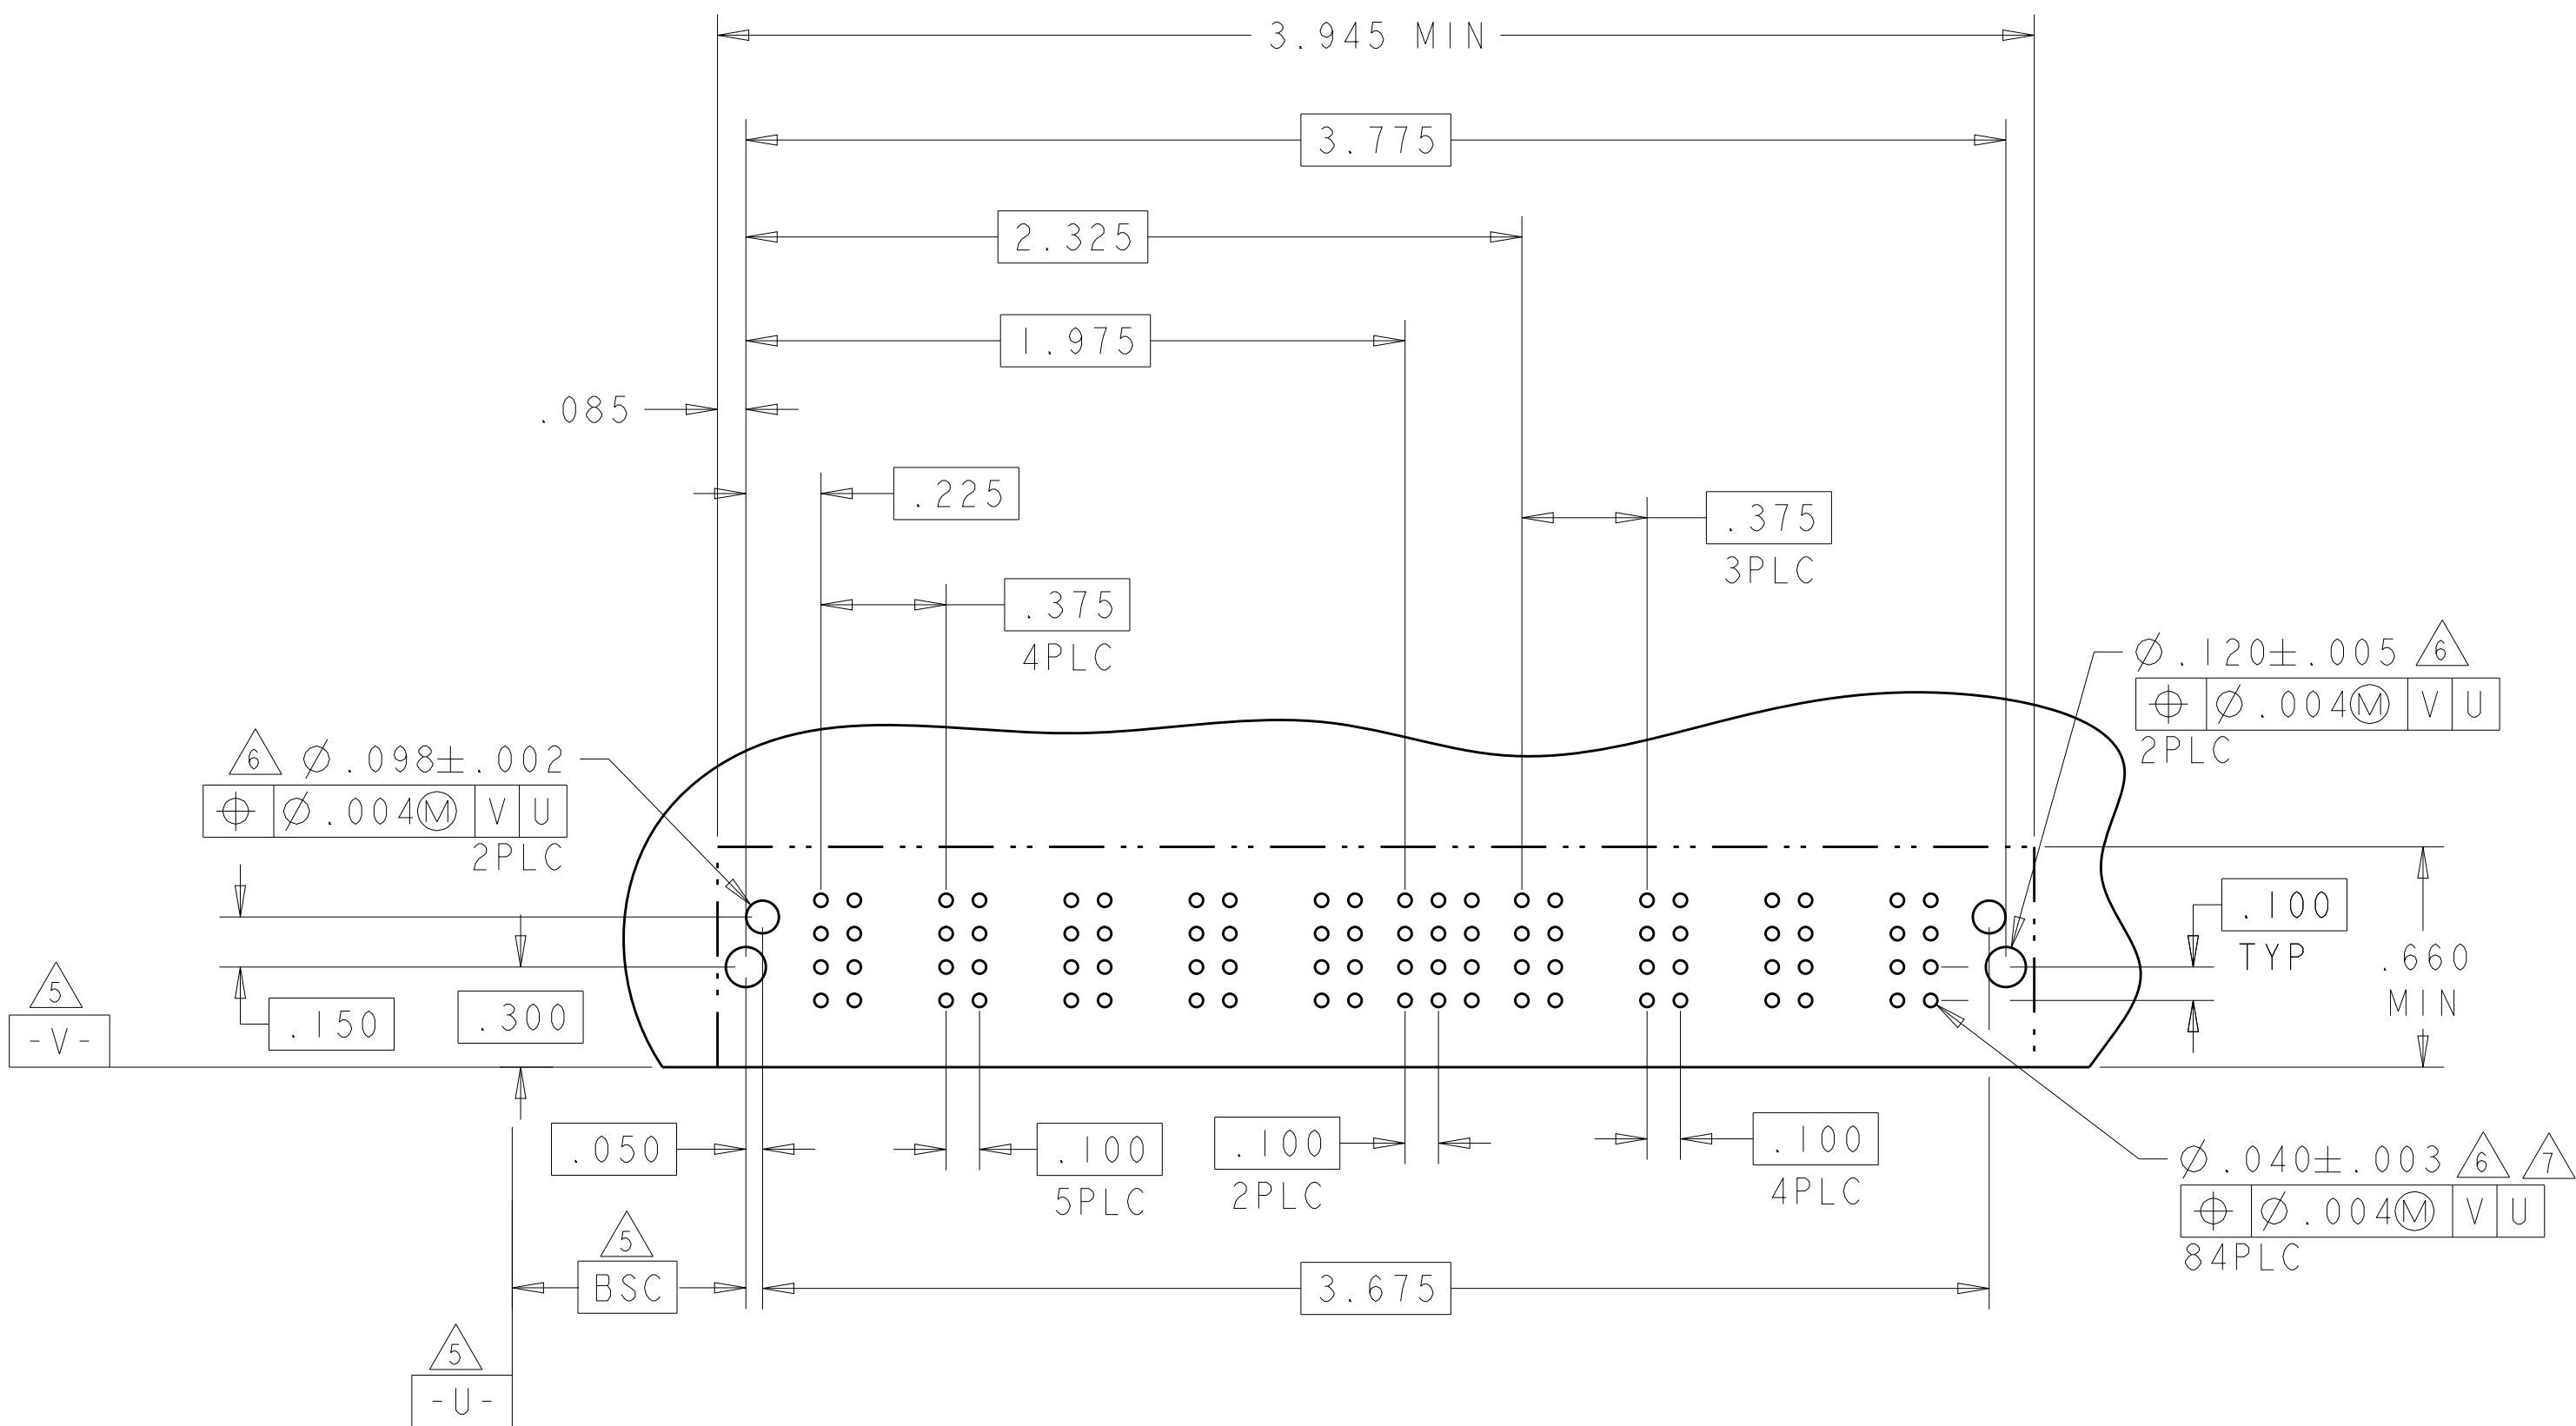4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P1	P2	P3	P4	1	2	3	P5	P6	P7	P8	
4-6450830-2	D		TM	TM	TM	TM	J	J	J	TM	TM	TM	TM	
	C						K	K	K					
	B						N	N	N					
	A	HD					S	S	S					HD
4P + 12S + 4P														

PART NUMBER	ROWS		LOW POWER		SIGNAL				LOW POWER		
			LPI	LP2	I	2	3	4	LP3	LP4	
6-6450830-0	D		LM	LM	J	J	J	E	LM	LM	
	C				K	K	K	K			
	B				N	N	N	N			
	A				S	S	S	S			
2LP + 16S + 2LP											

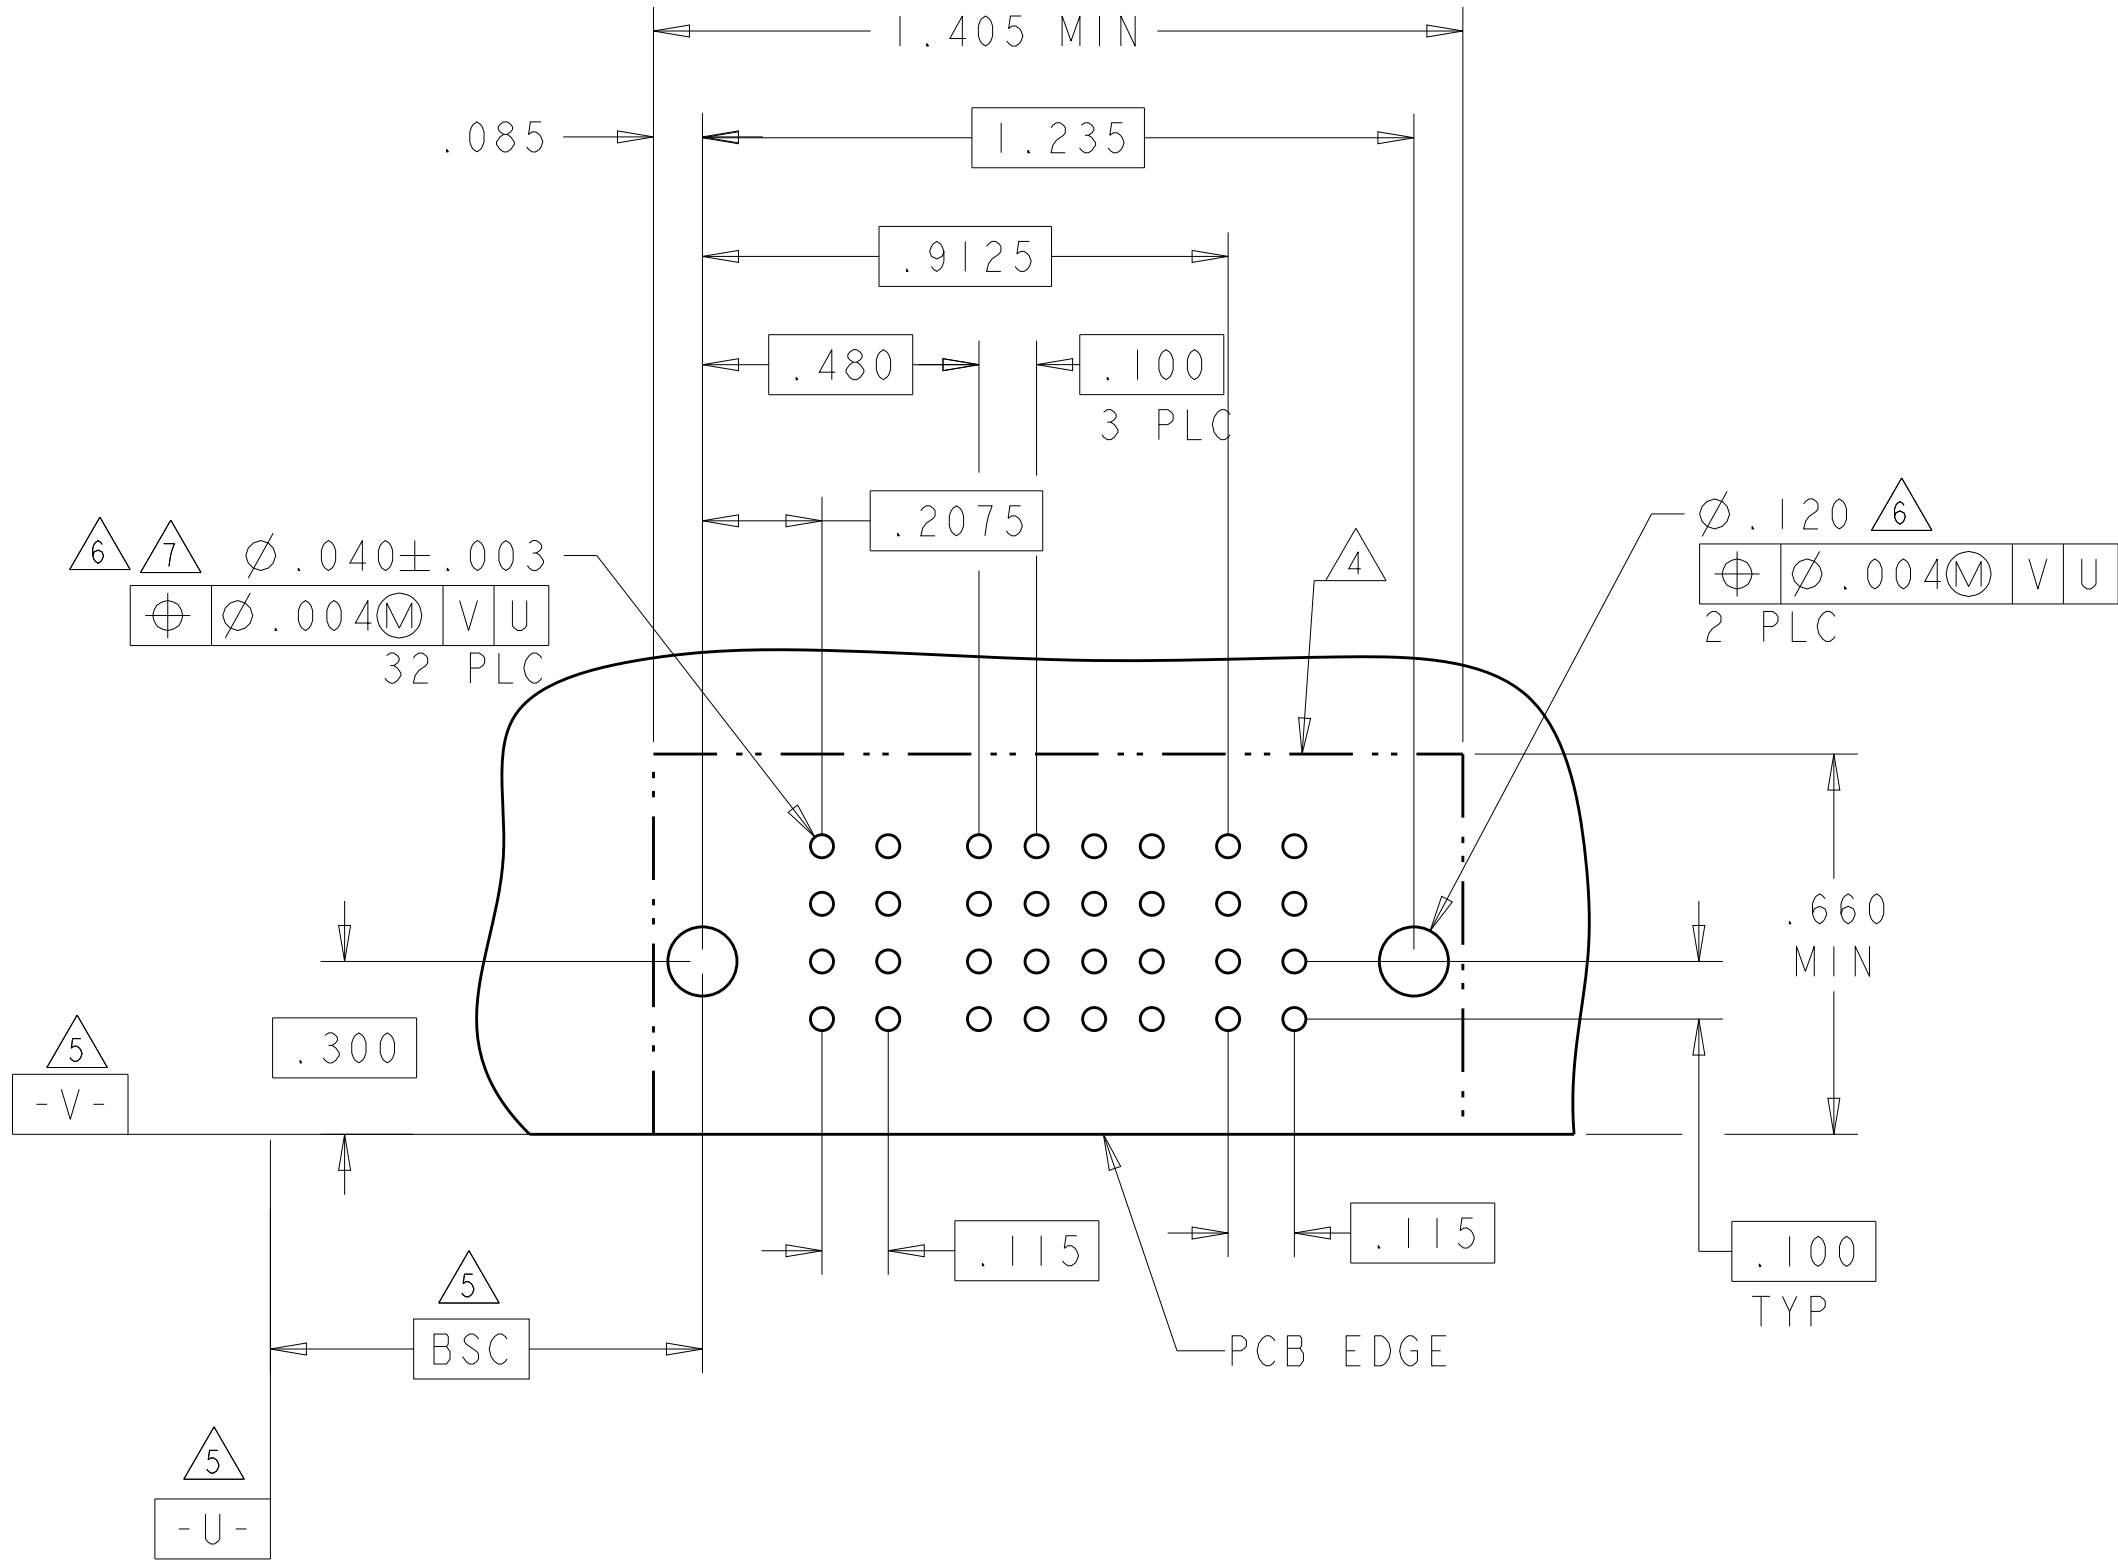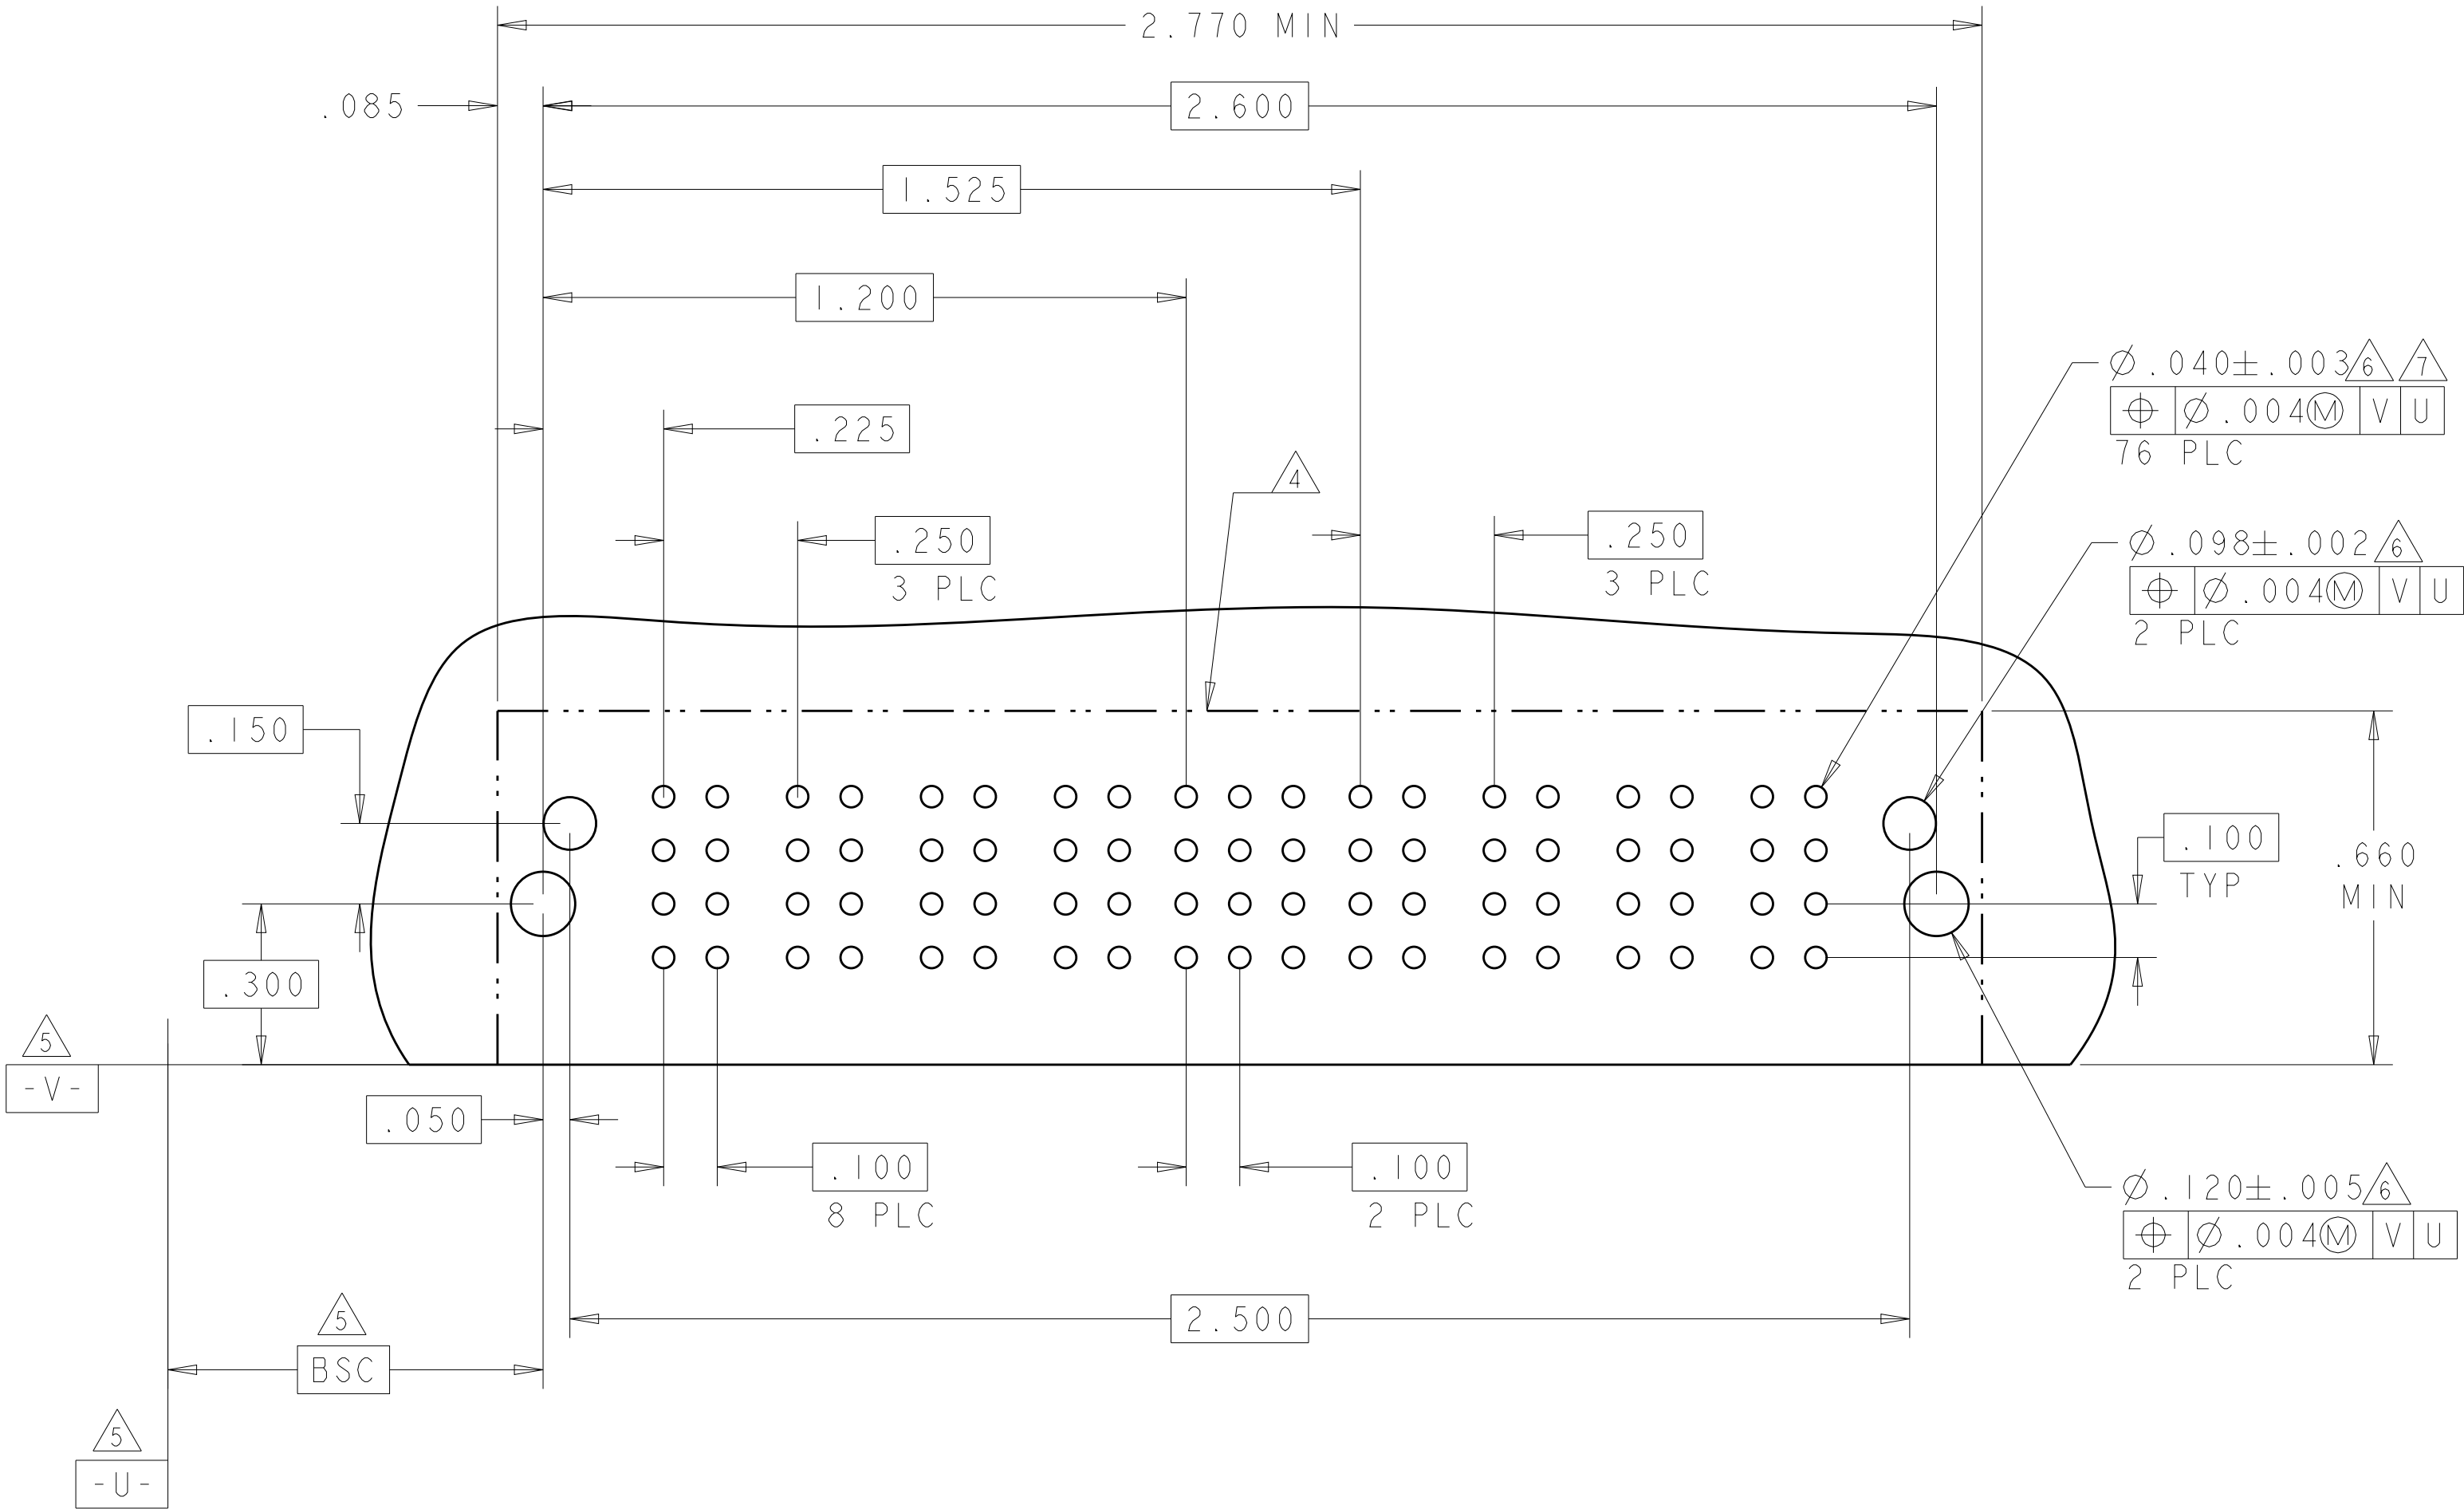


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL			POWER																
			P1	P2	P3	P4	I	2	3	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15	P16	P17	P18	P19	P20	
4-6450830-3	D		TM	TM	TM	TM	J	J	J	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	TM	
	K						K	K																		
	N						N	N																		
	S						S	S																		
4P + 12S + 16P			HD																							

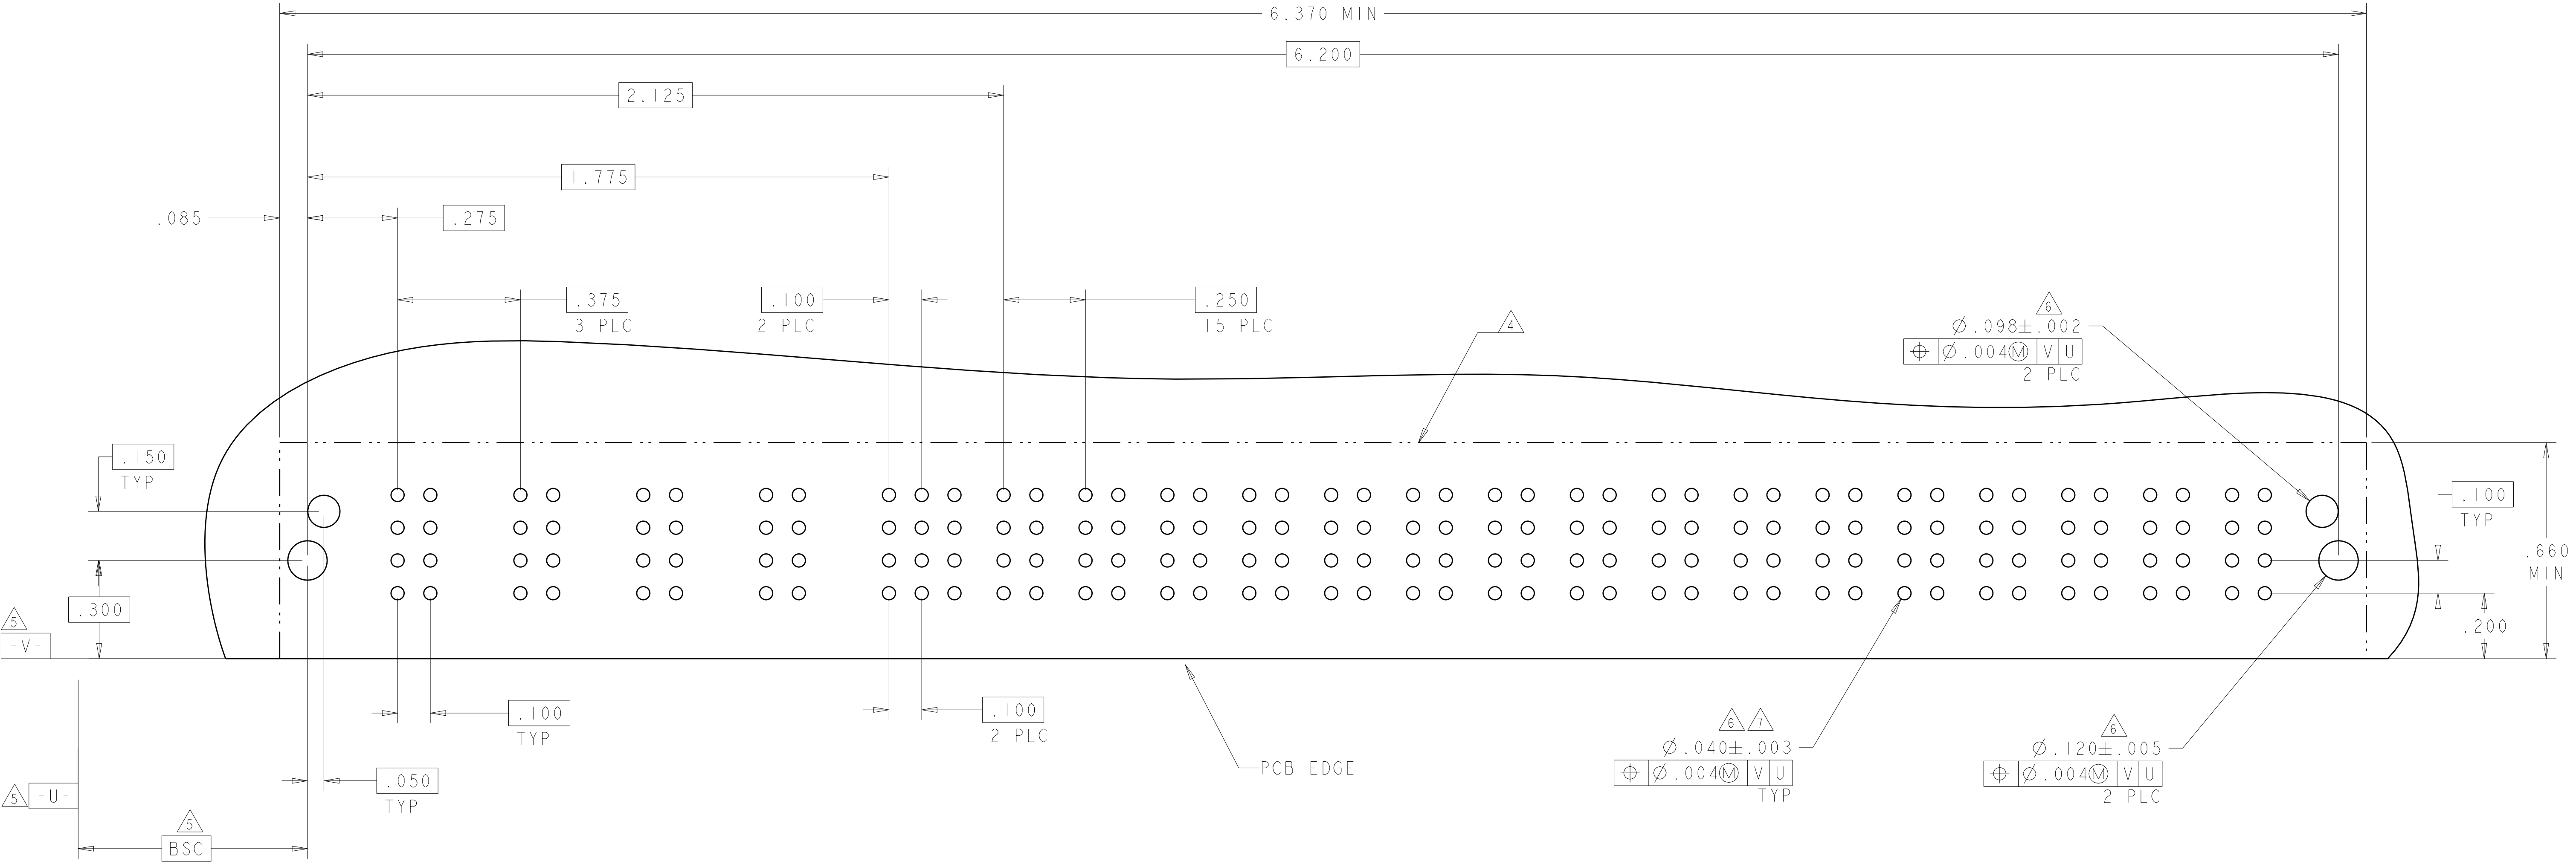



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007	 TE Connectivity			
		CHK S. ZHAO 10APR2007				
DIMENSIONS: INCHES		APVD S. ZHAO -	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	SIZE CAGE CODE DRAWING NO	RESTRICTED TO -	
		PRODUCT SPEC 108-2292				
		APPLICATION SPEC 114-13251				
		WEIGHT -				
		FINISH -				
MATERIAL -			A100779	C=6450830	REV S2	
CUSTOMER DRAWING			SCALE 4:1	SHEET 21 OF 42		

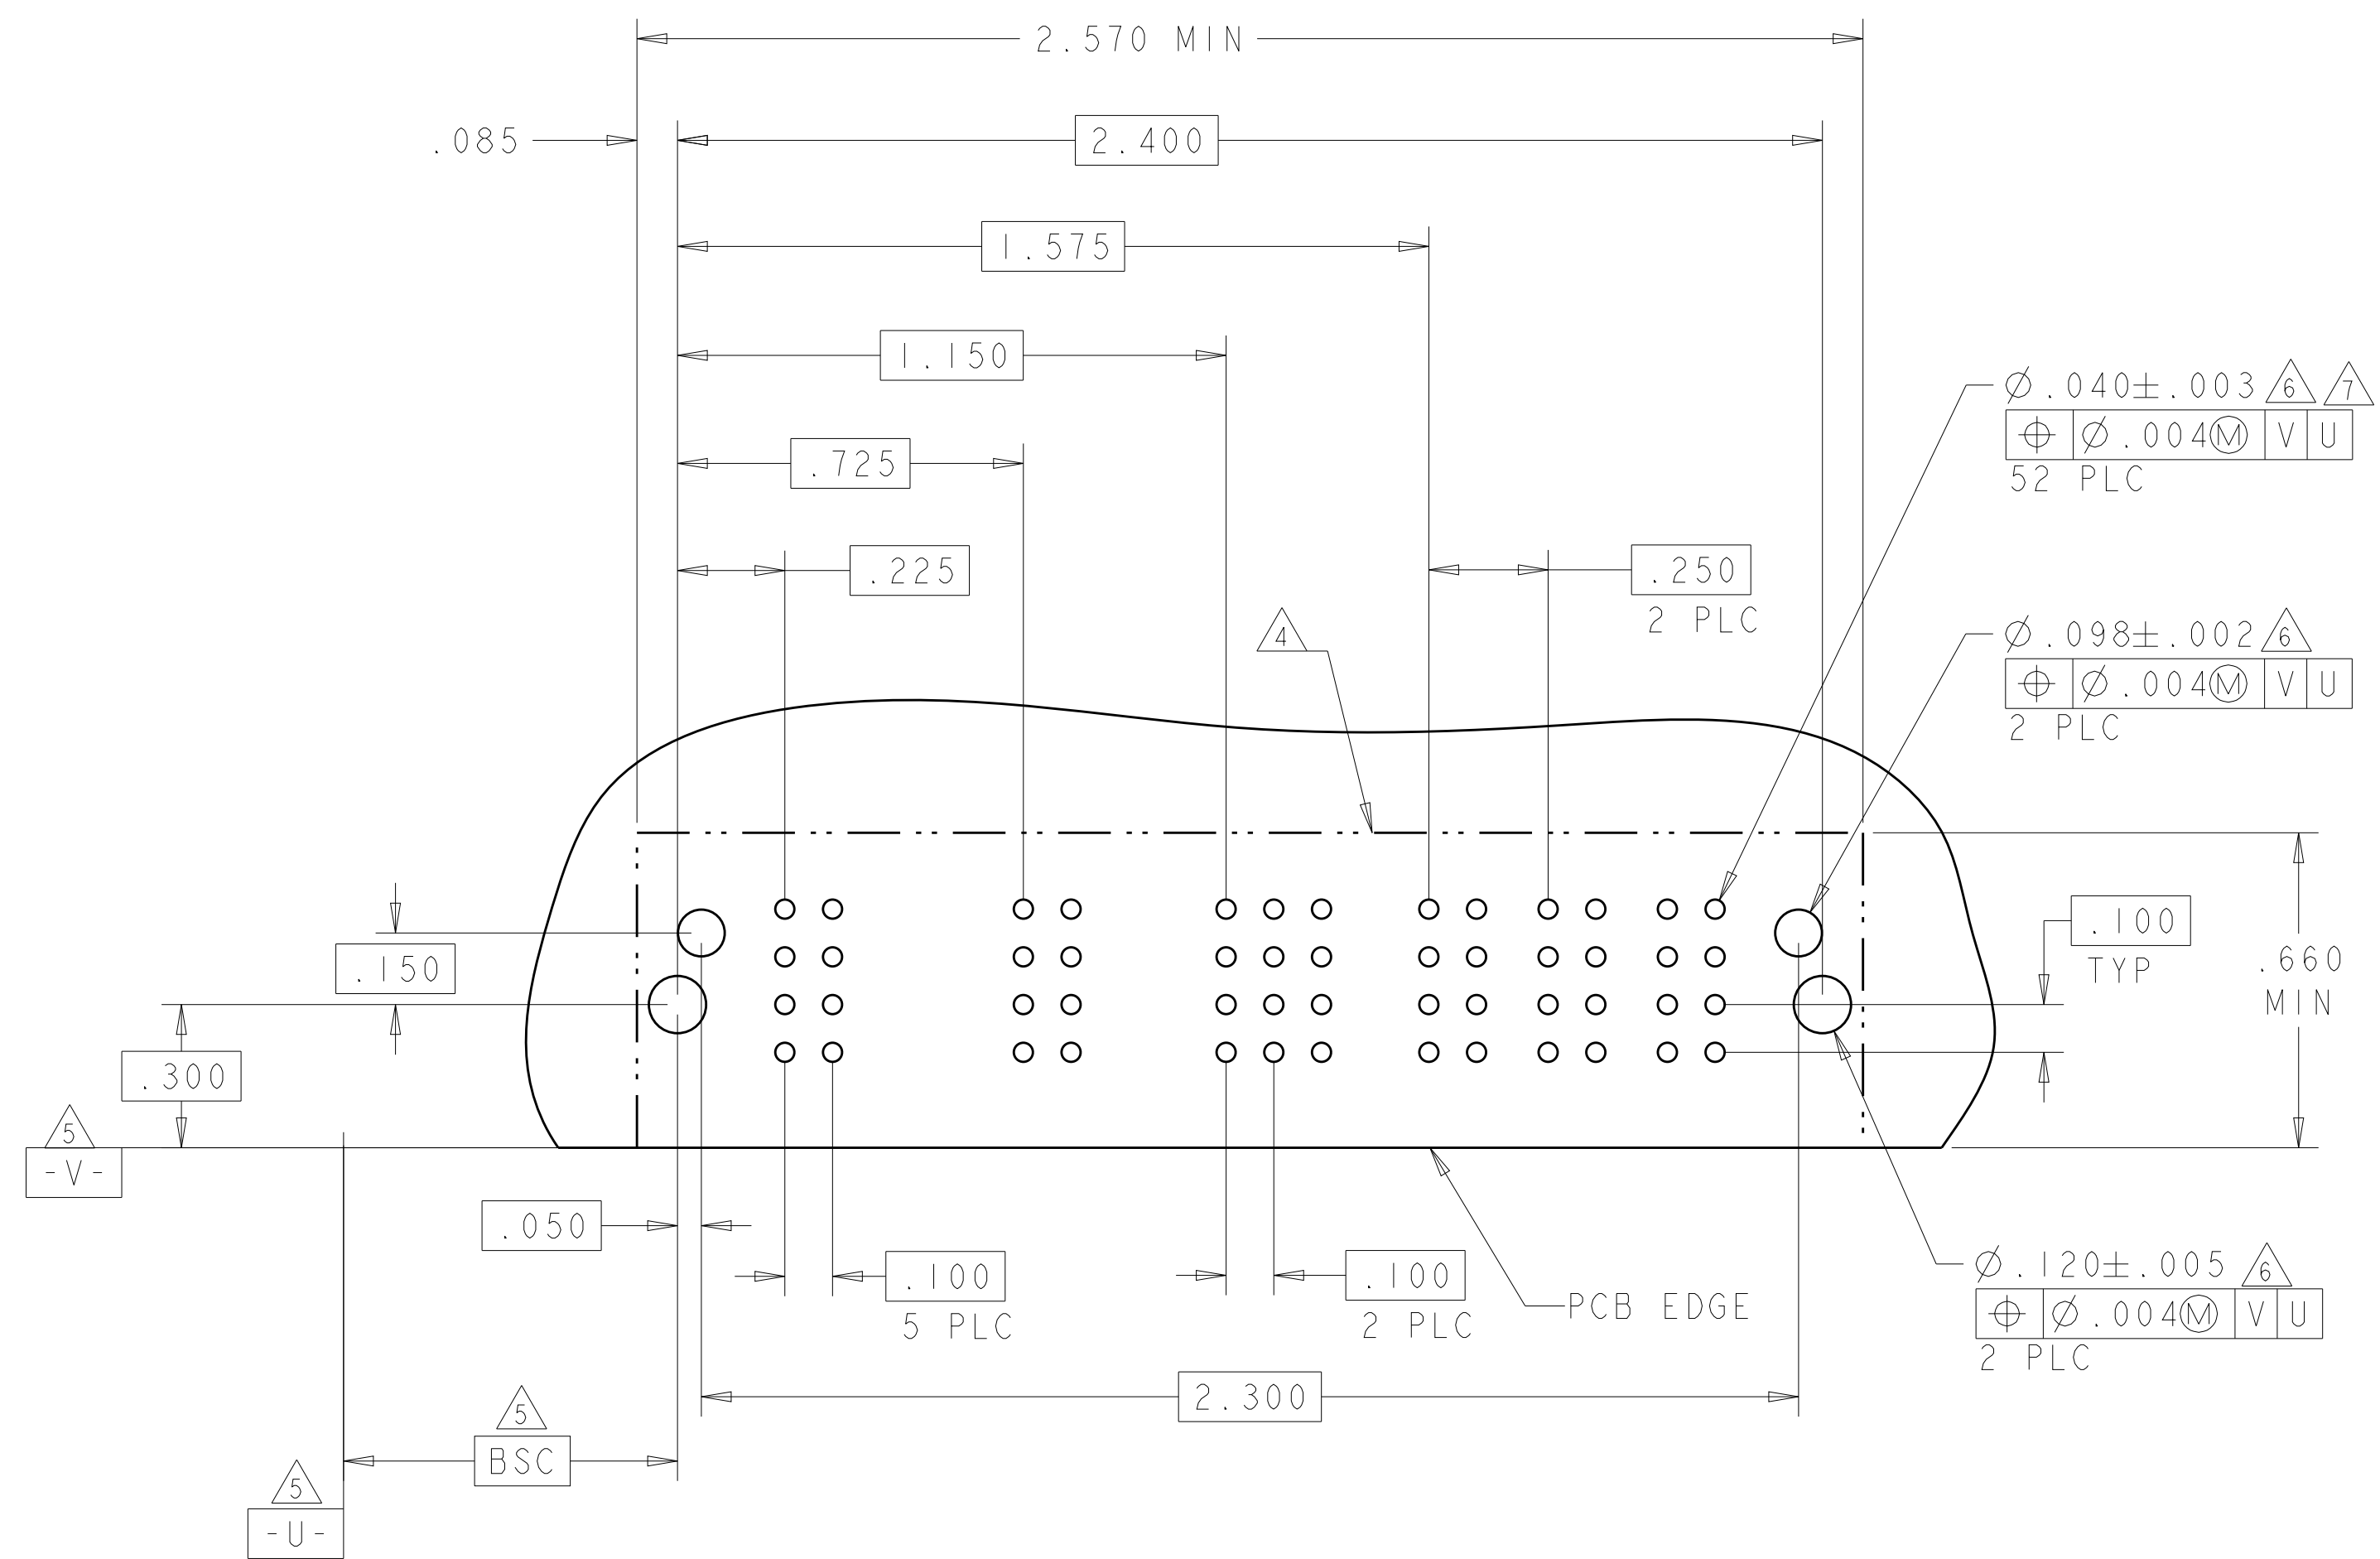[illegible]4805 (3/11)


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P1	P2	1	2	3	4	P3	P4	
4-6450830-6	D C B A				J	J	J	J			
					FK	FK	FK	FK			
					G	G	G	G			
					S	S	S	S			
2P + 16S + 2P											

PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P1	P2	1	2	P3	P4	
4-6450830-7	D C B A		LM	LM	F	J	TM	TM	
					K	E			
					N	N			
					S	S			
2LP + 8S + 2P			HD				HD		

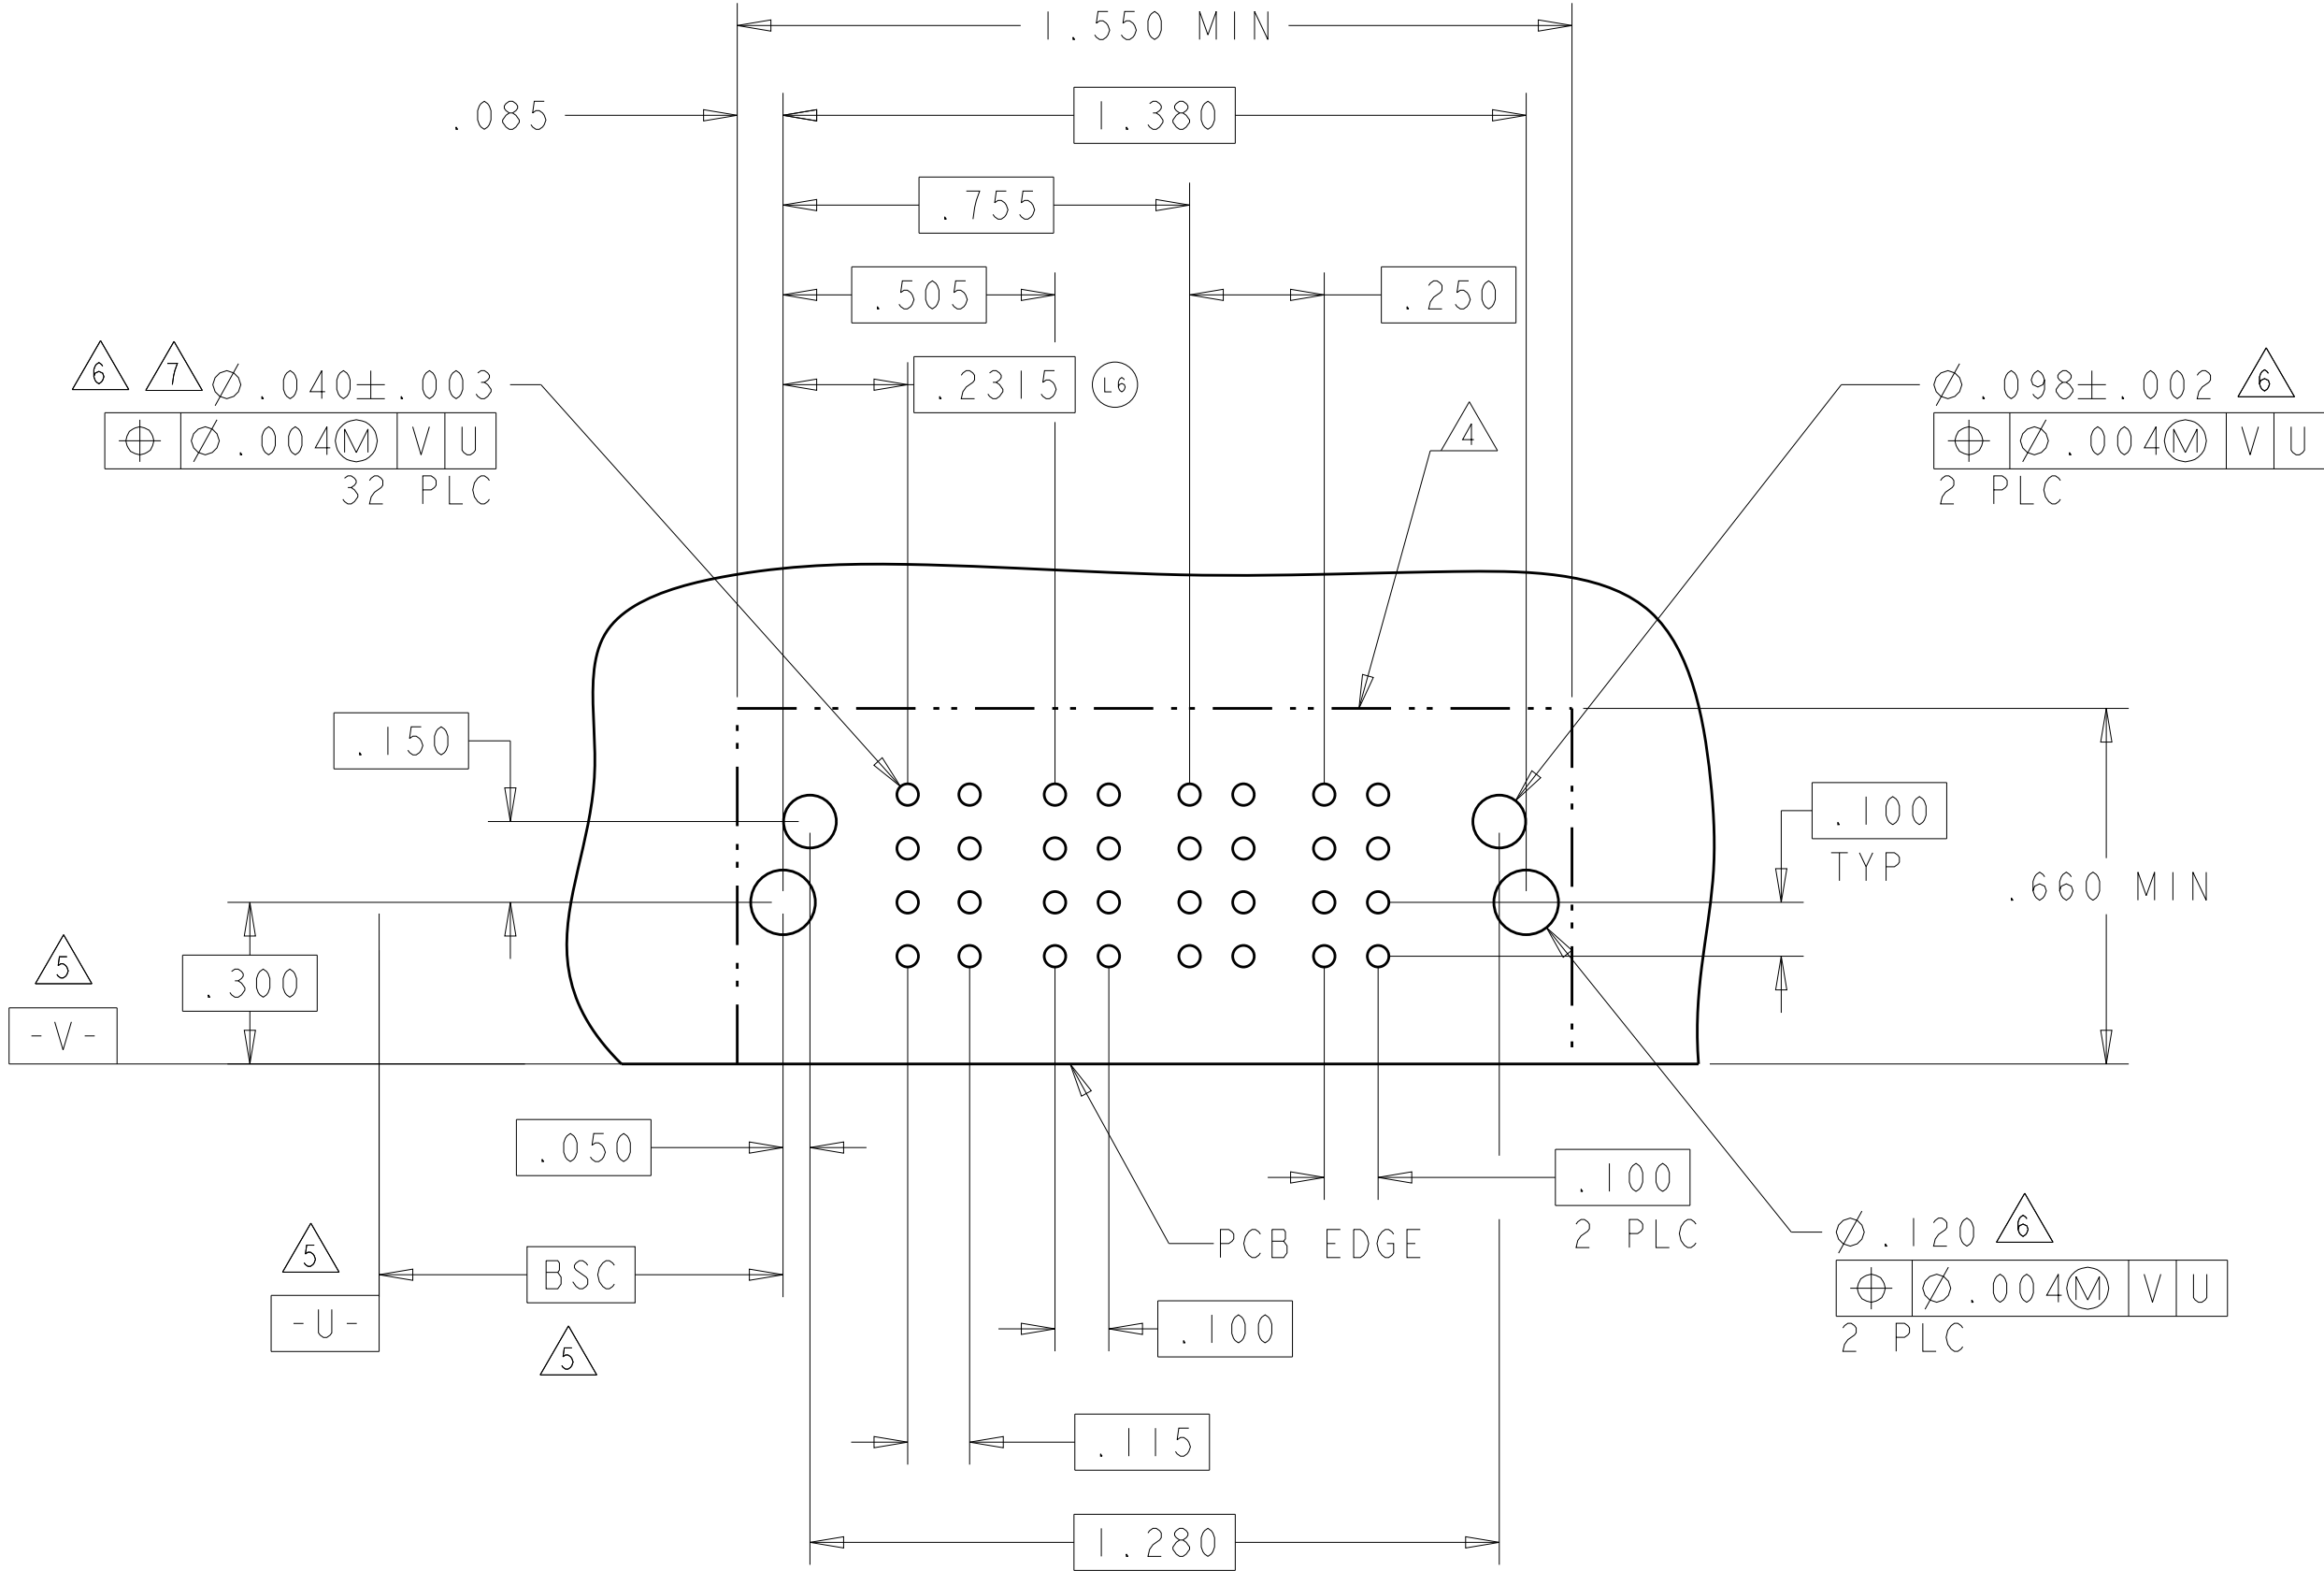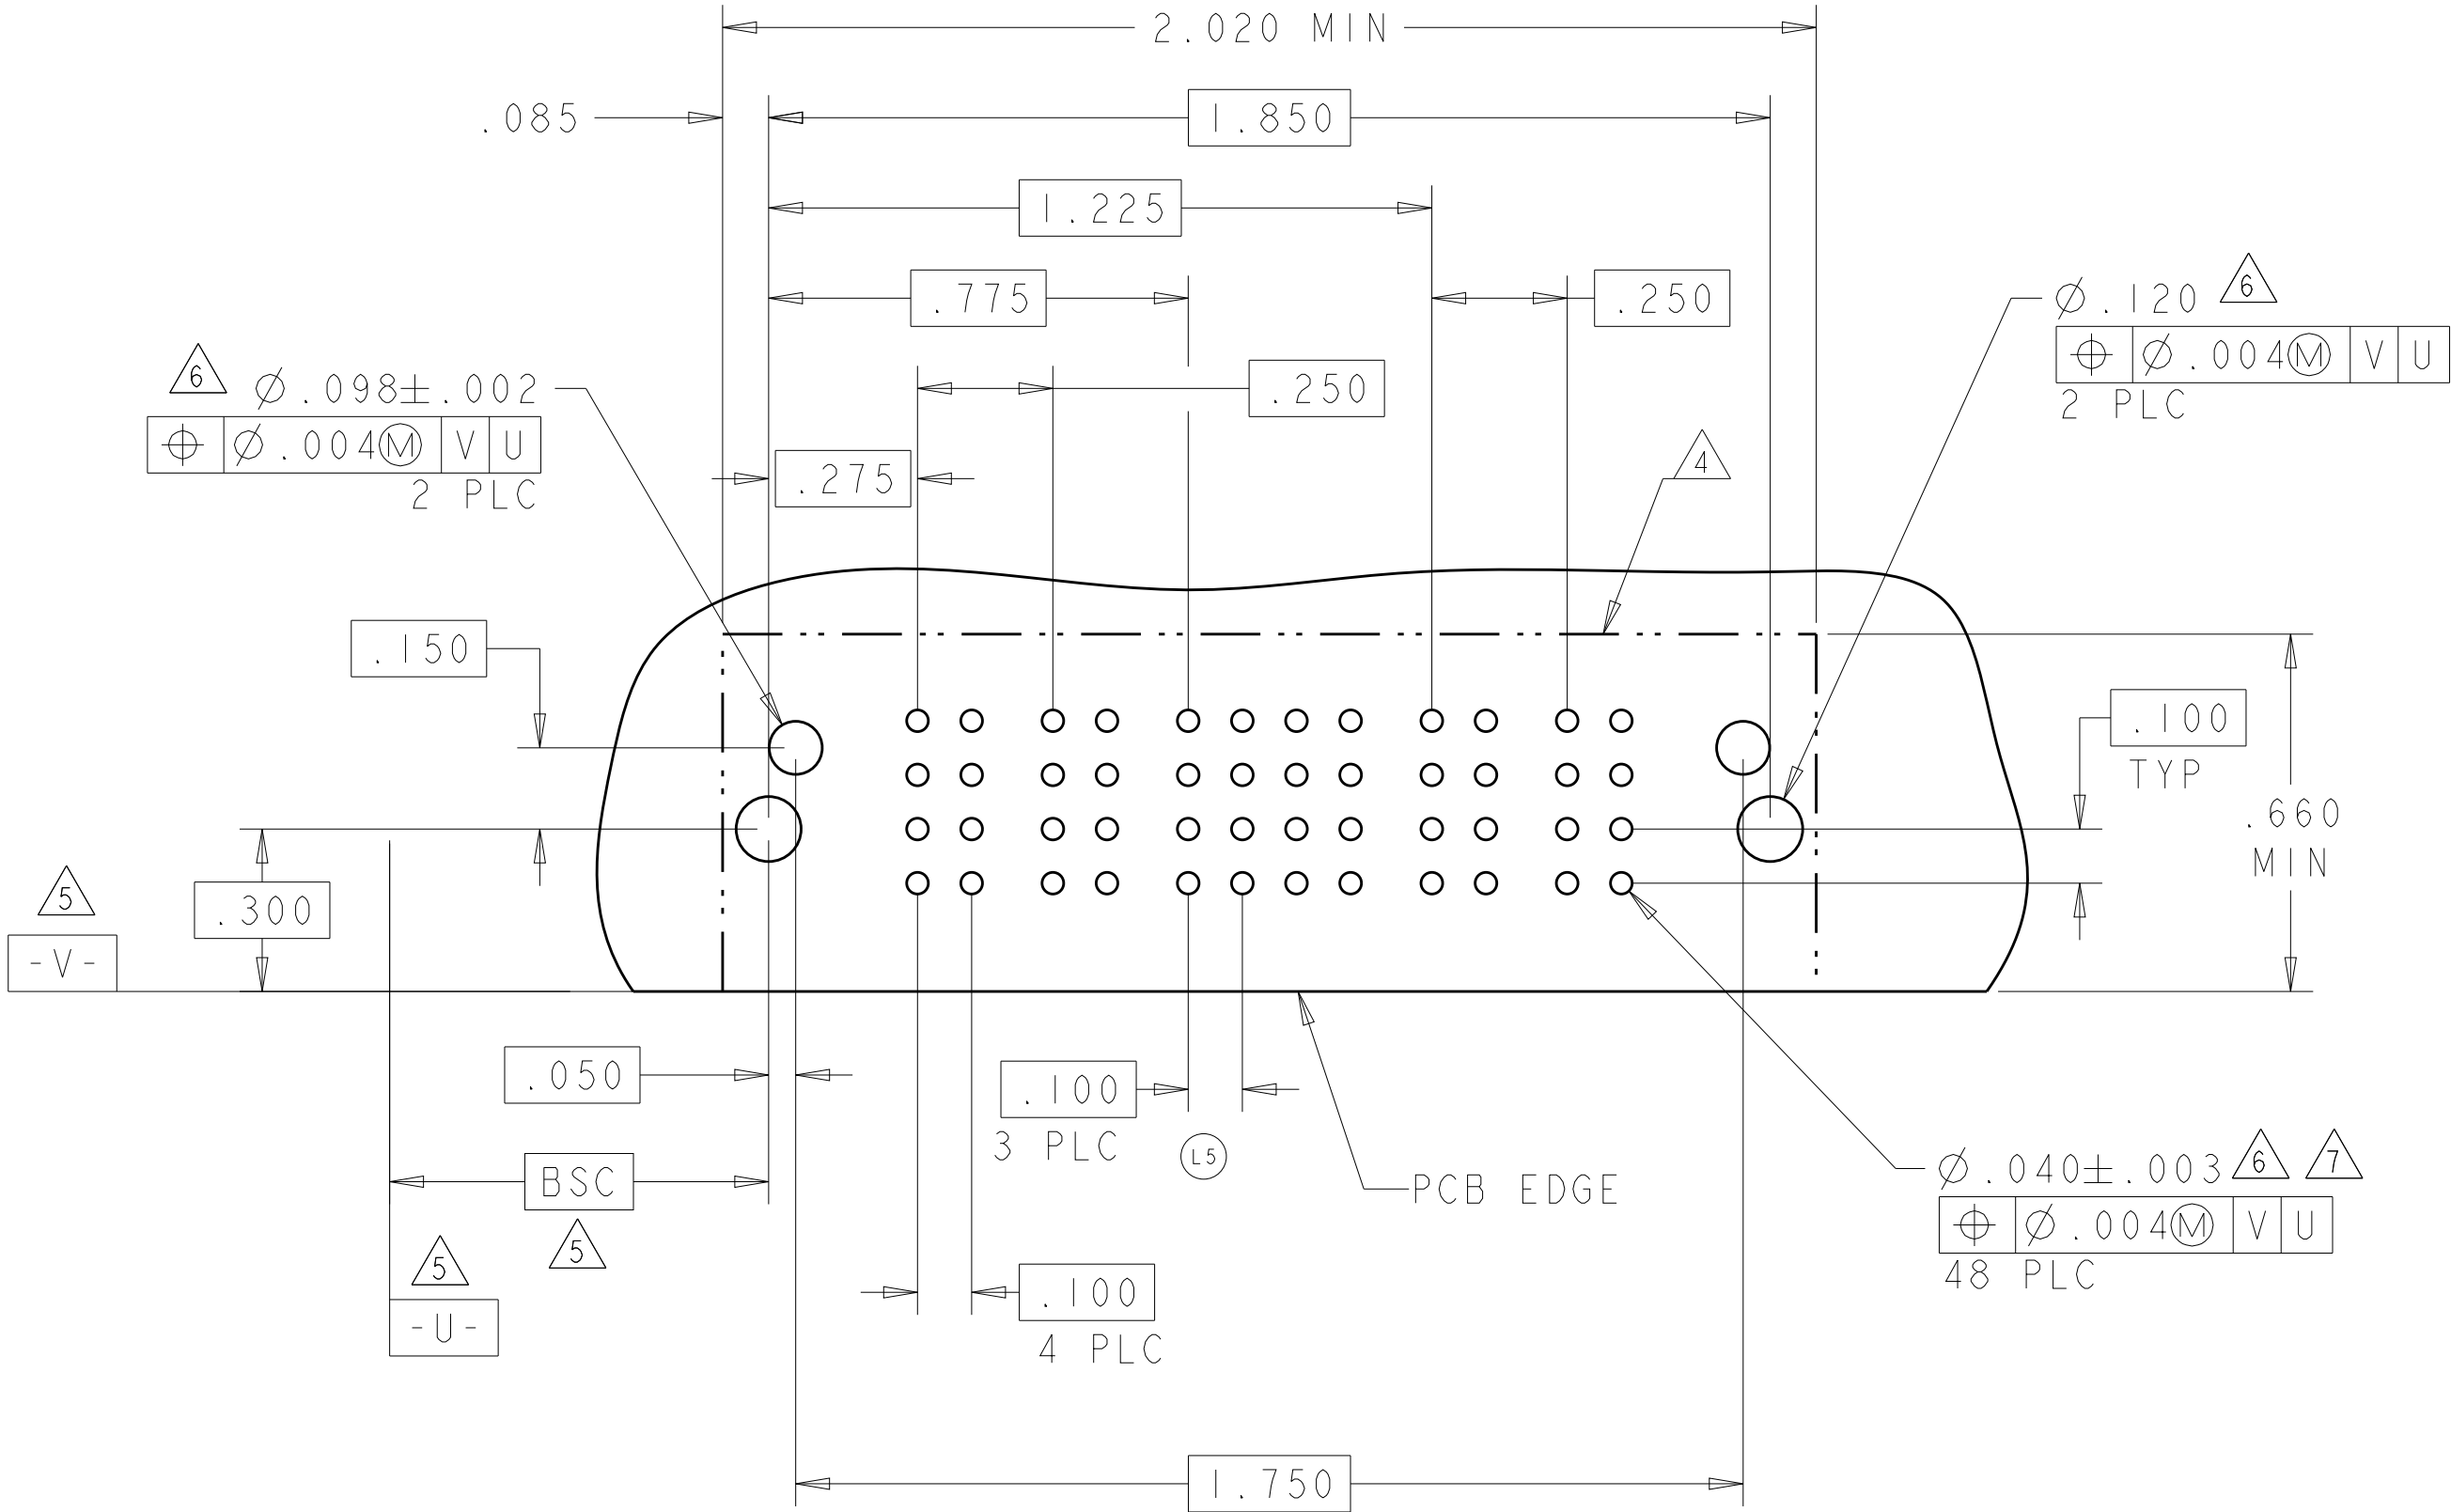



—NO CONTACT LOADED

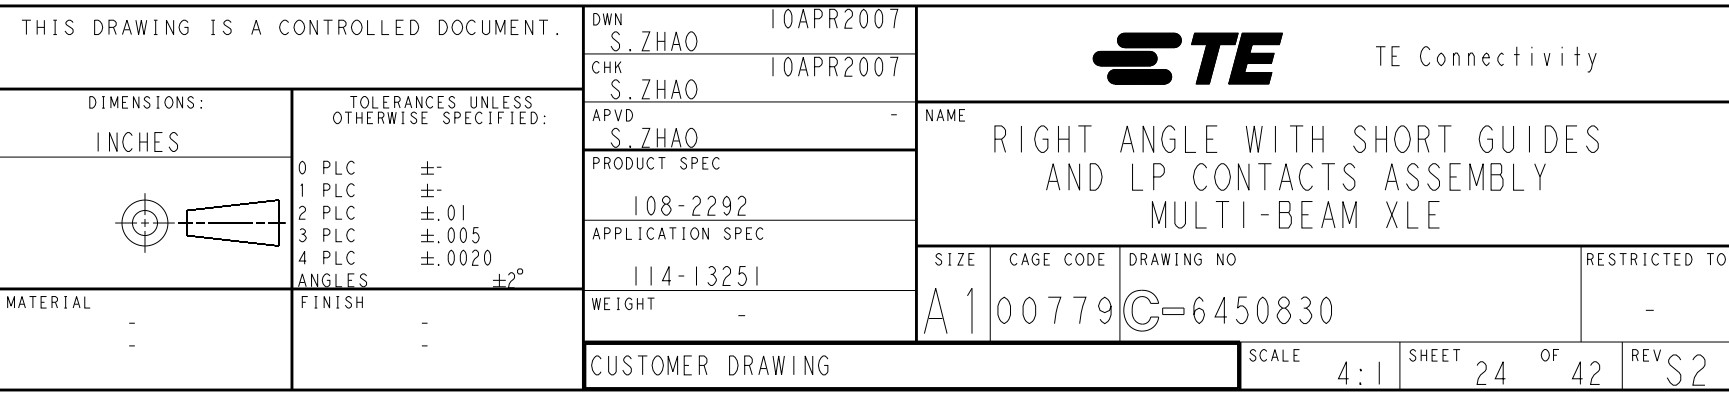

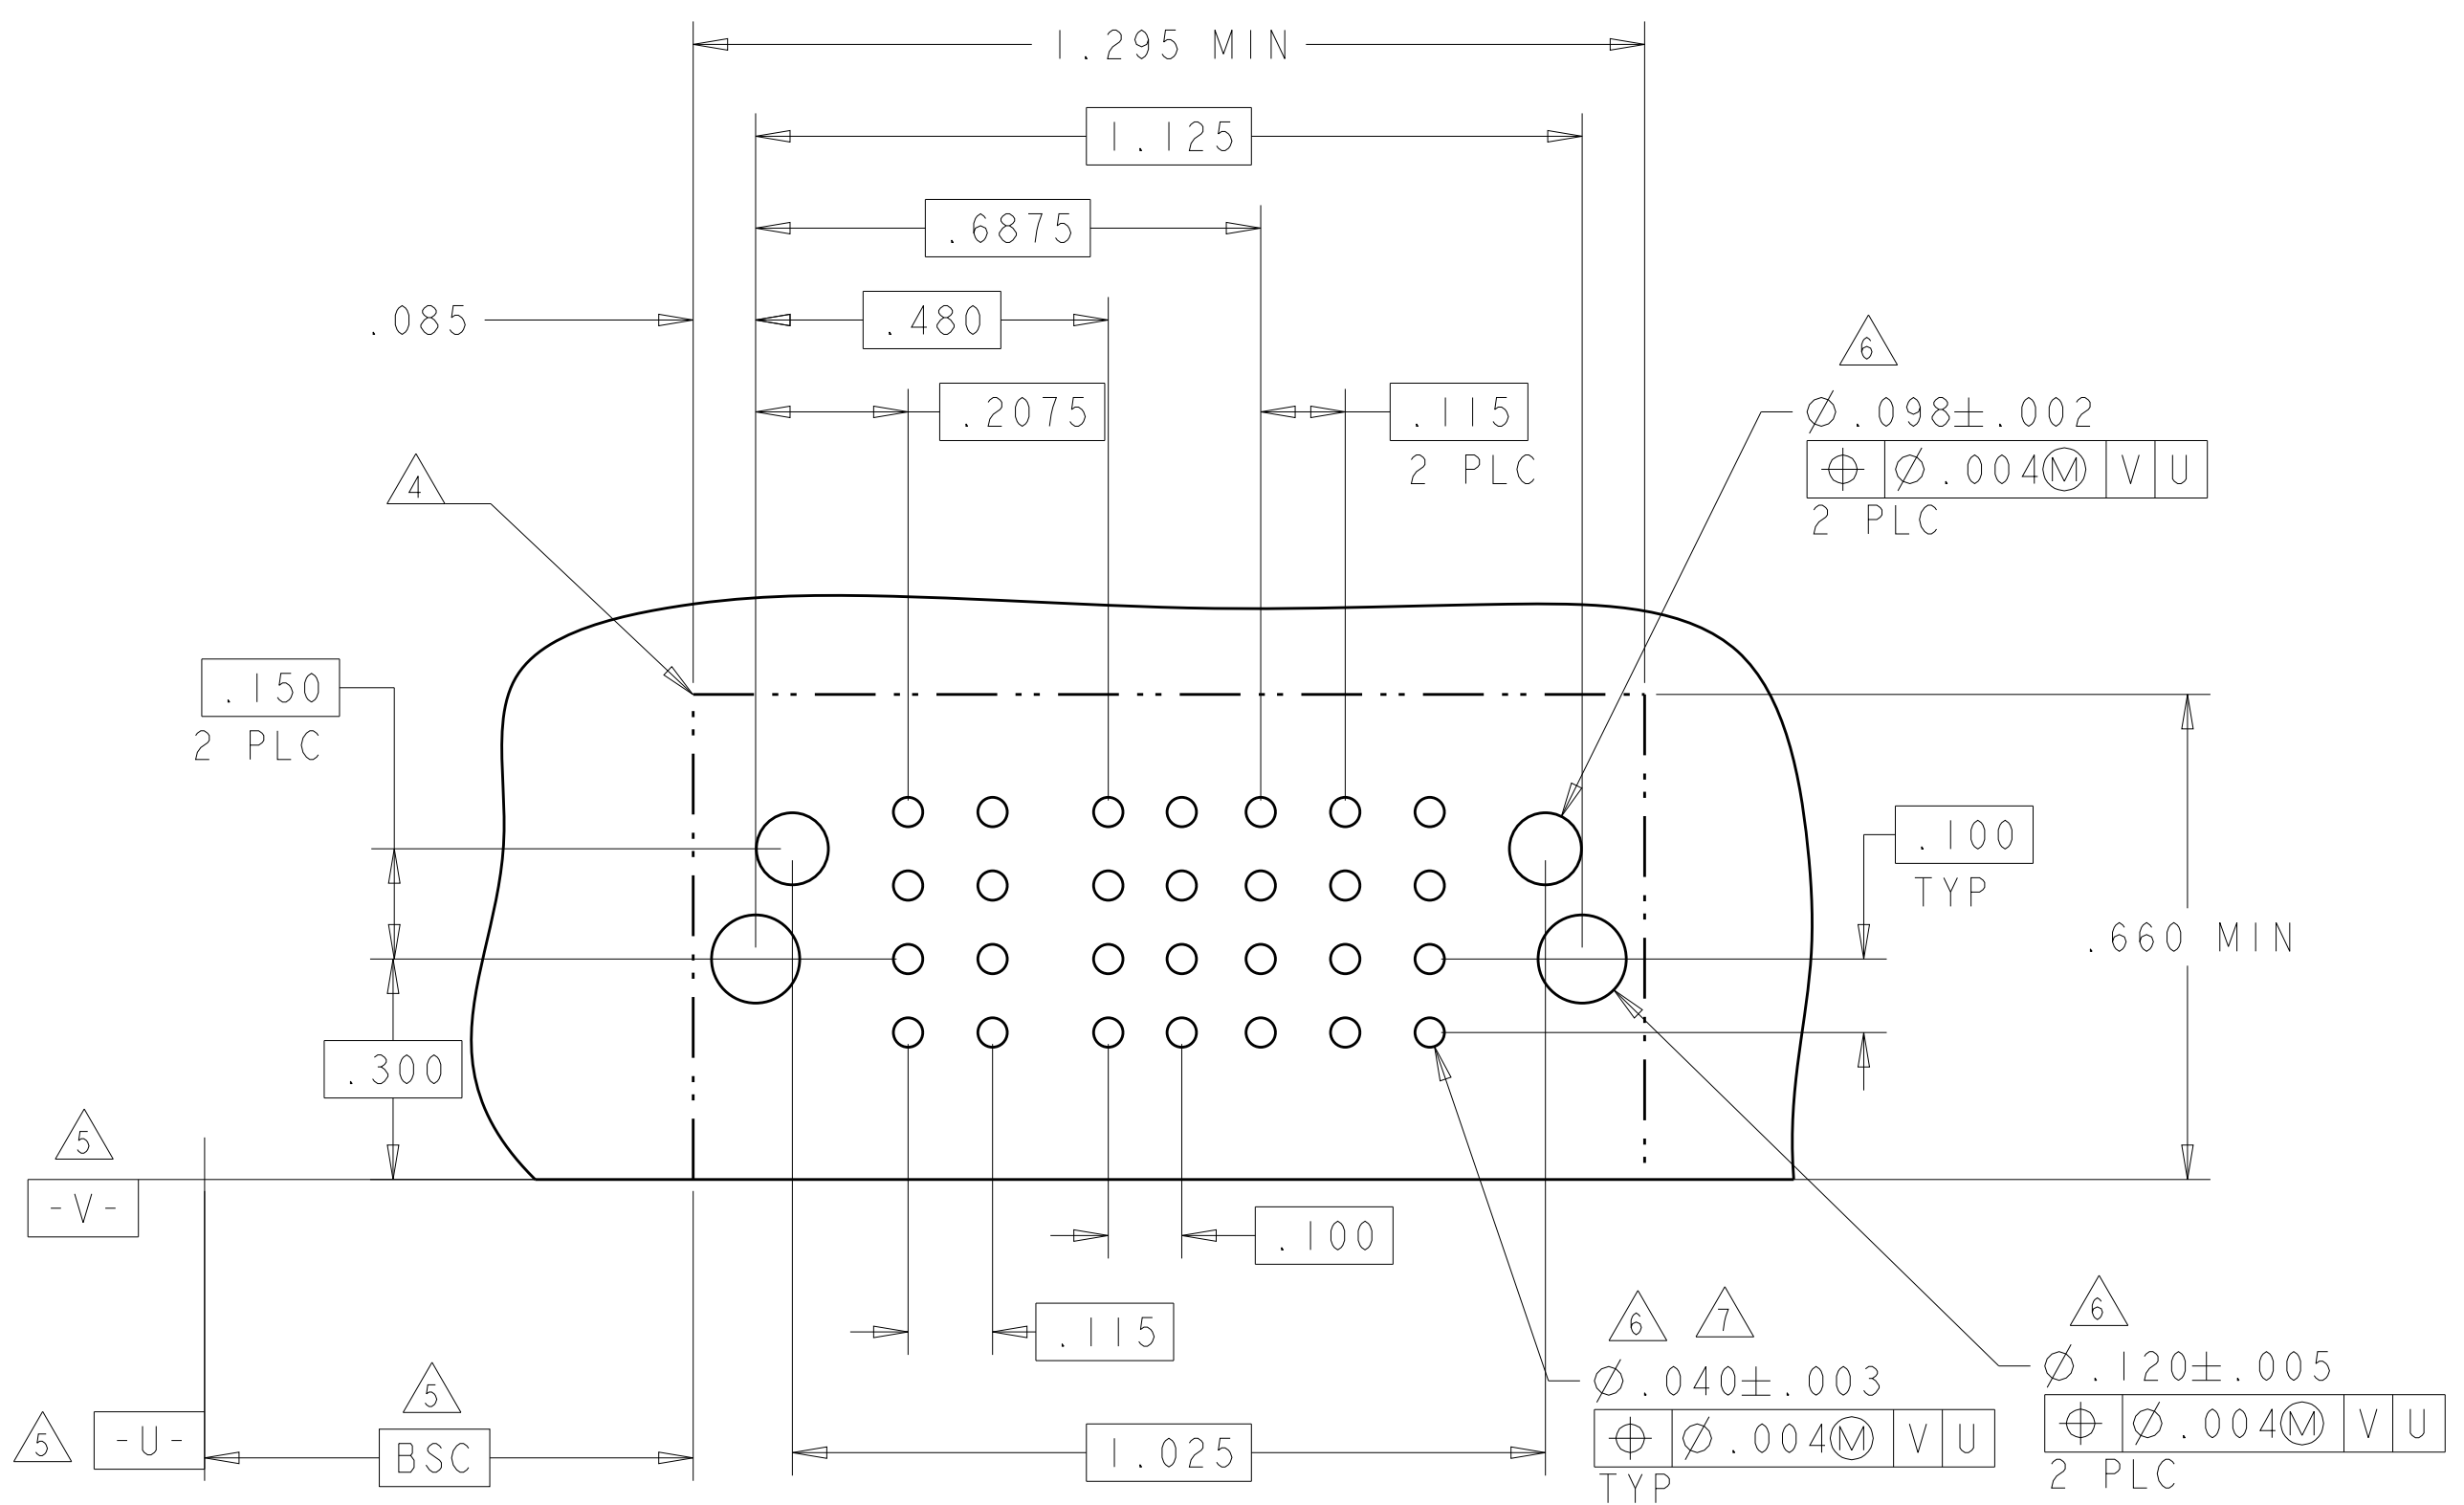[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL					POWER				
			P1	P2	P3	P4	1	2	3	4	5	P5	P6	P7	P8	
5-6450830-2	D		TM	TM	TM	TM	J	J	J	J	J	TM	TM	TM	TM	
	K						K	K	K	K						
	N						N	N	N	N						
	H						S	S	S	S						
	A	HD														
4P + 20S + 4P																


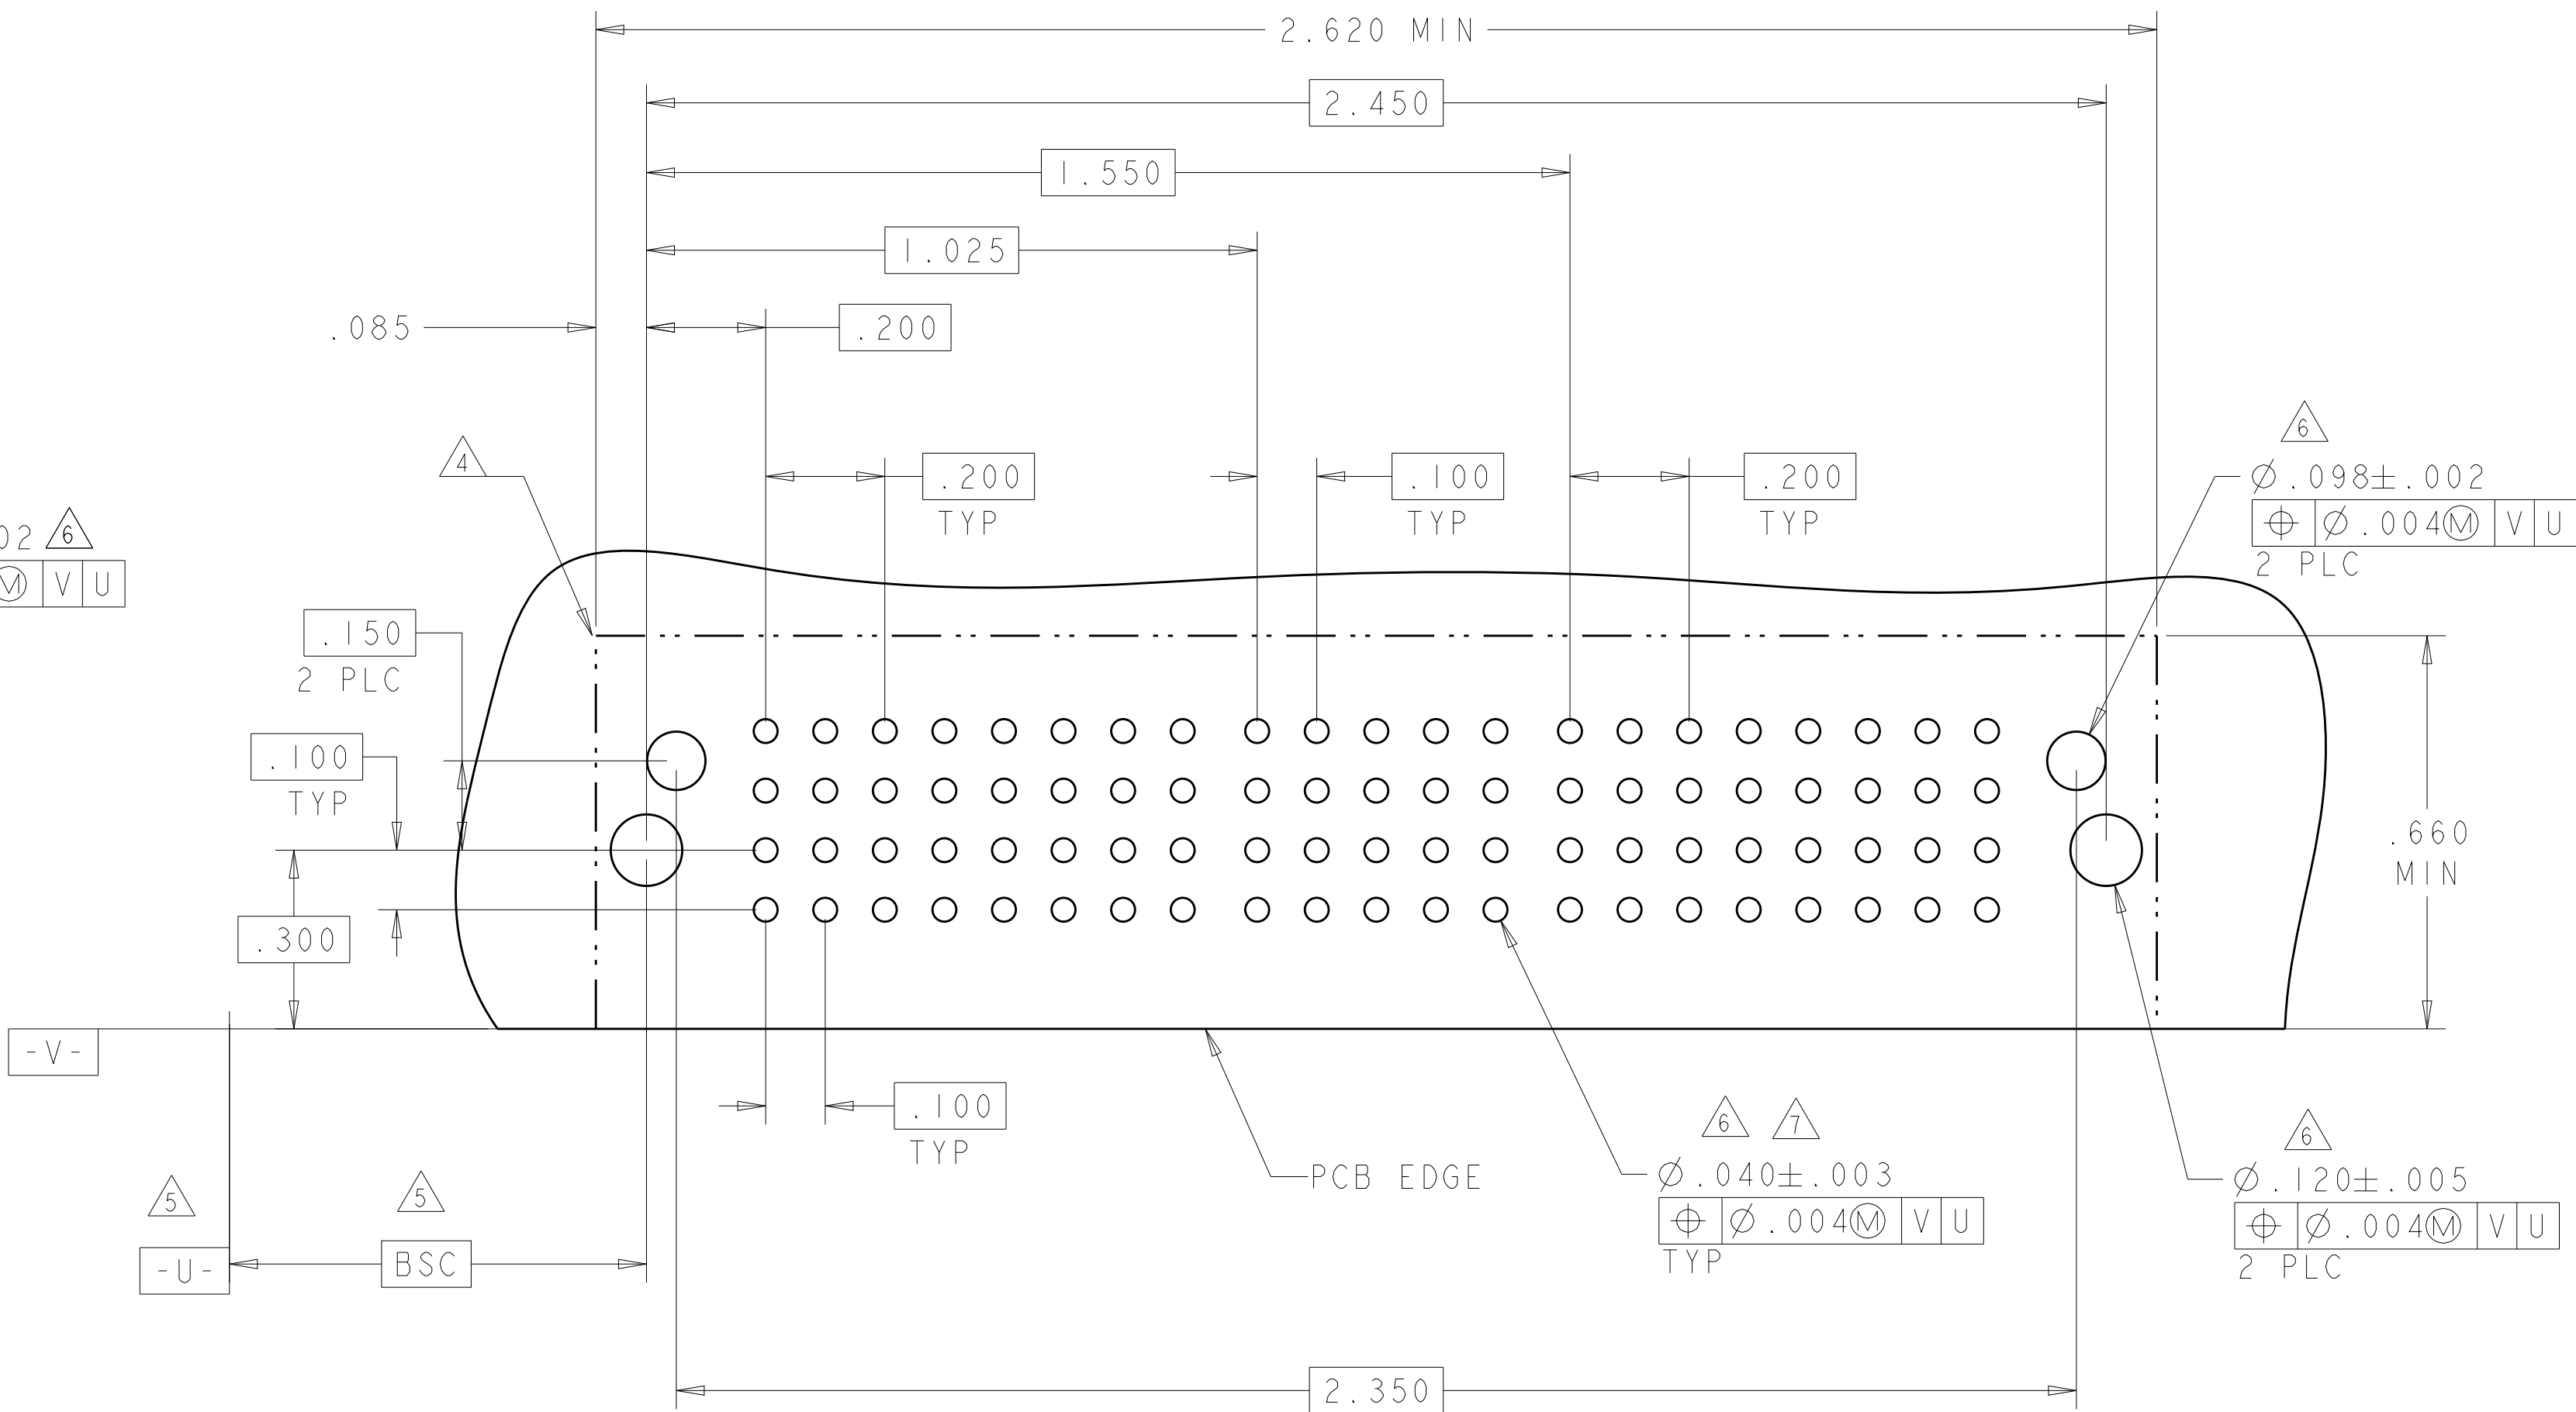
4805 (3/11)

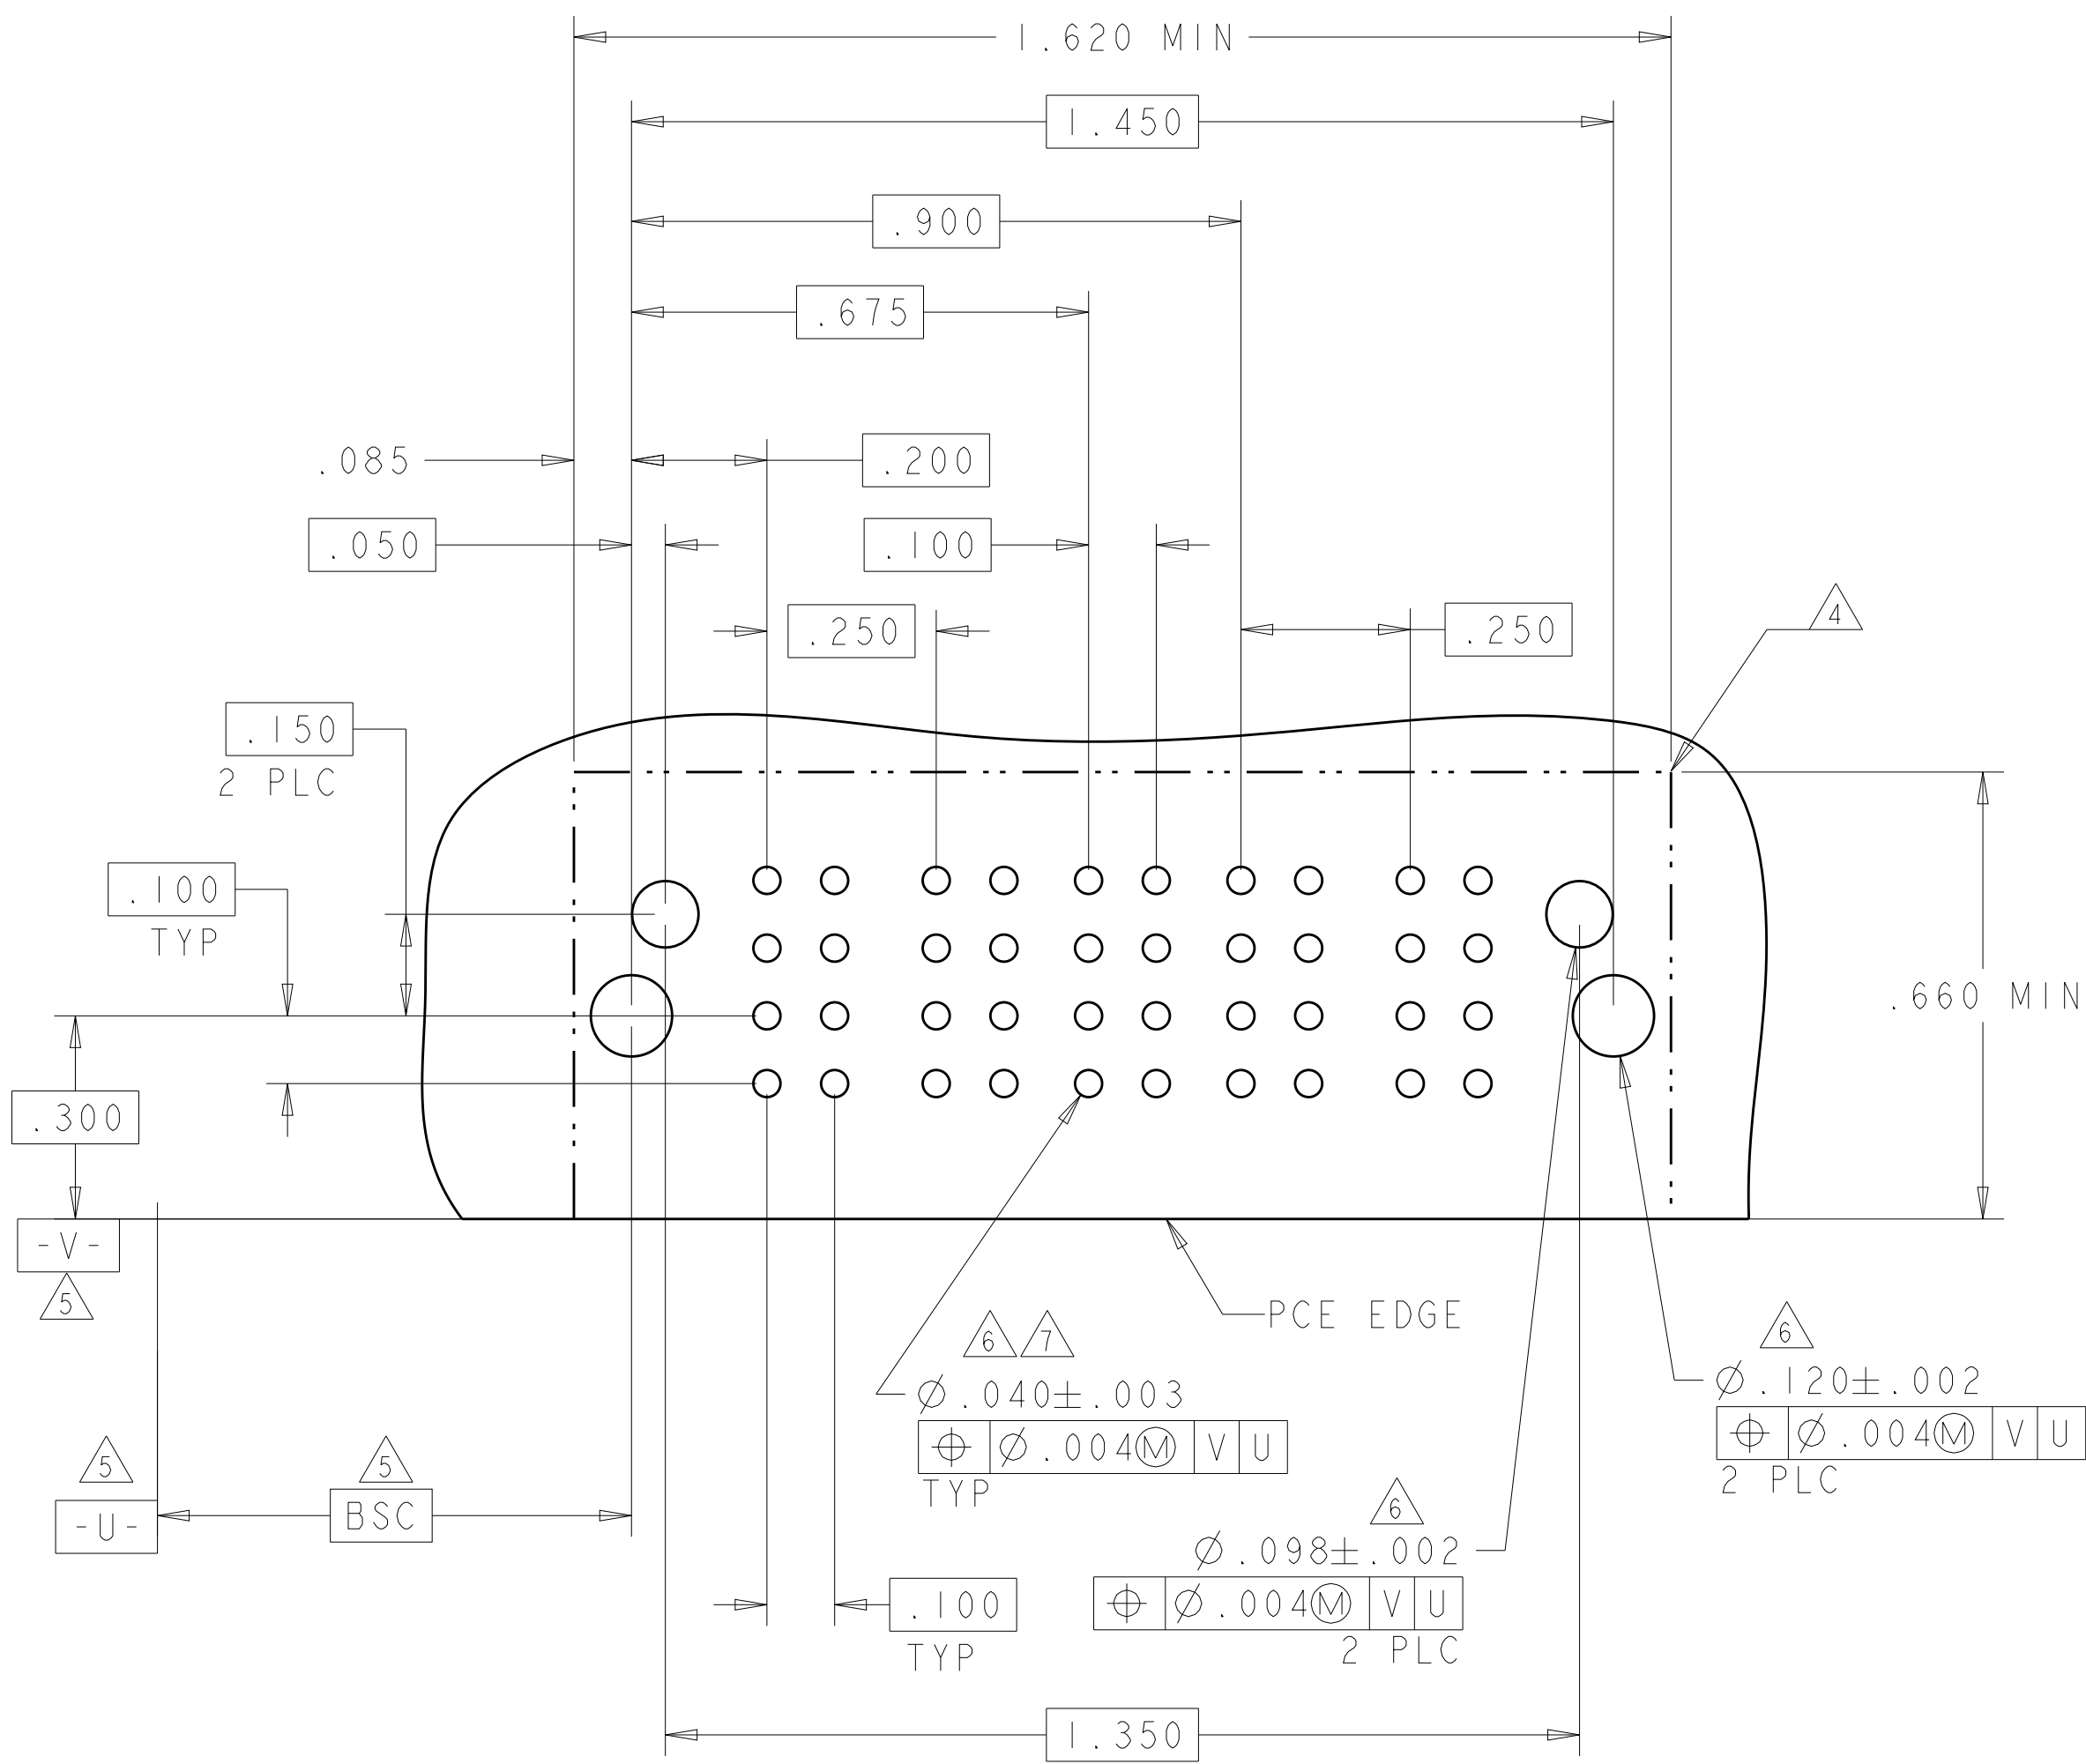[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER						SIGNAL			POWER		
			P1	P2	P3	P4	P5	P6	1	2	3	P7	P8	
5-6450830-5	D		TM	TM	TM	TM	TM	TM	J	J	J	LML	LML	
	C								K	K	K			
	B								N	N	N			
	A								S	S	H			
3ACP+3P+12S+2LP			8											

PART NUMBER	ROWS		POWER			SIGNAL				POWER					
			P1	P2	P3	1	2	3	4	P4	P5	P6	P7	P8	
5-6450830-6	D		TM	TM	TM	J	J	J	J	TM	TM	TM	TM	TM	
	C					K	K	K	K						
	B					N	N	N	N						
	A					S	S	S	S						
3ACP + 16S + 5P															HD

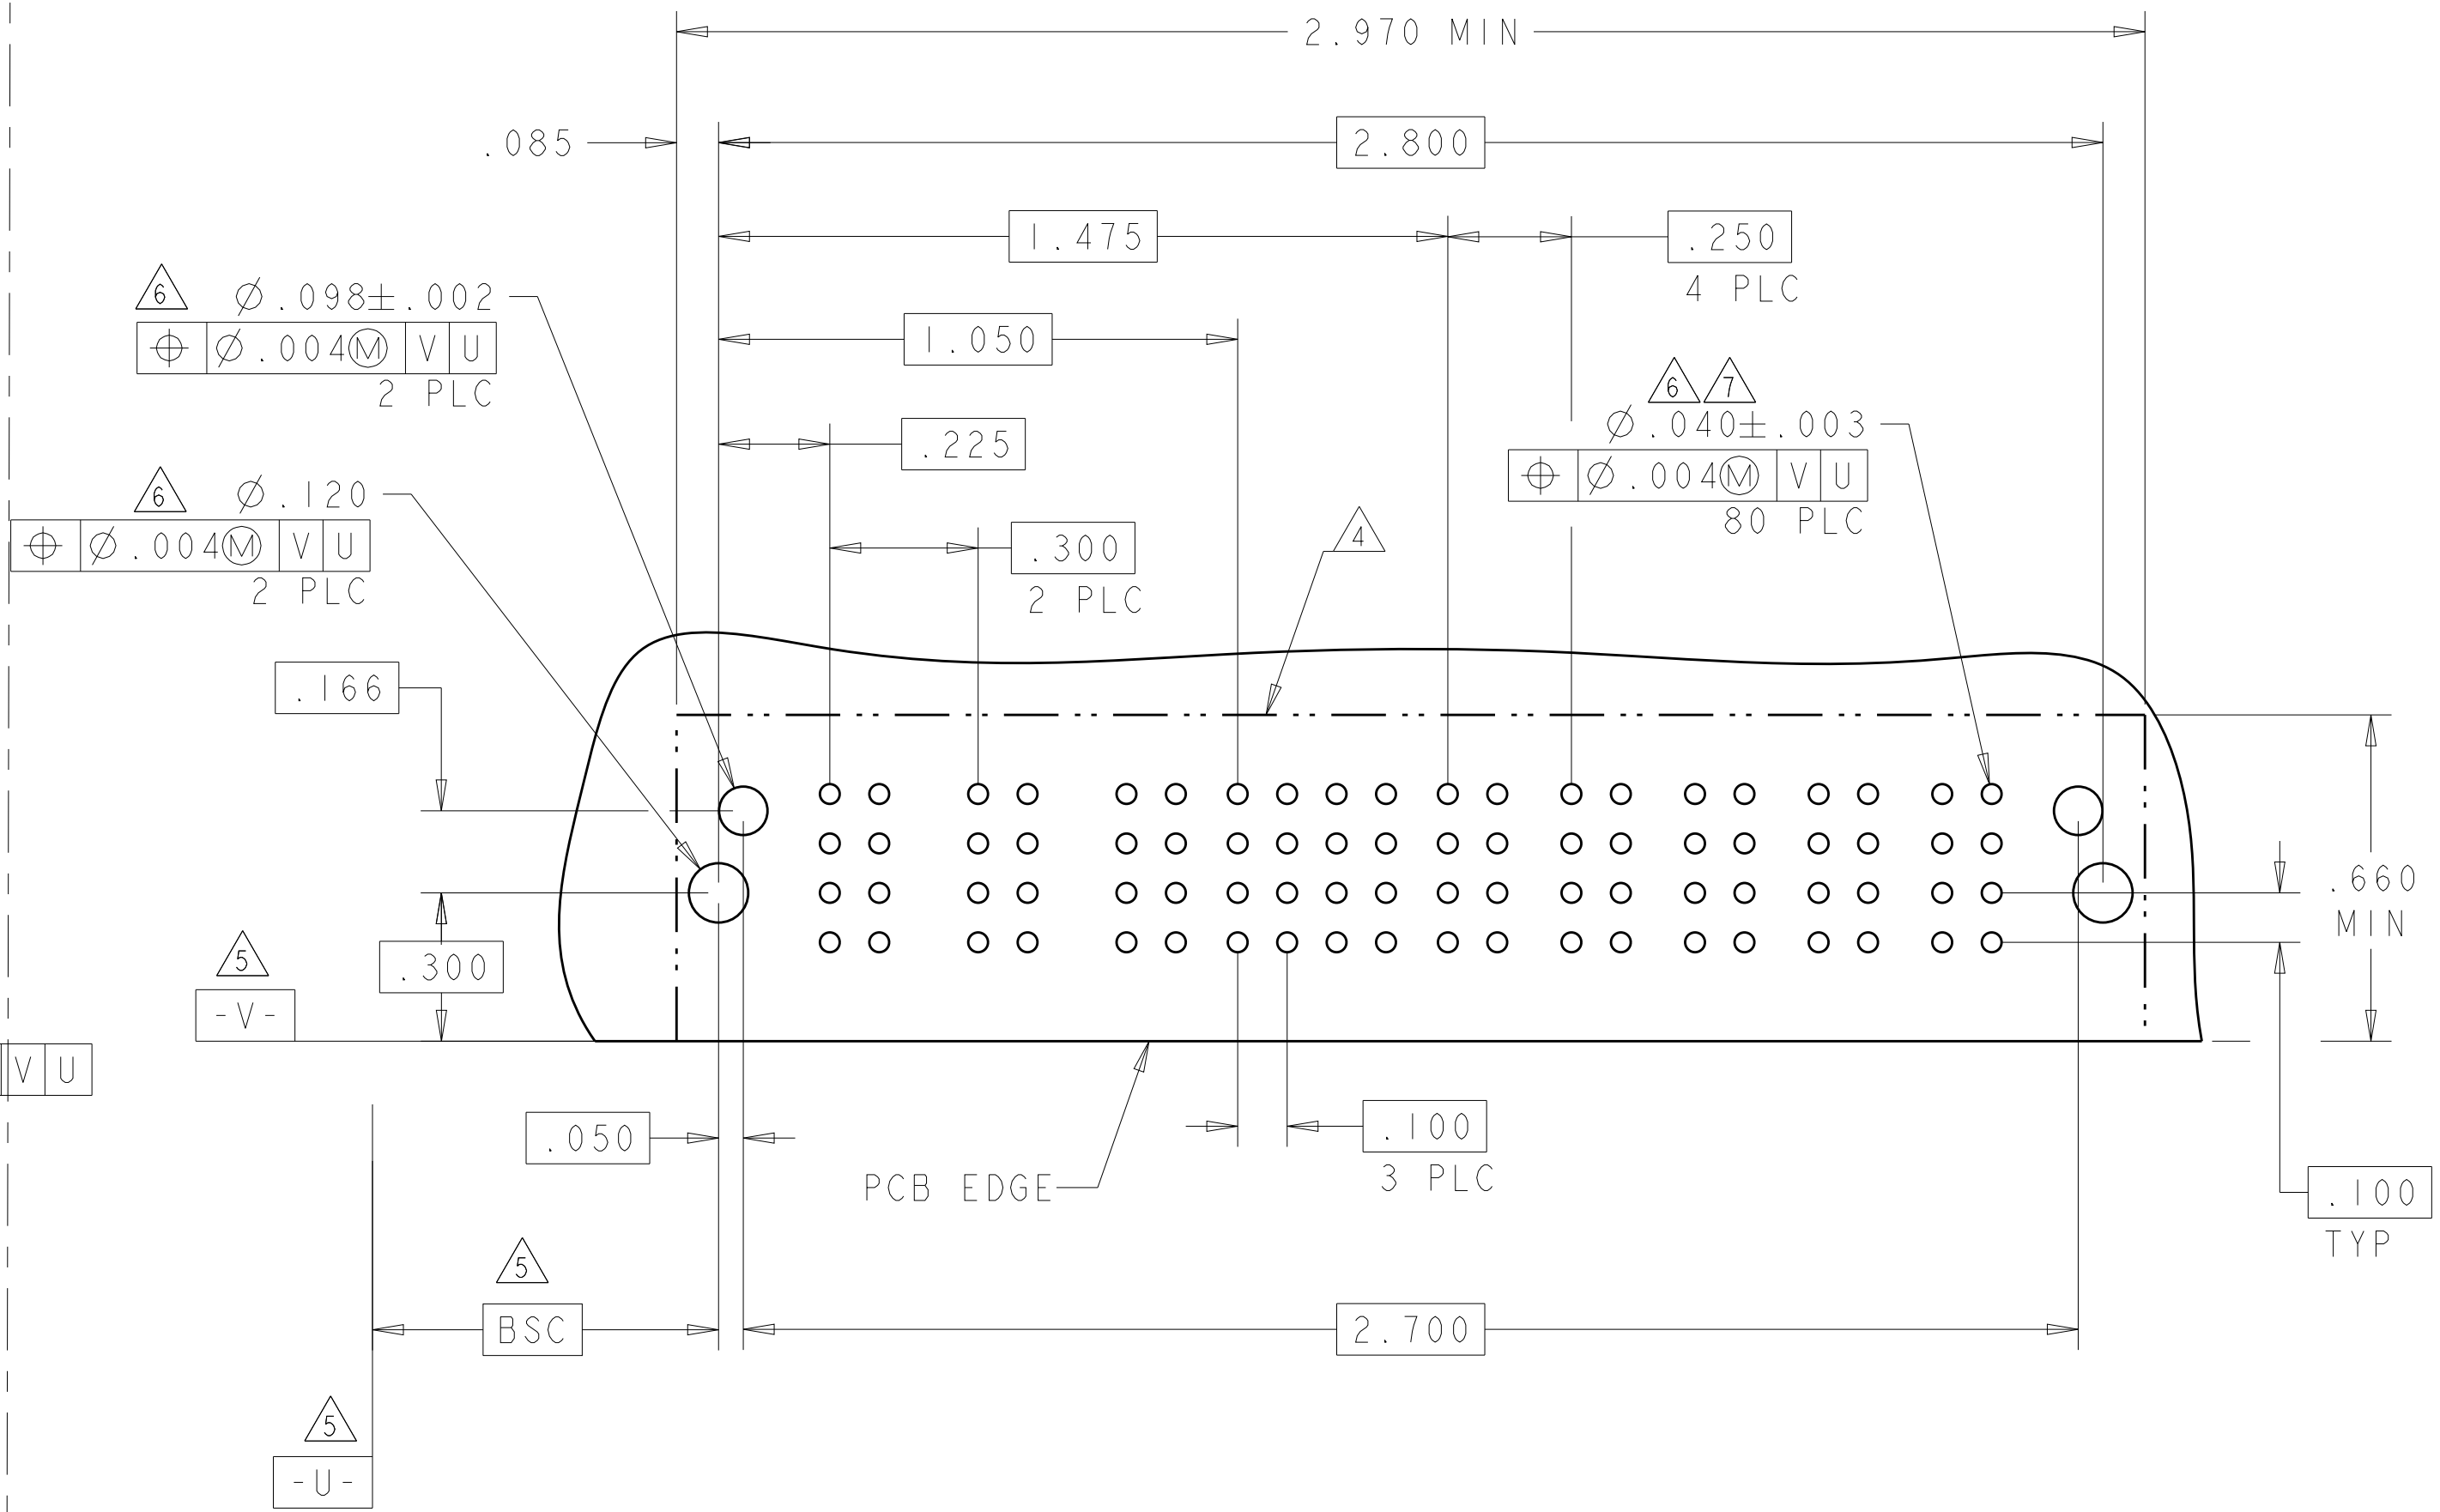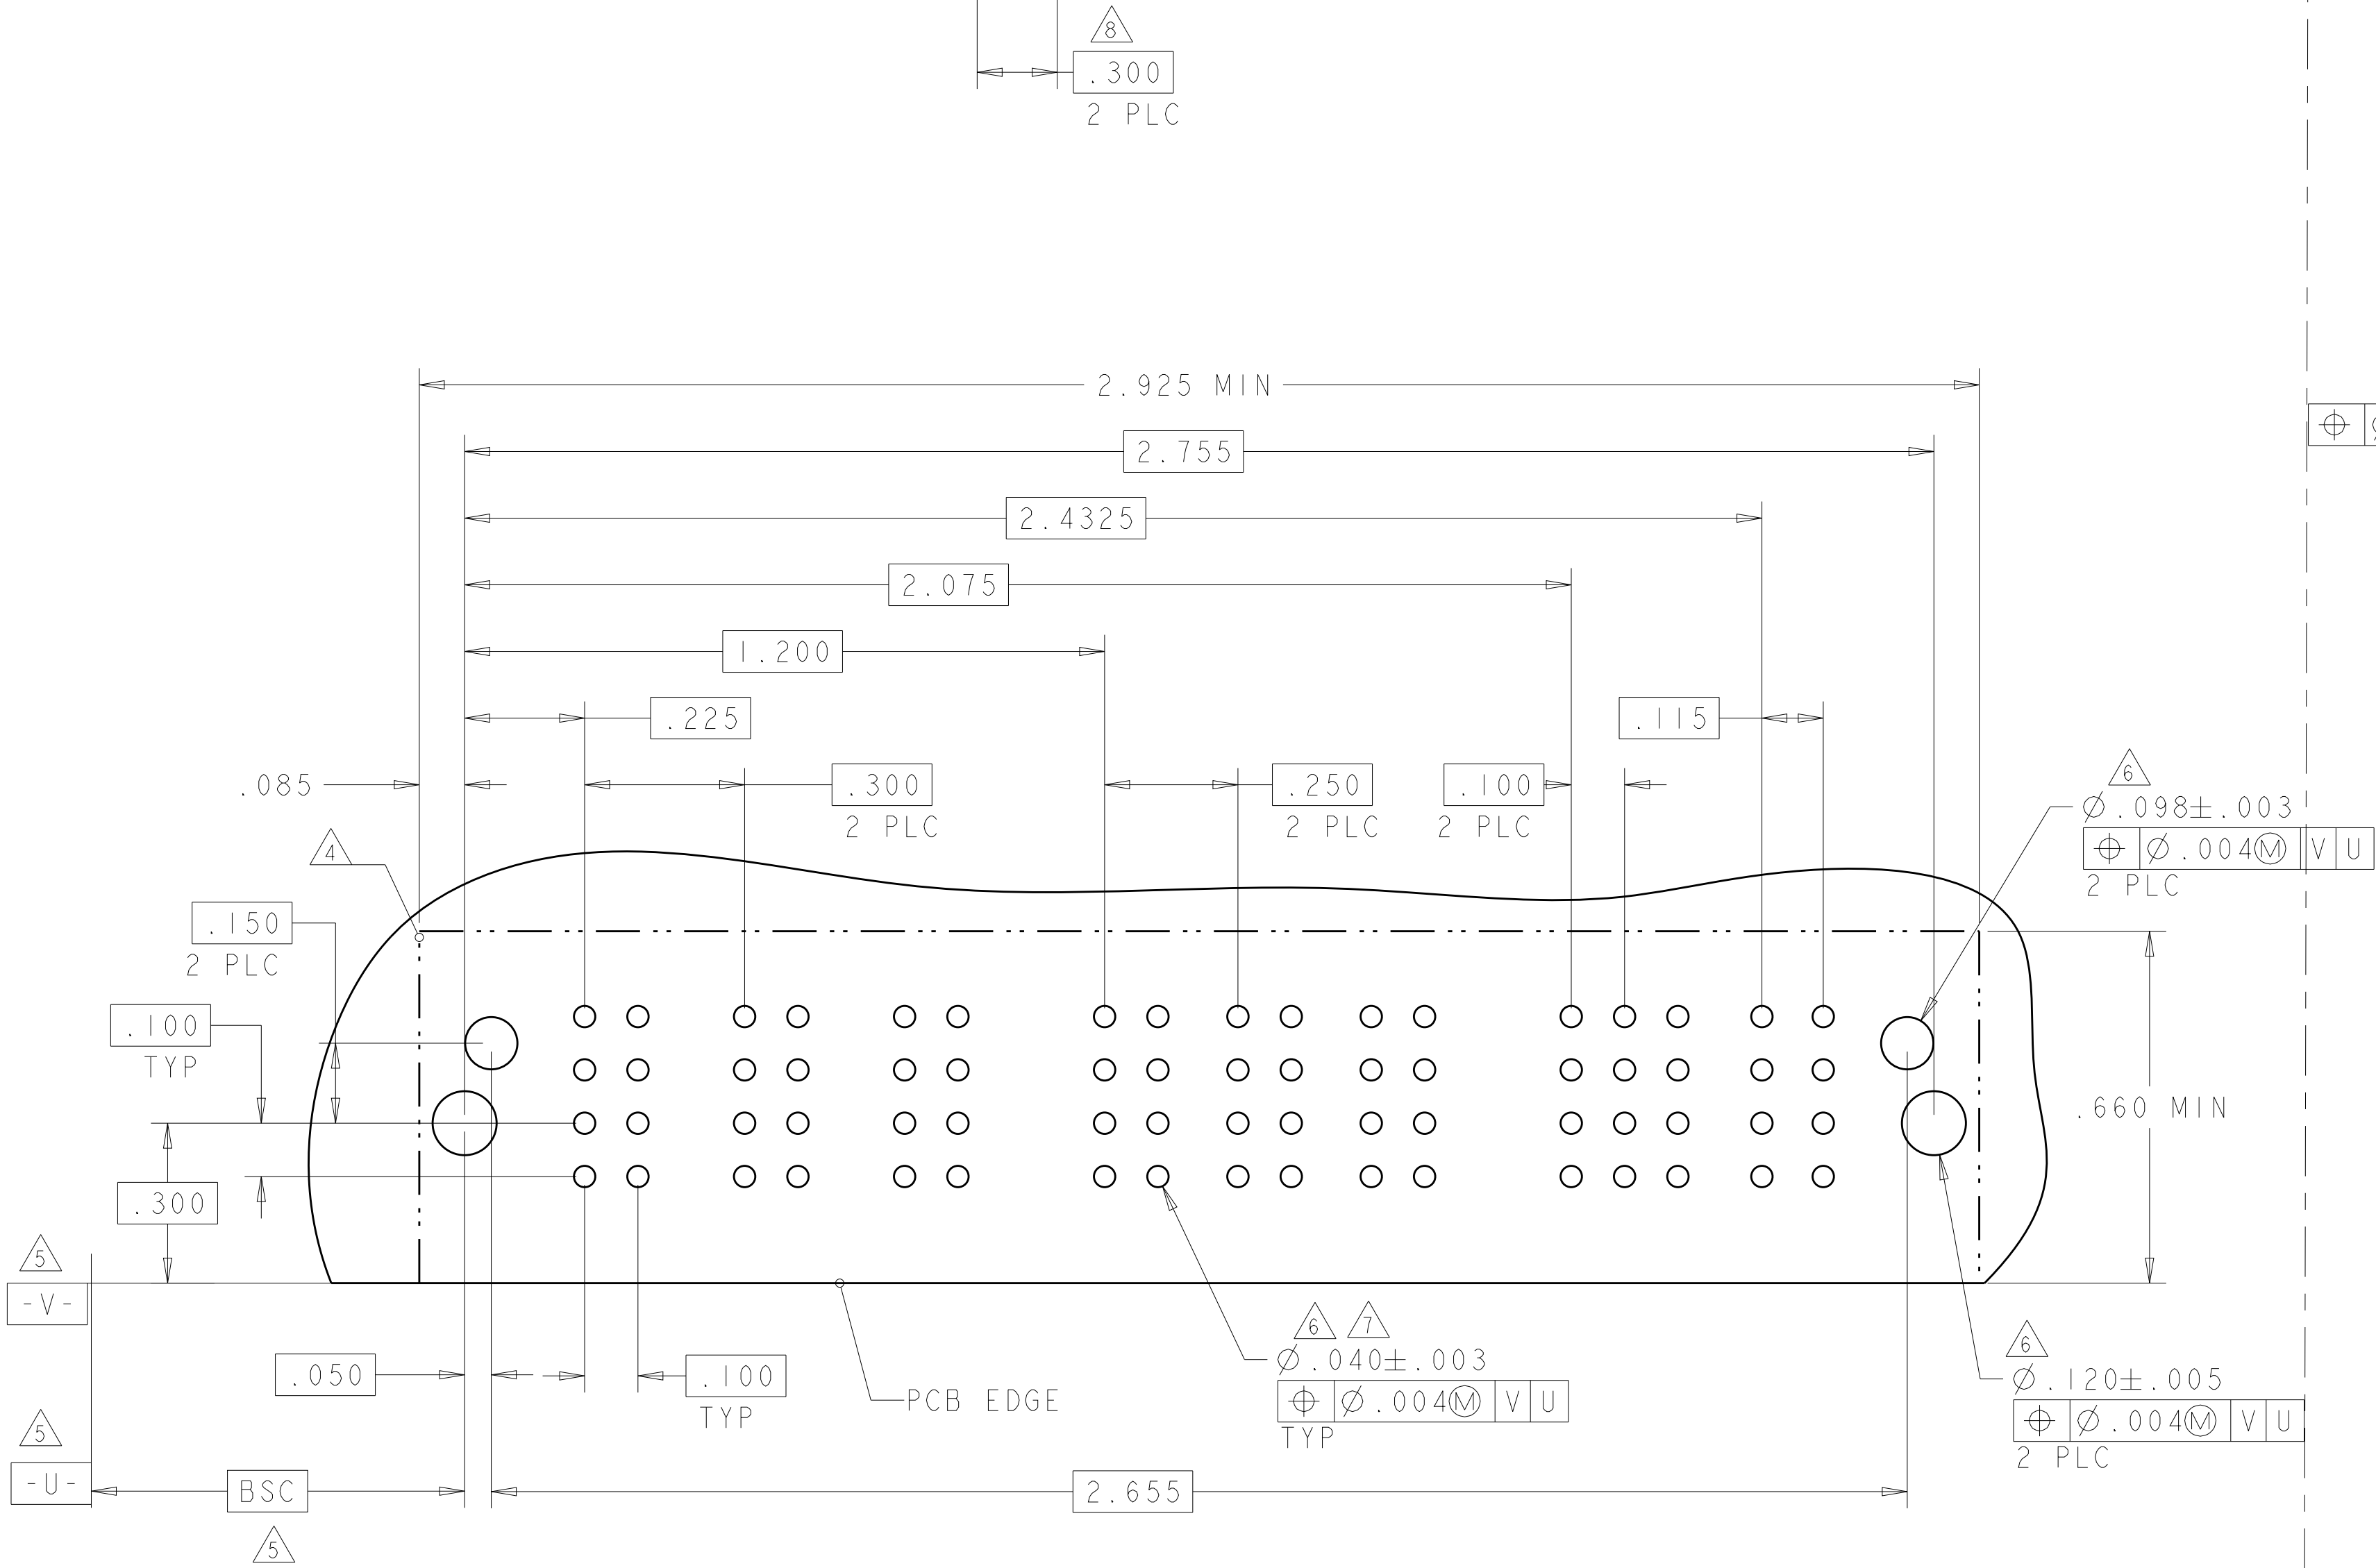


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-




PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
5-6450830-7	D		TM	TM	TM	TM	J	J	J	J	J	J	TM	TM	TM	TM	
	C						K	K	K	K	K	K					
	B						N	N	N	N	N	N					
	A						HD	S	S	S	S	S					
4P + 24S + 4P																	

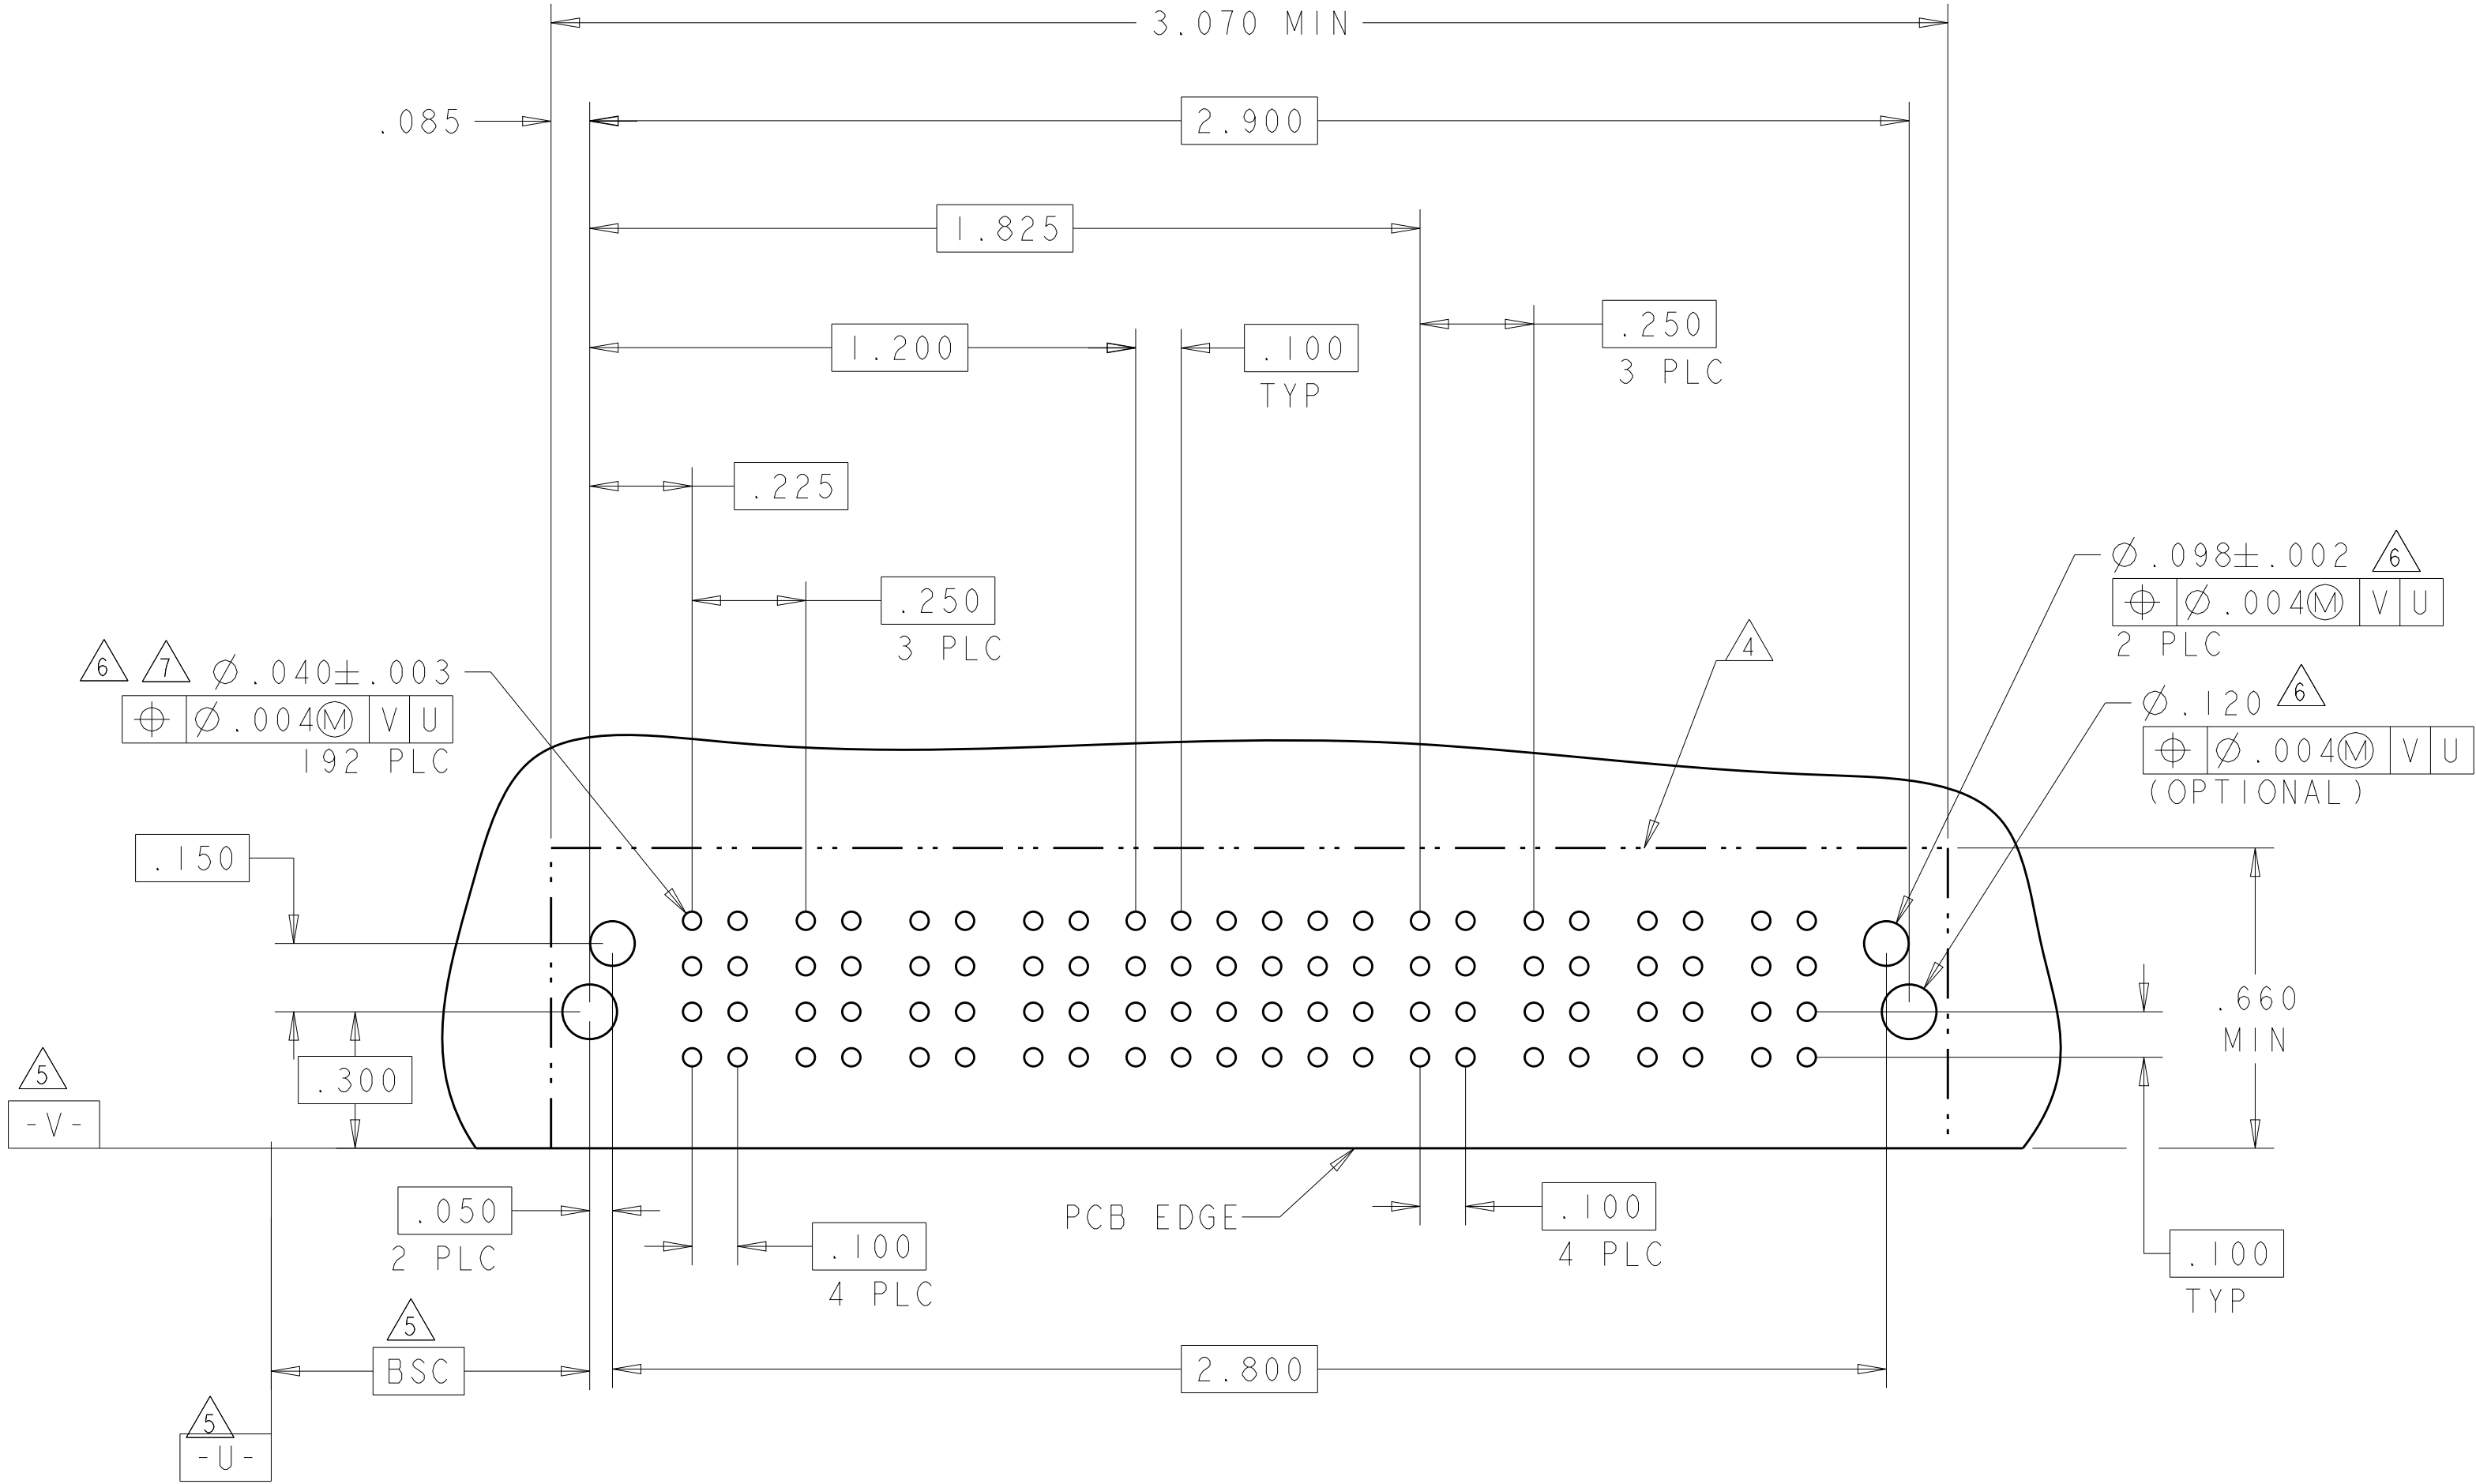


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		WEIGHT -		SIZE A100779	
		CUSTOMER DRAWING		DRAWING NO C=6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 29	
				OF 42	
				REV S2	

N6

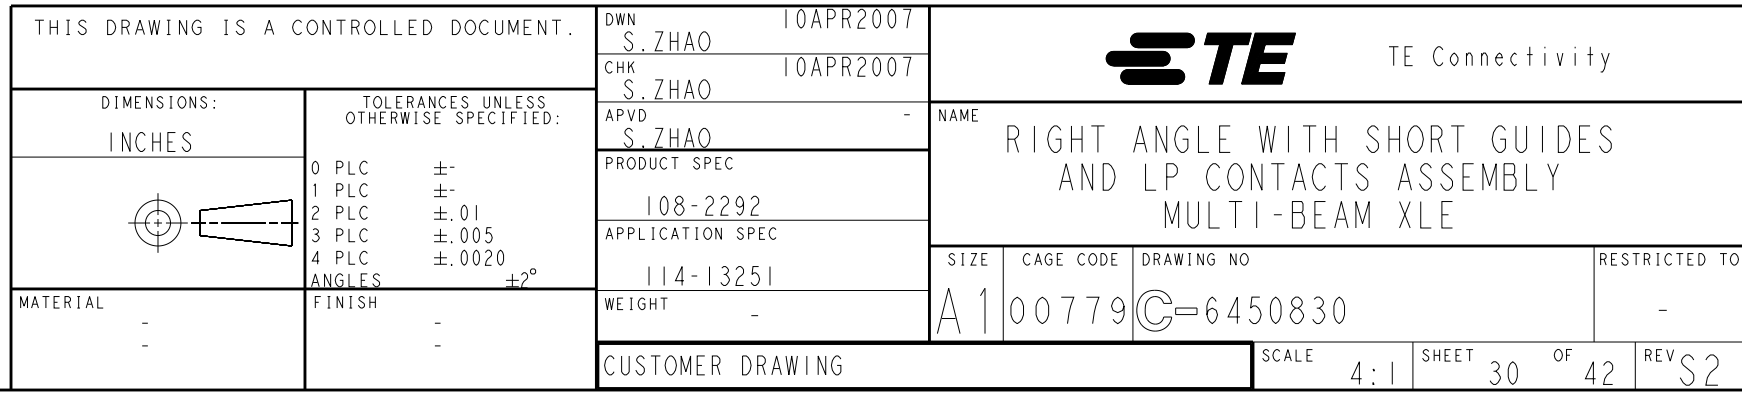

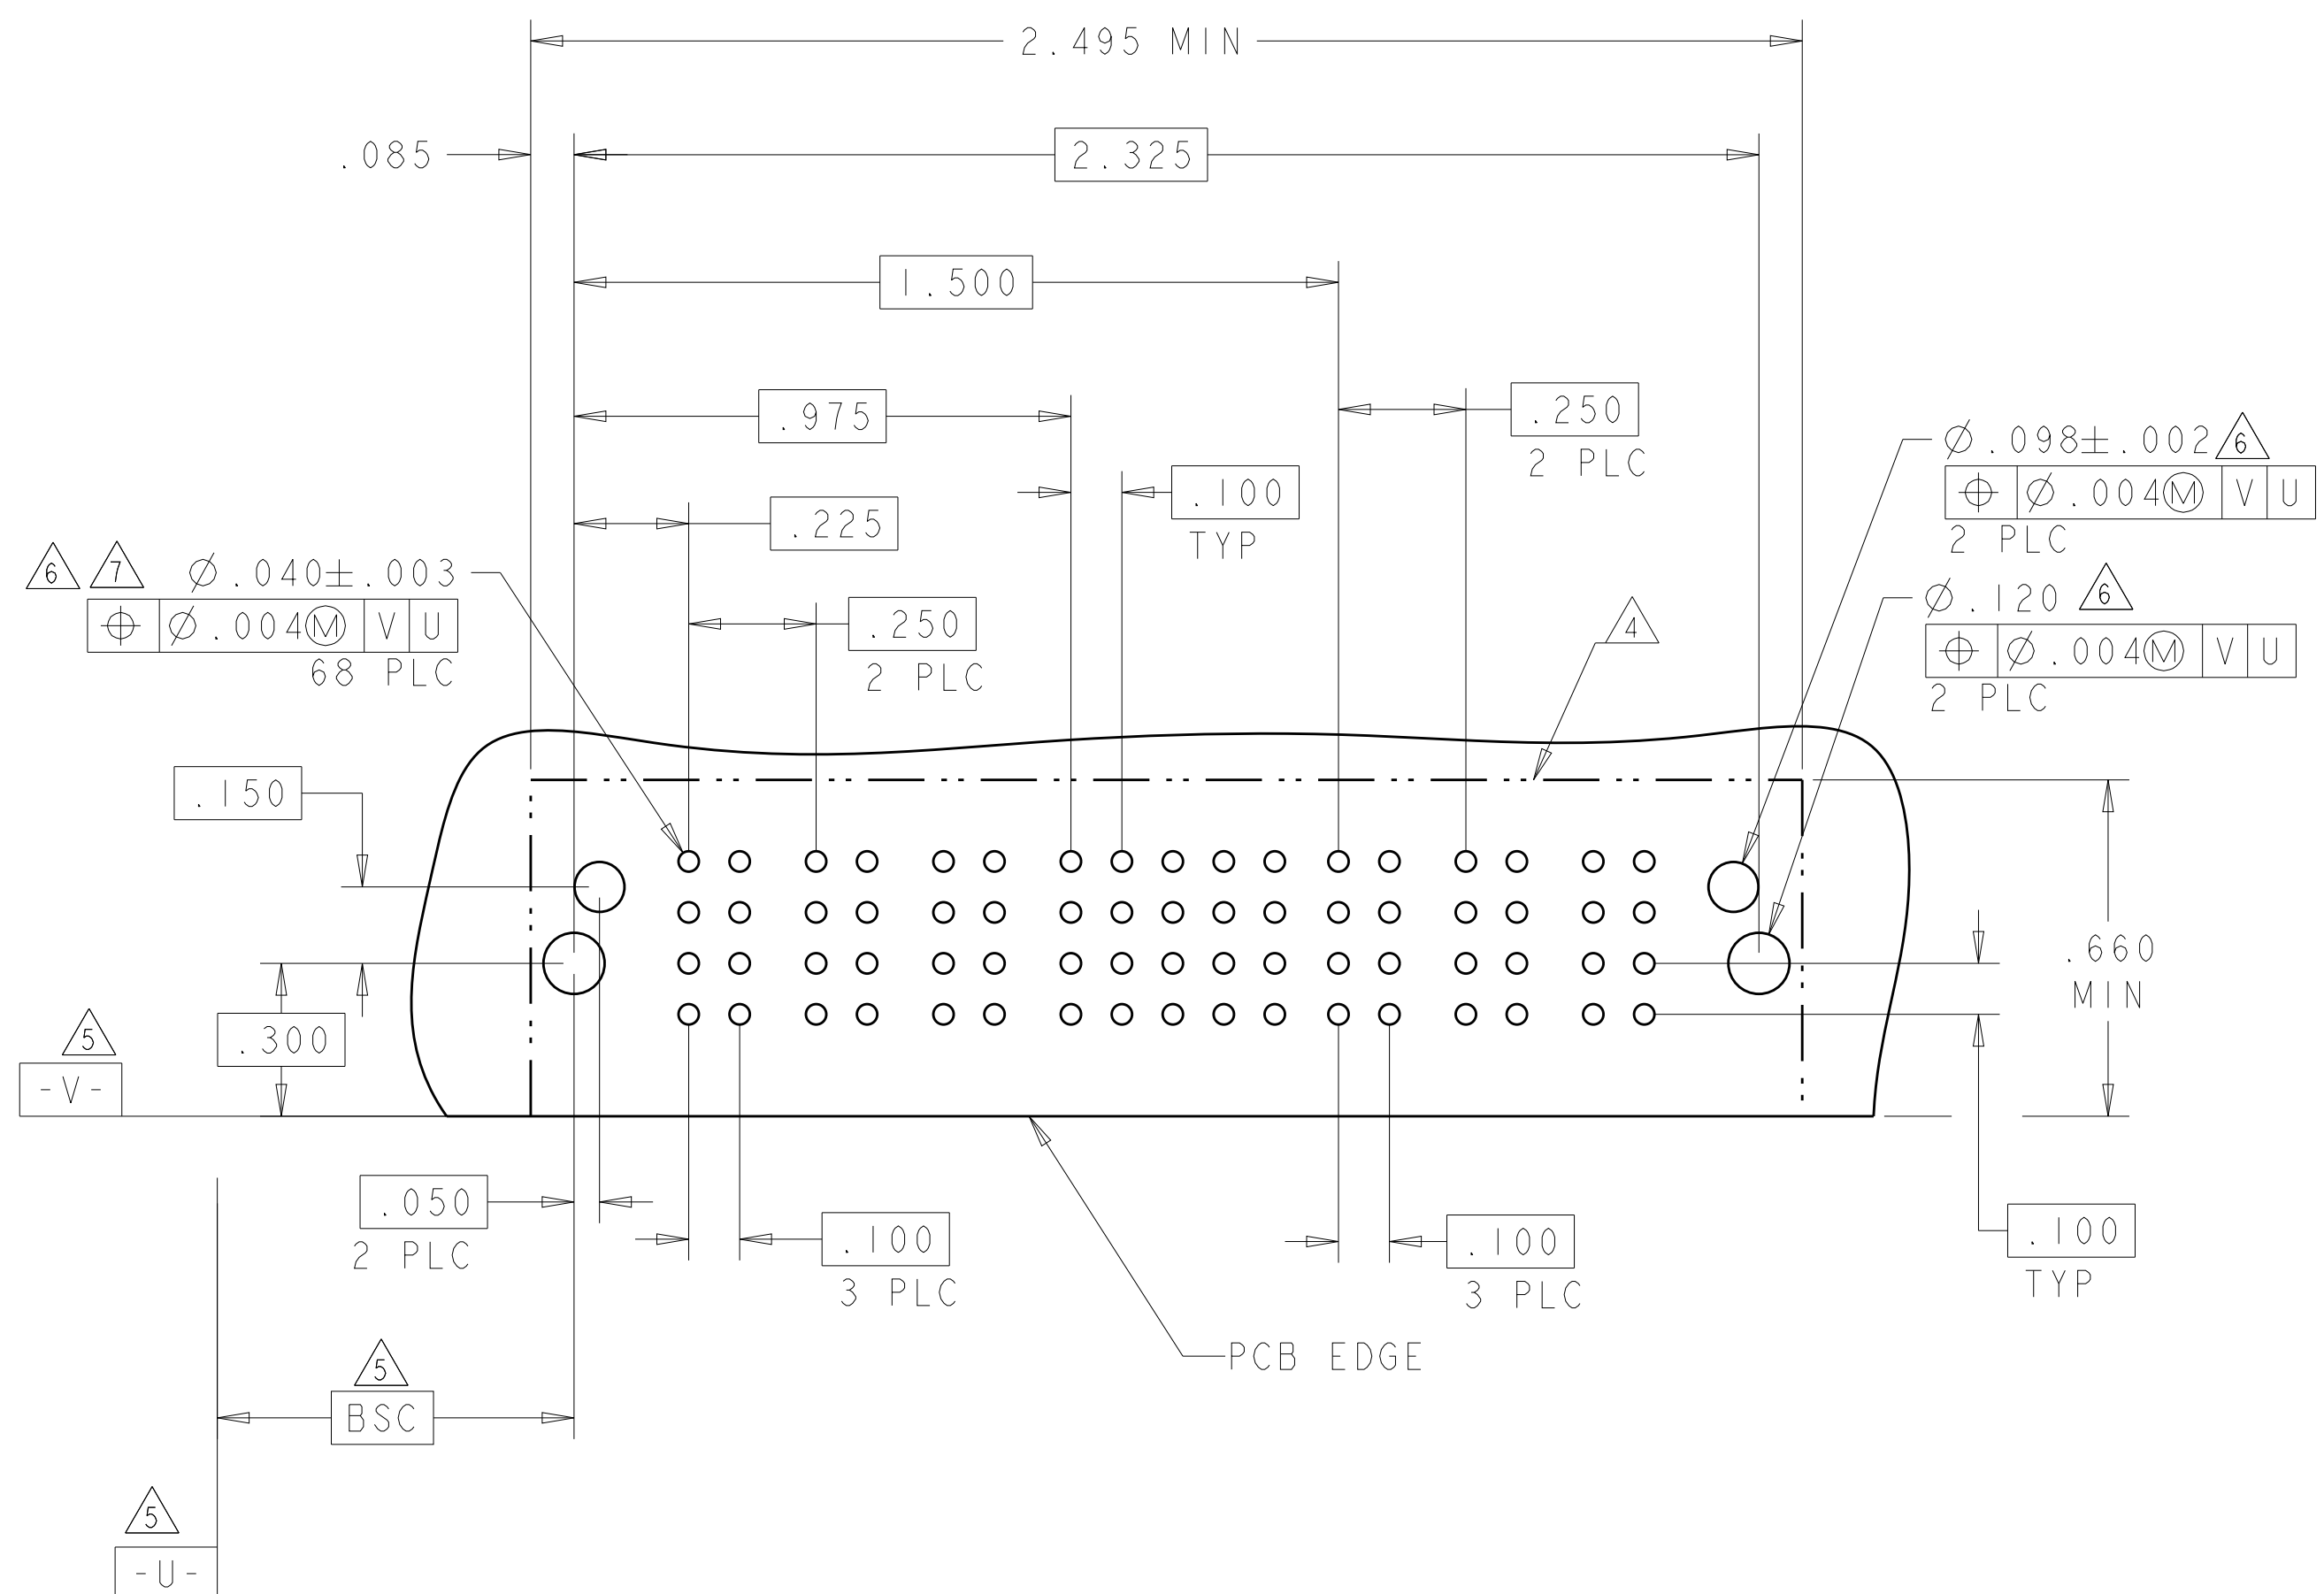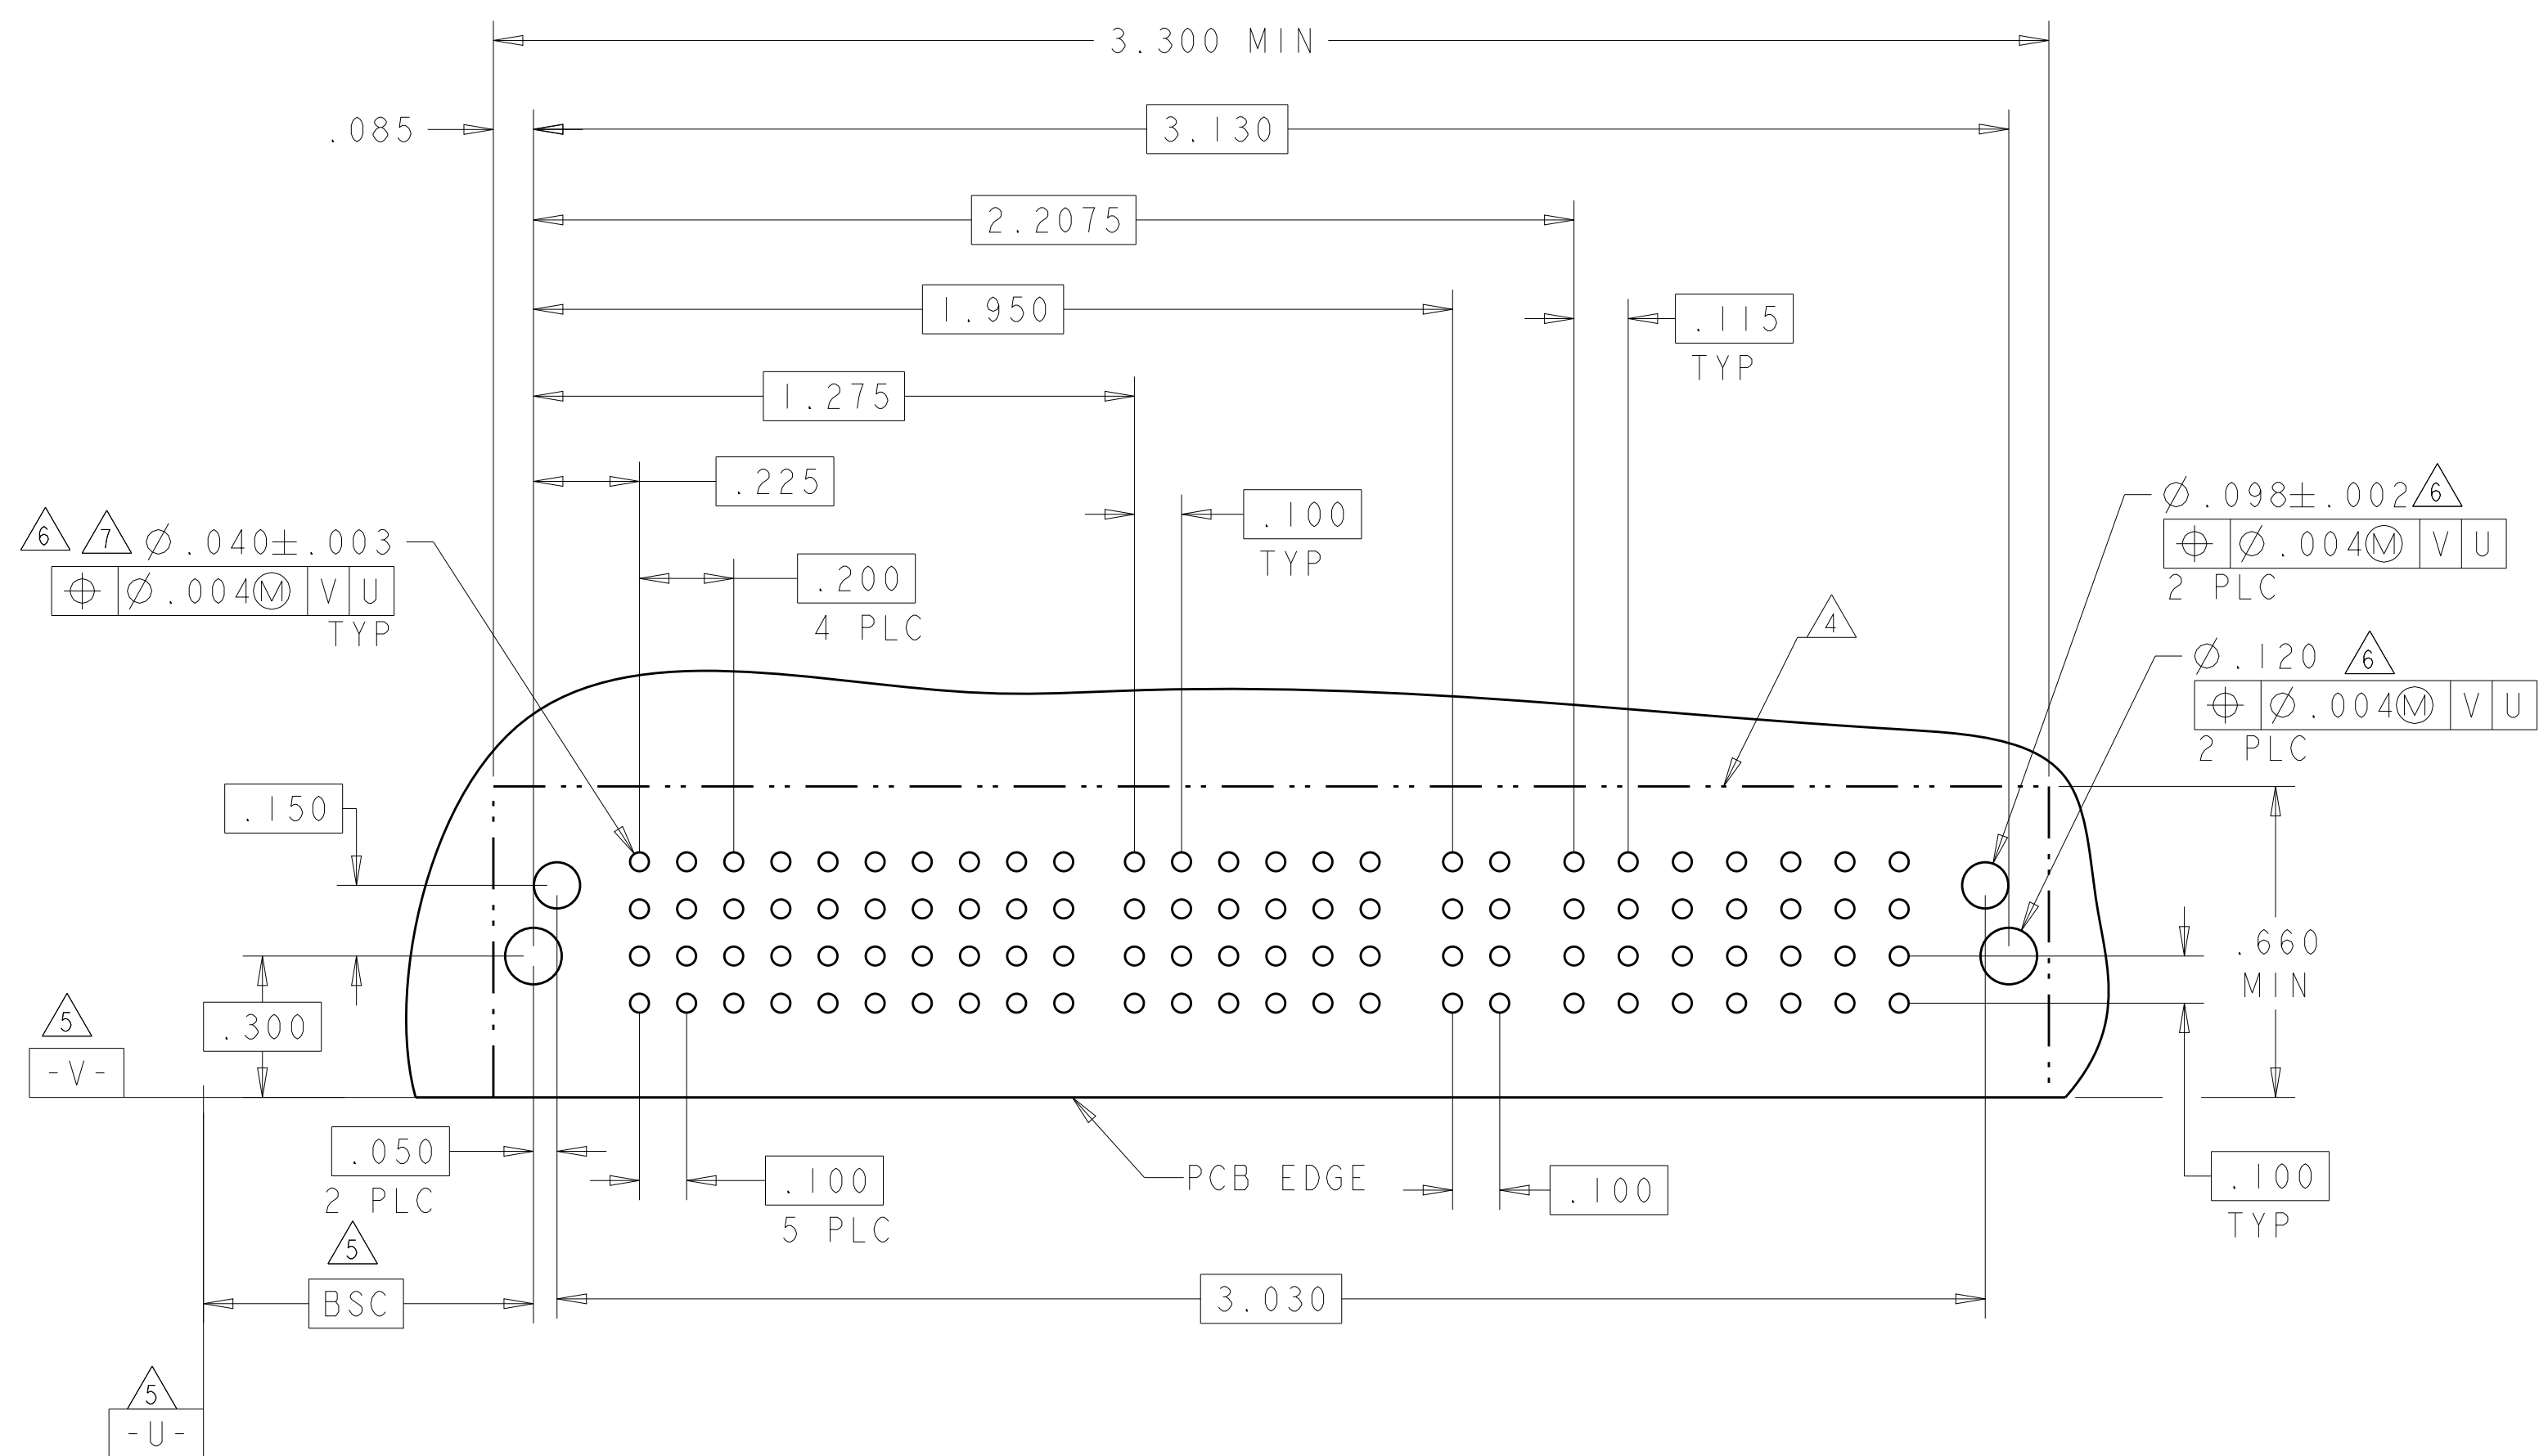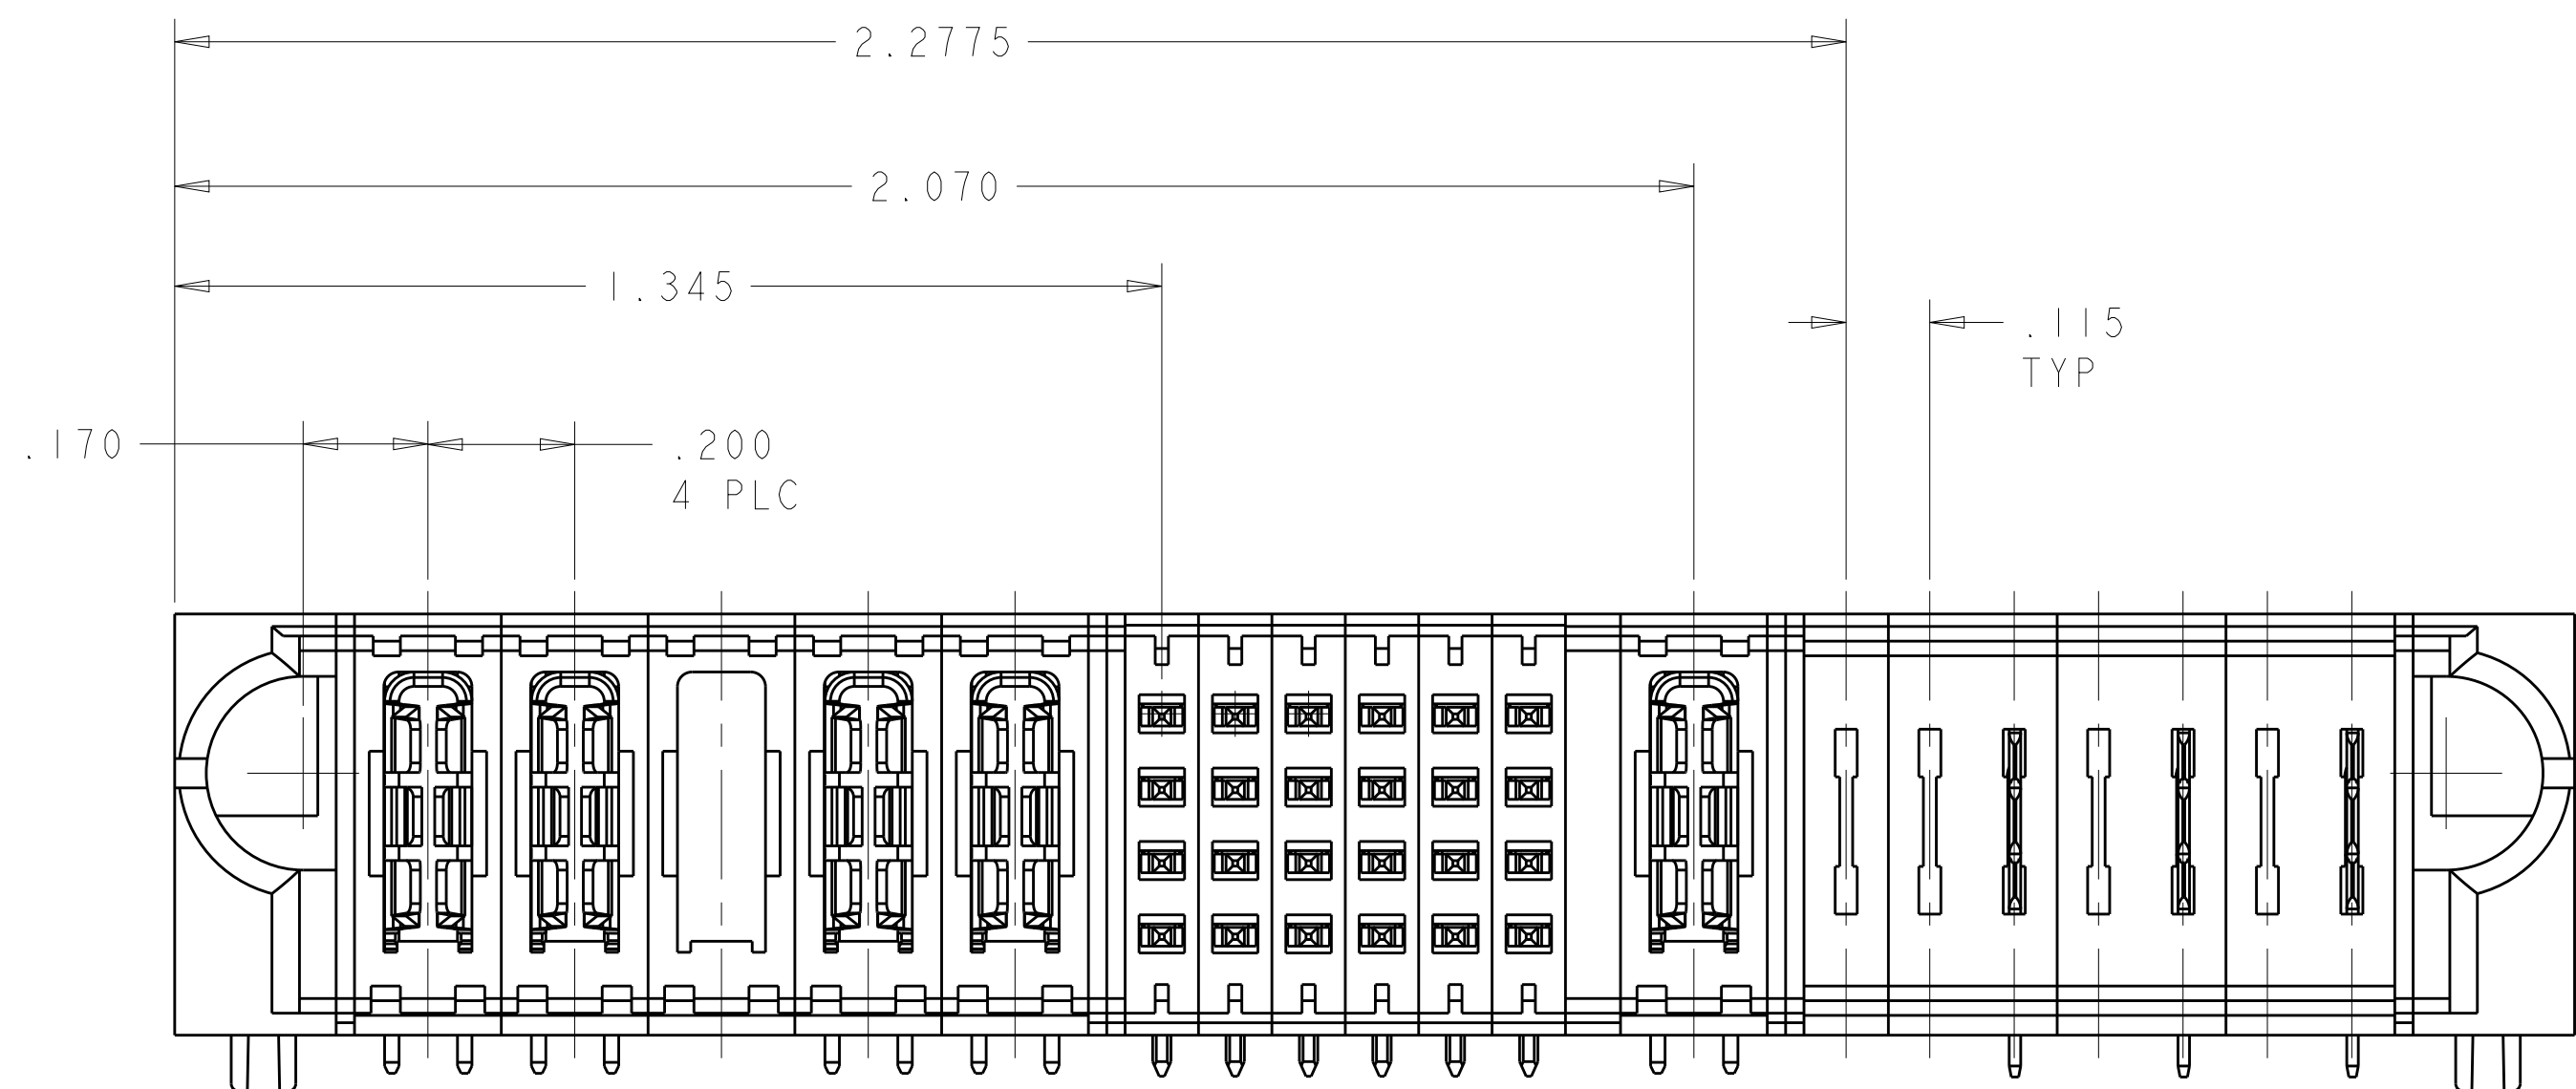[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 10APR2007 CHG S. ZHAO 10APR2007 APP'D S. ZHAO		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		Ø PLC ±.01 PLC ±.01 PLC ±.005 PLC ±.0020 ANGLES ±0°		PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
MATERIAL -		FINISH -		SIZE CAGE CODE DRAWING NO A100779C6450830	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 4:1 SHEET 31 OF 42 REV S	

PART NUMBER	ROWS		POWER					SIGNAL						POWER				
			P1	P2	P3	P4	P5	1	2	3	4	5	6	LP1	LP2	LP3	LP4	
6-6450830-6	D		TM	TM	TM	TM	TM	J	J	J	J	J	J	LMF	LM	LM		
	C							K	K	K	K	K	K					
	B							N	N	N	N	N	N					
	A							S	S	S	S	S	S					
5ACP + 24S + 4LP																		


Top view drawing of a PCB. The overall dimensions are 3.130 MIN (width) and 2.860 (length). The drawing shows a grid of 100 circular holes (10 rows by 10 columns) with a pitch of .040 ± .003. The holes are located within a rectangular area of 2.4075 by 1.750. The PCB has a central horizontal slot. The drawing includes various dimensions and tolerances for the holes and the PCB edges. The holes are labeled with a diameter of .040 ± .003 and a tolerance of .004. The PCB edges are labeled with a tolerance of .004. The drawing also shows a central horizontal slot with a width of .100 and a depth of .100. The drawing includes a title block with the text "PCB EDGE" and "PCB EDGE".

Dimensions and Tolerances:

- Overall Width: 3.130 MIN
- Overall Length: 2.860
- Grid Dimensions: 2.4075 (width), 1.750 (height)
- Hole Pitch: .040 ± .003
- Hole Diameter: $\varnothing .040 \pm .003$
- Hole Tolerance: .004
- PCB Edge Tolerance: .004
- Central Slot Width: .100
- Central Slot Depth: .100


Features:

- 100 Circular Holes (10 rows by 10 columns)
- Central Horizontal Slot
- PCB Edge

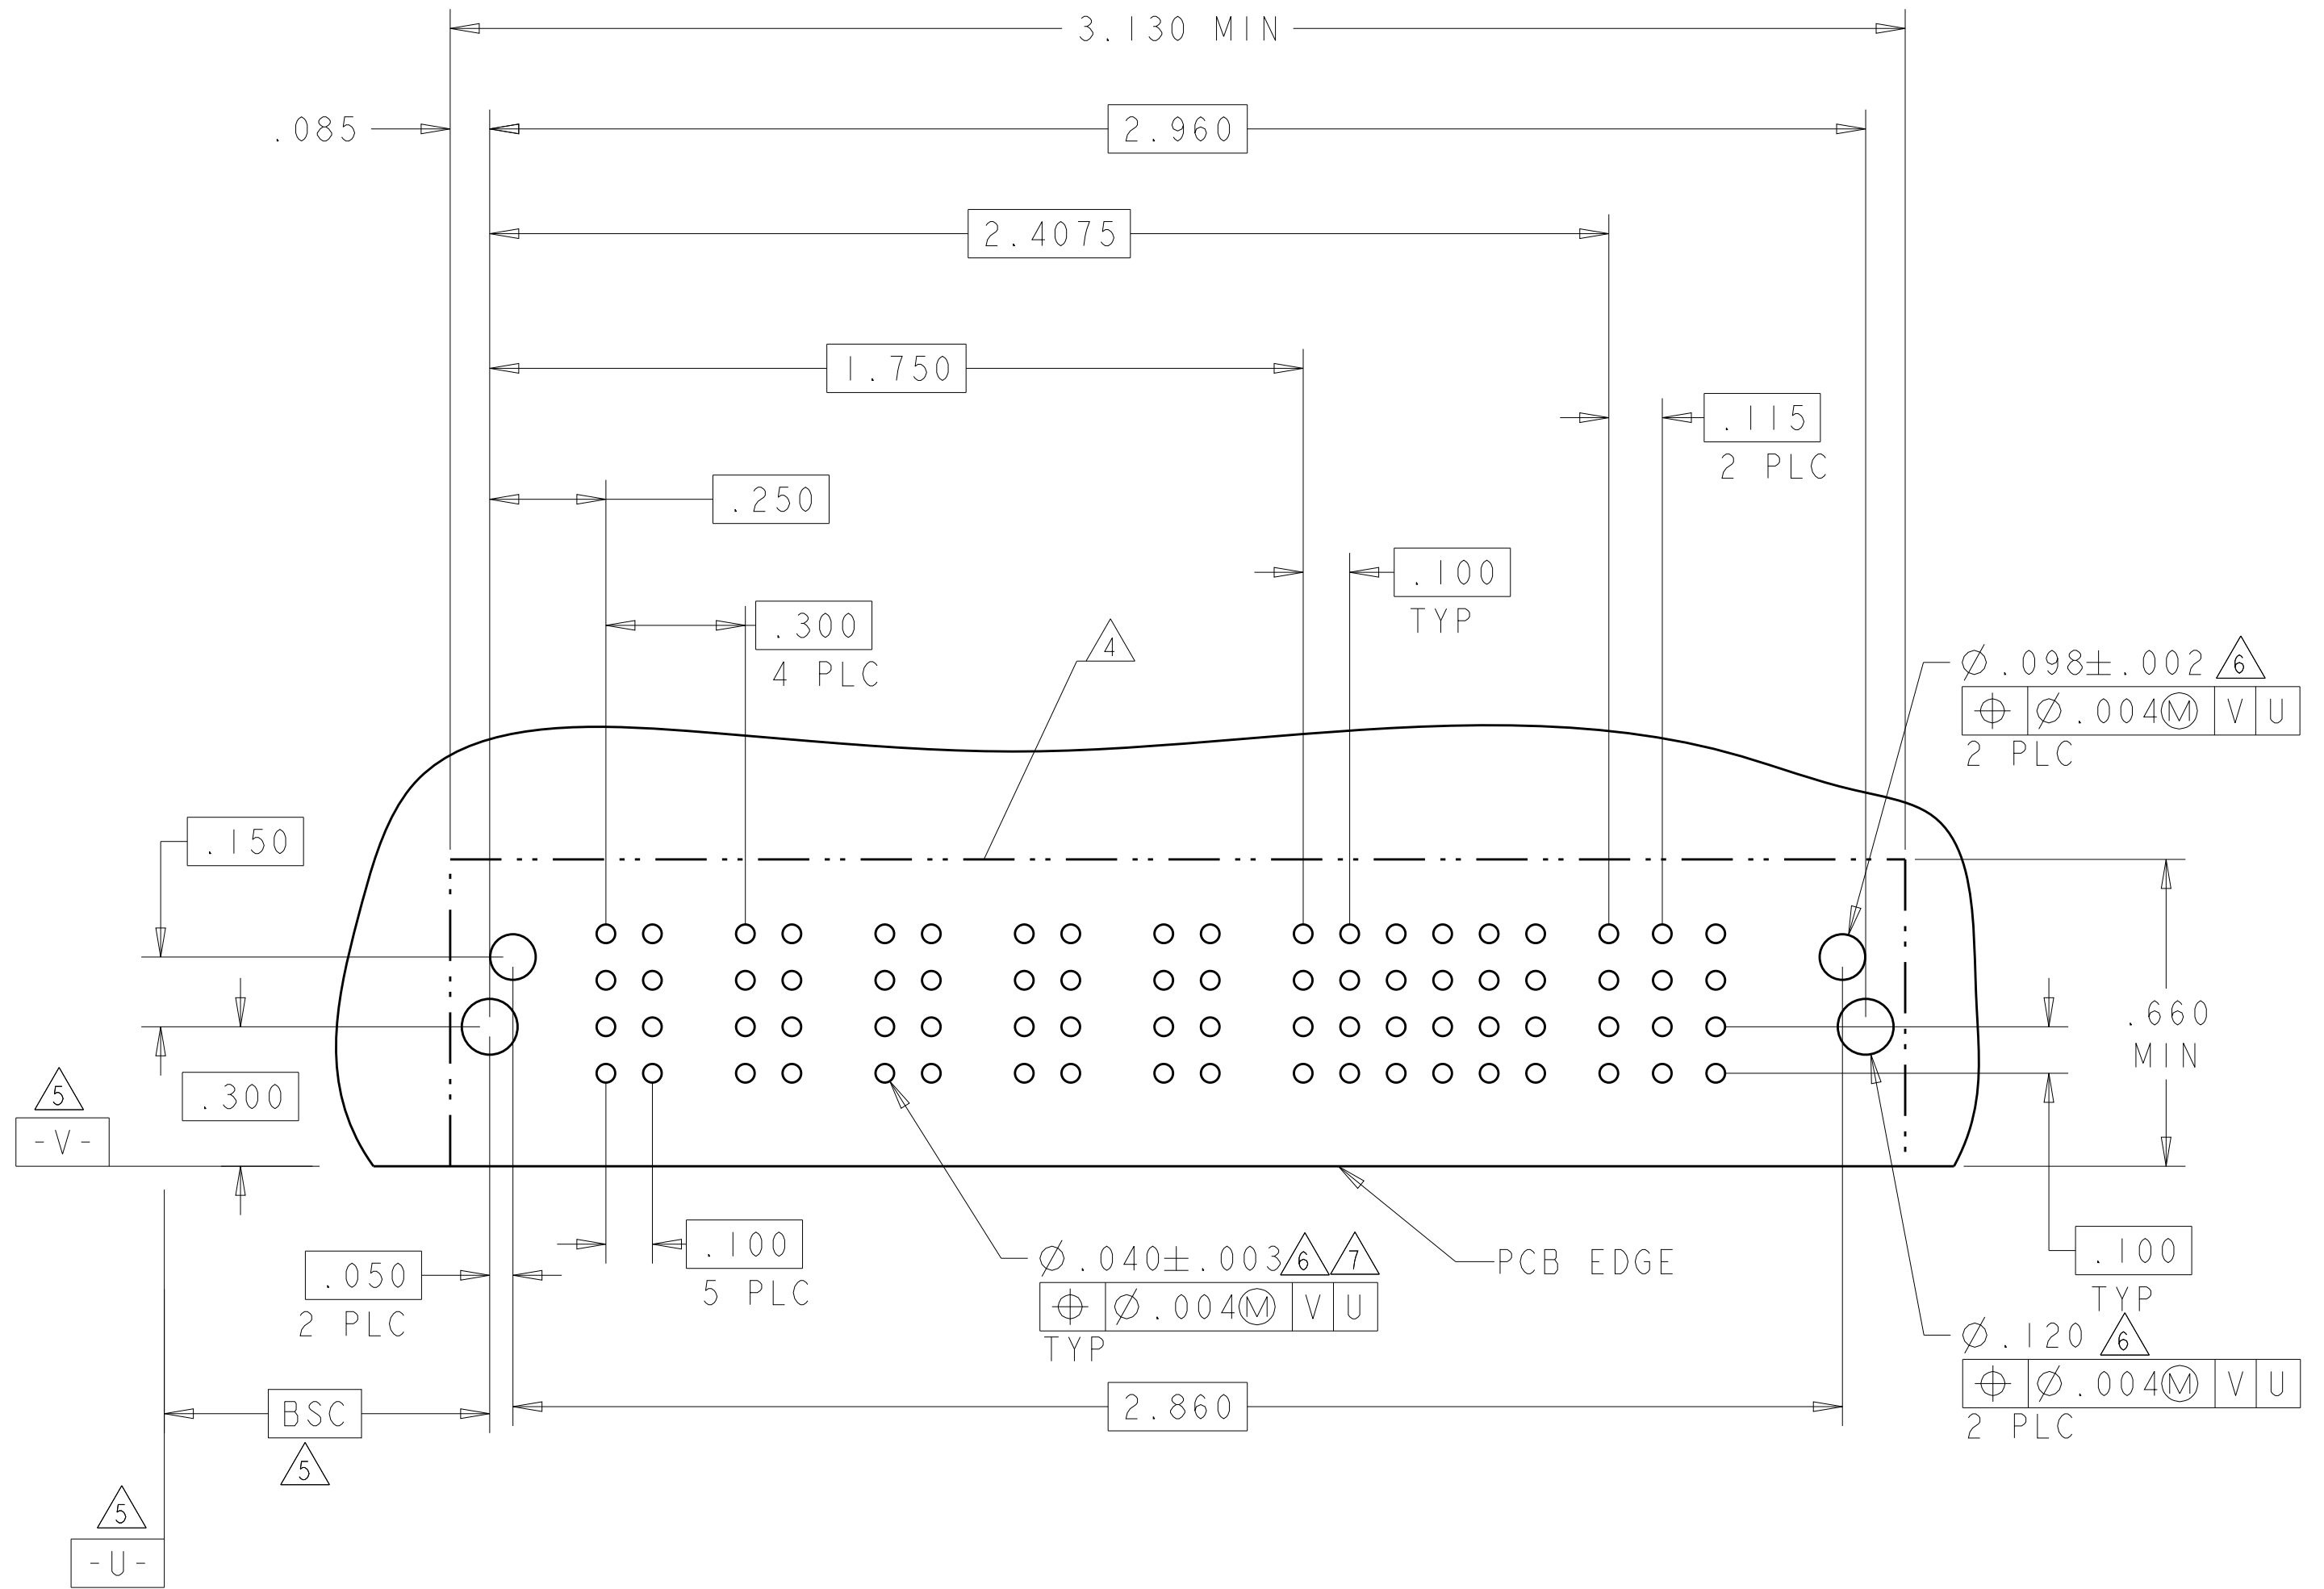



4805 (3/11)

[illegible][illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S_ZHAO 10APR2007		 TE Connectivity	
DIMENSIONS: INCHES		CHG S_ZHAO 10APR2007			
		APVD S_ZHAO -			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		0 PLC ±			
		1 PLC ±			
		2 PLC ±.01			
		3 PLC ±.005		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 100779 © 6450830 -	
		4 PLC ±.0020			
		ANGLES ±°			
		FINISH			
MATERIAL		WEIGHT -		CUSTOMER DRAWING	
				SCALE 4:1 SHEET 34 OF 42 REV S2	

Timing diagram for the 4-bit parallel adder showing the propagation of a carry signal through four full adder stages. The carry signal starts at 0.300 (3 PLC) and propagates through stages 1, 2, 3, and 4, with delays of 0.350, 0.250, and 0.275 respectively. The final carry output is 0.275 (8 PLC).


A

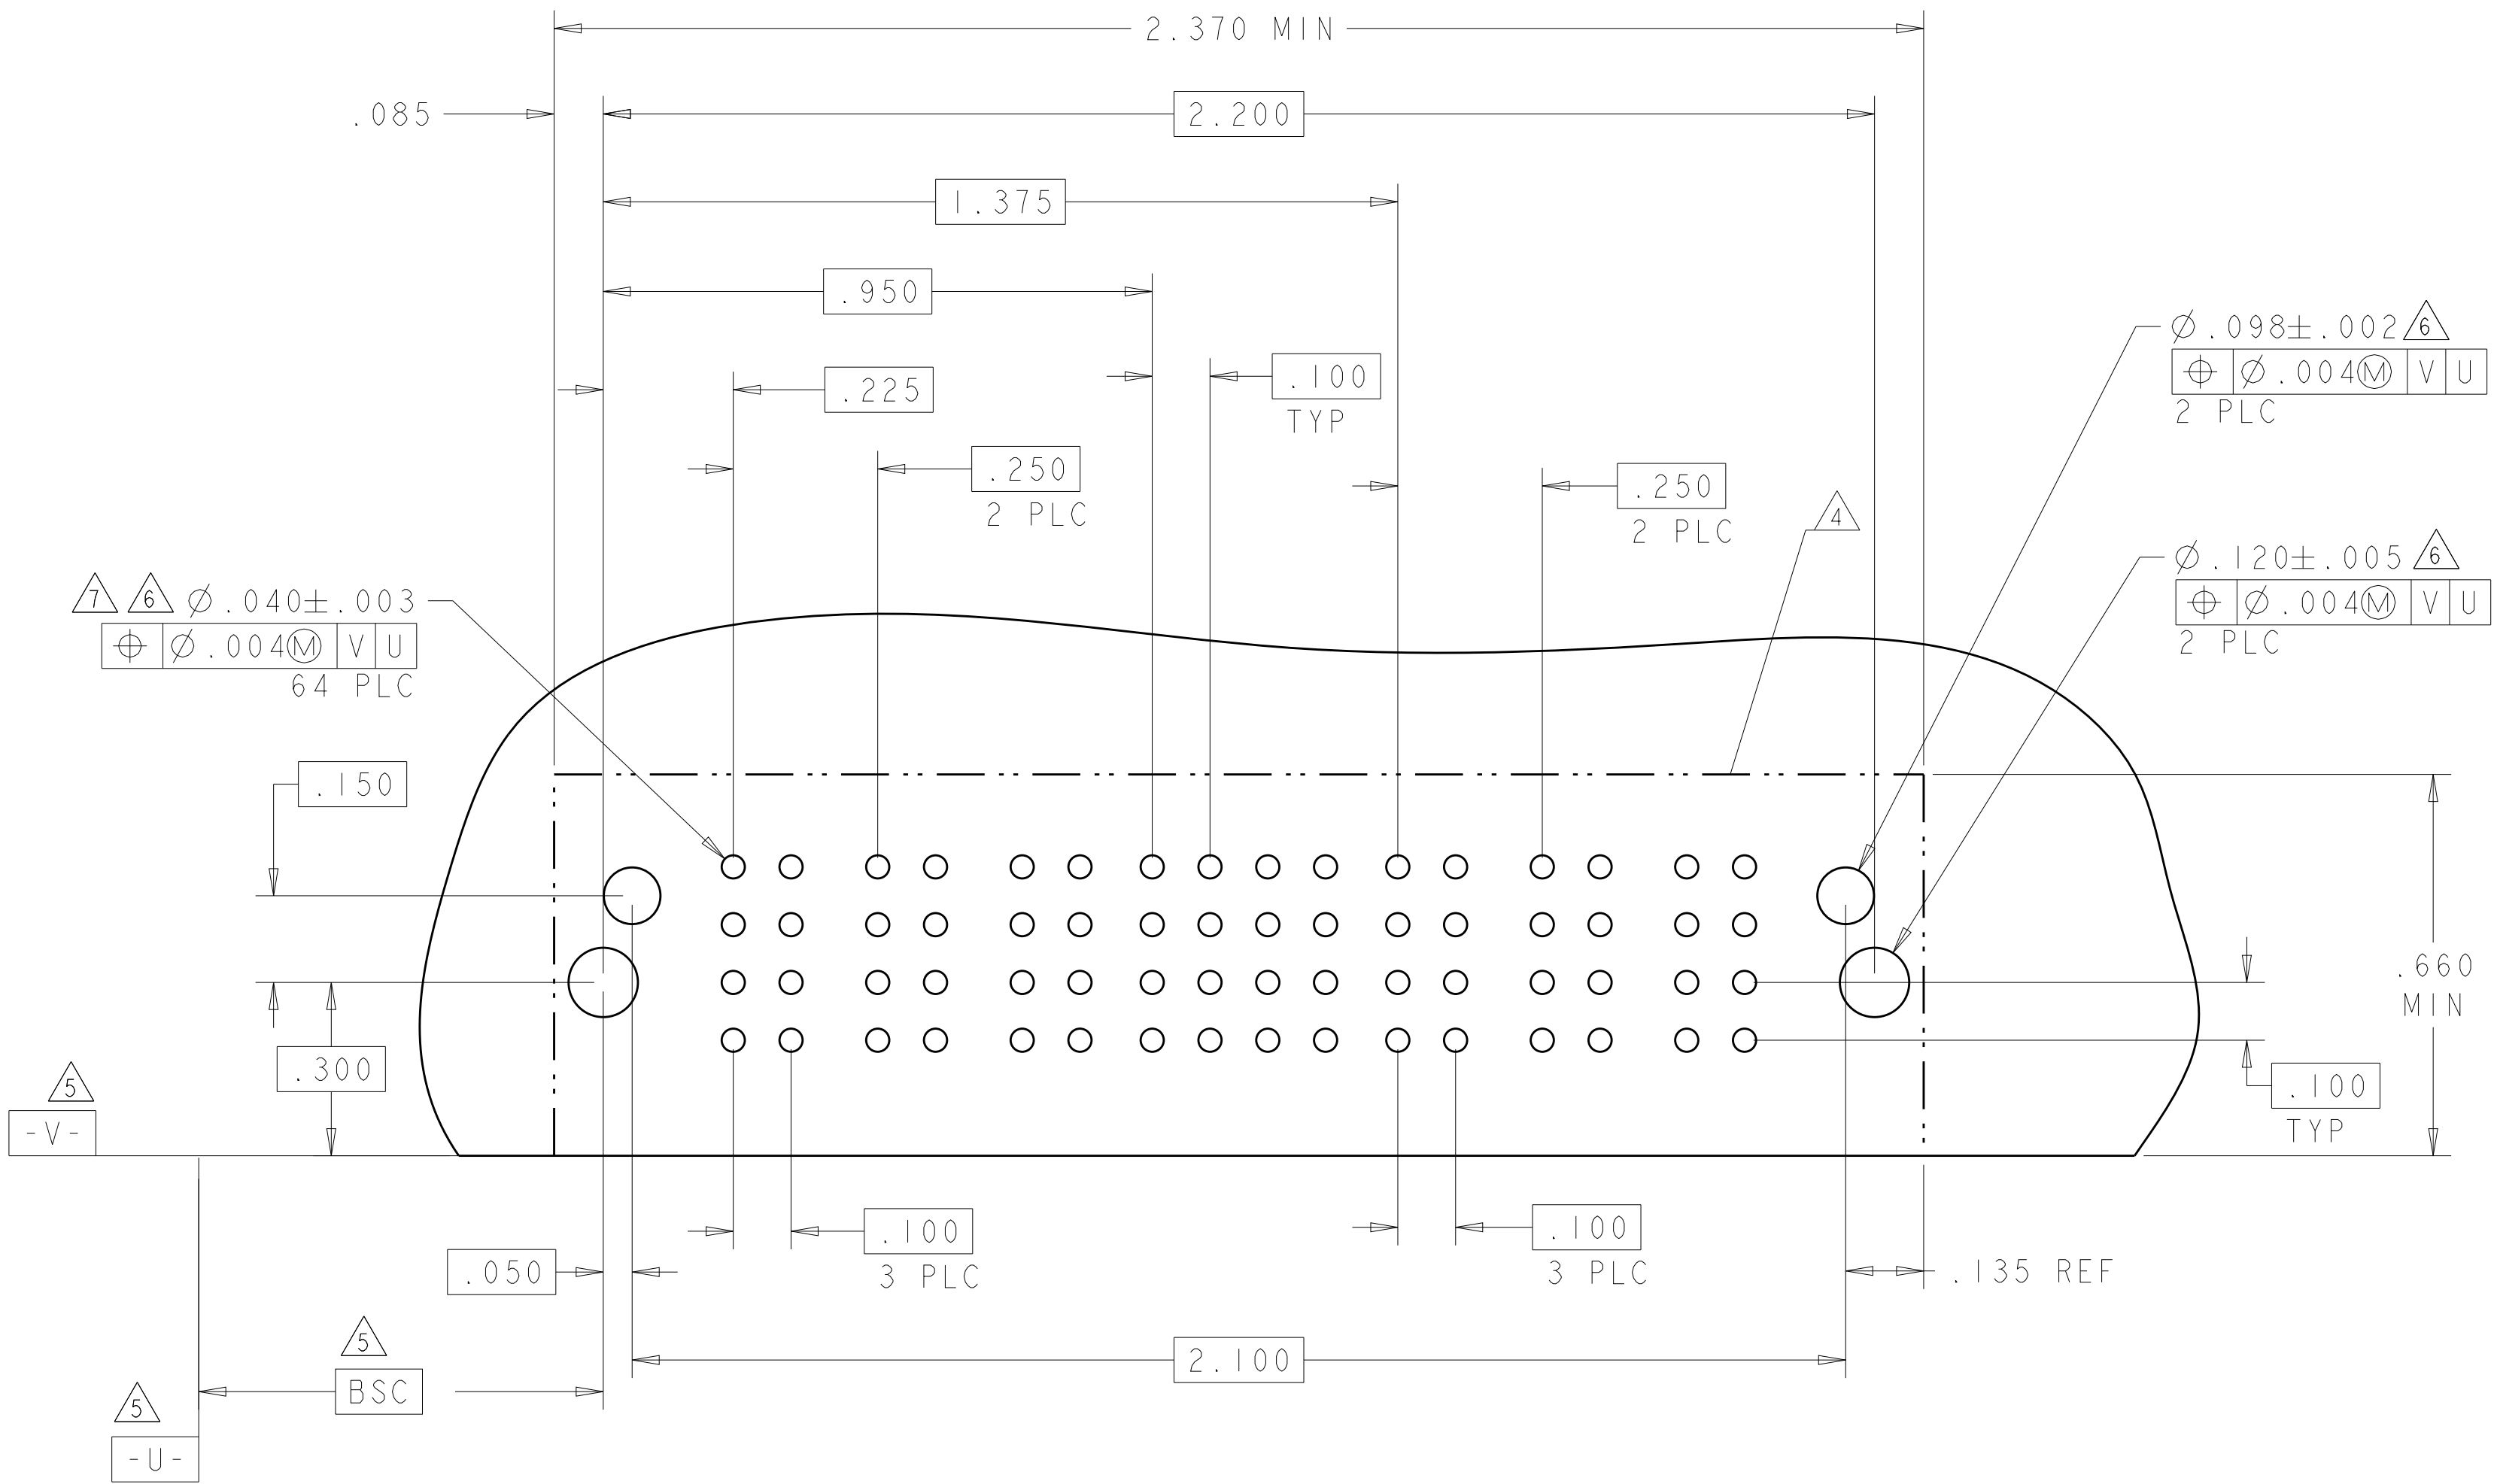[illegible]4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-


PART NUMBER	ROWS		LOW POWER			SIGNAL			LOW POWER				
			LP1	LP2	LP3	1	2	3	LP4	LP5	LP6	LP7	
7-6450830-6	D		LM	LM	LM	J	J	J	LM	LM	LM	LM	
	C					K	K	K					
	B					N	N	N					
	A					S	S	S					
3LP + 12S + 4LP													

R3

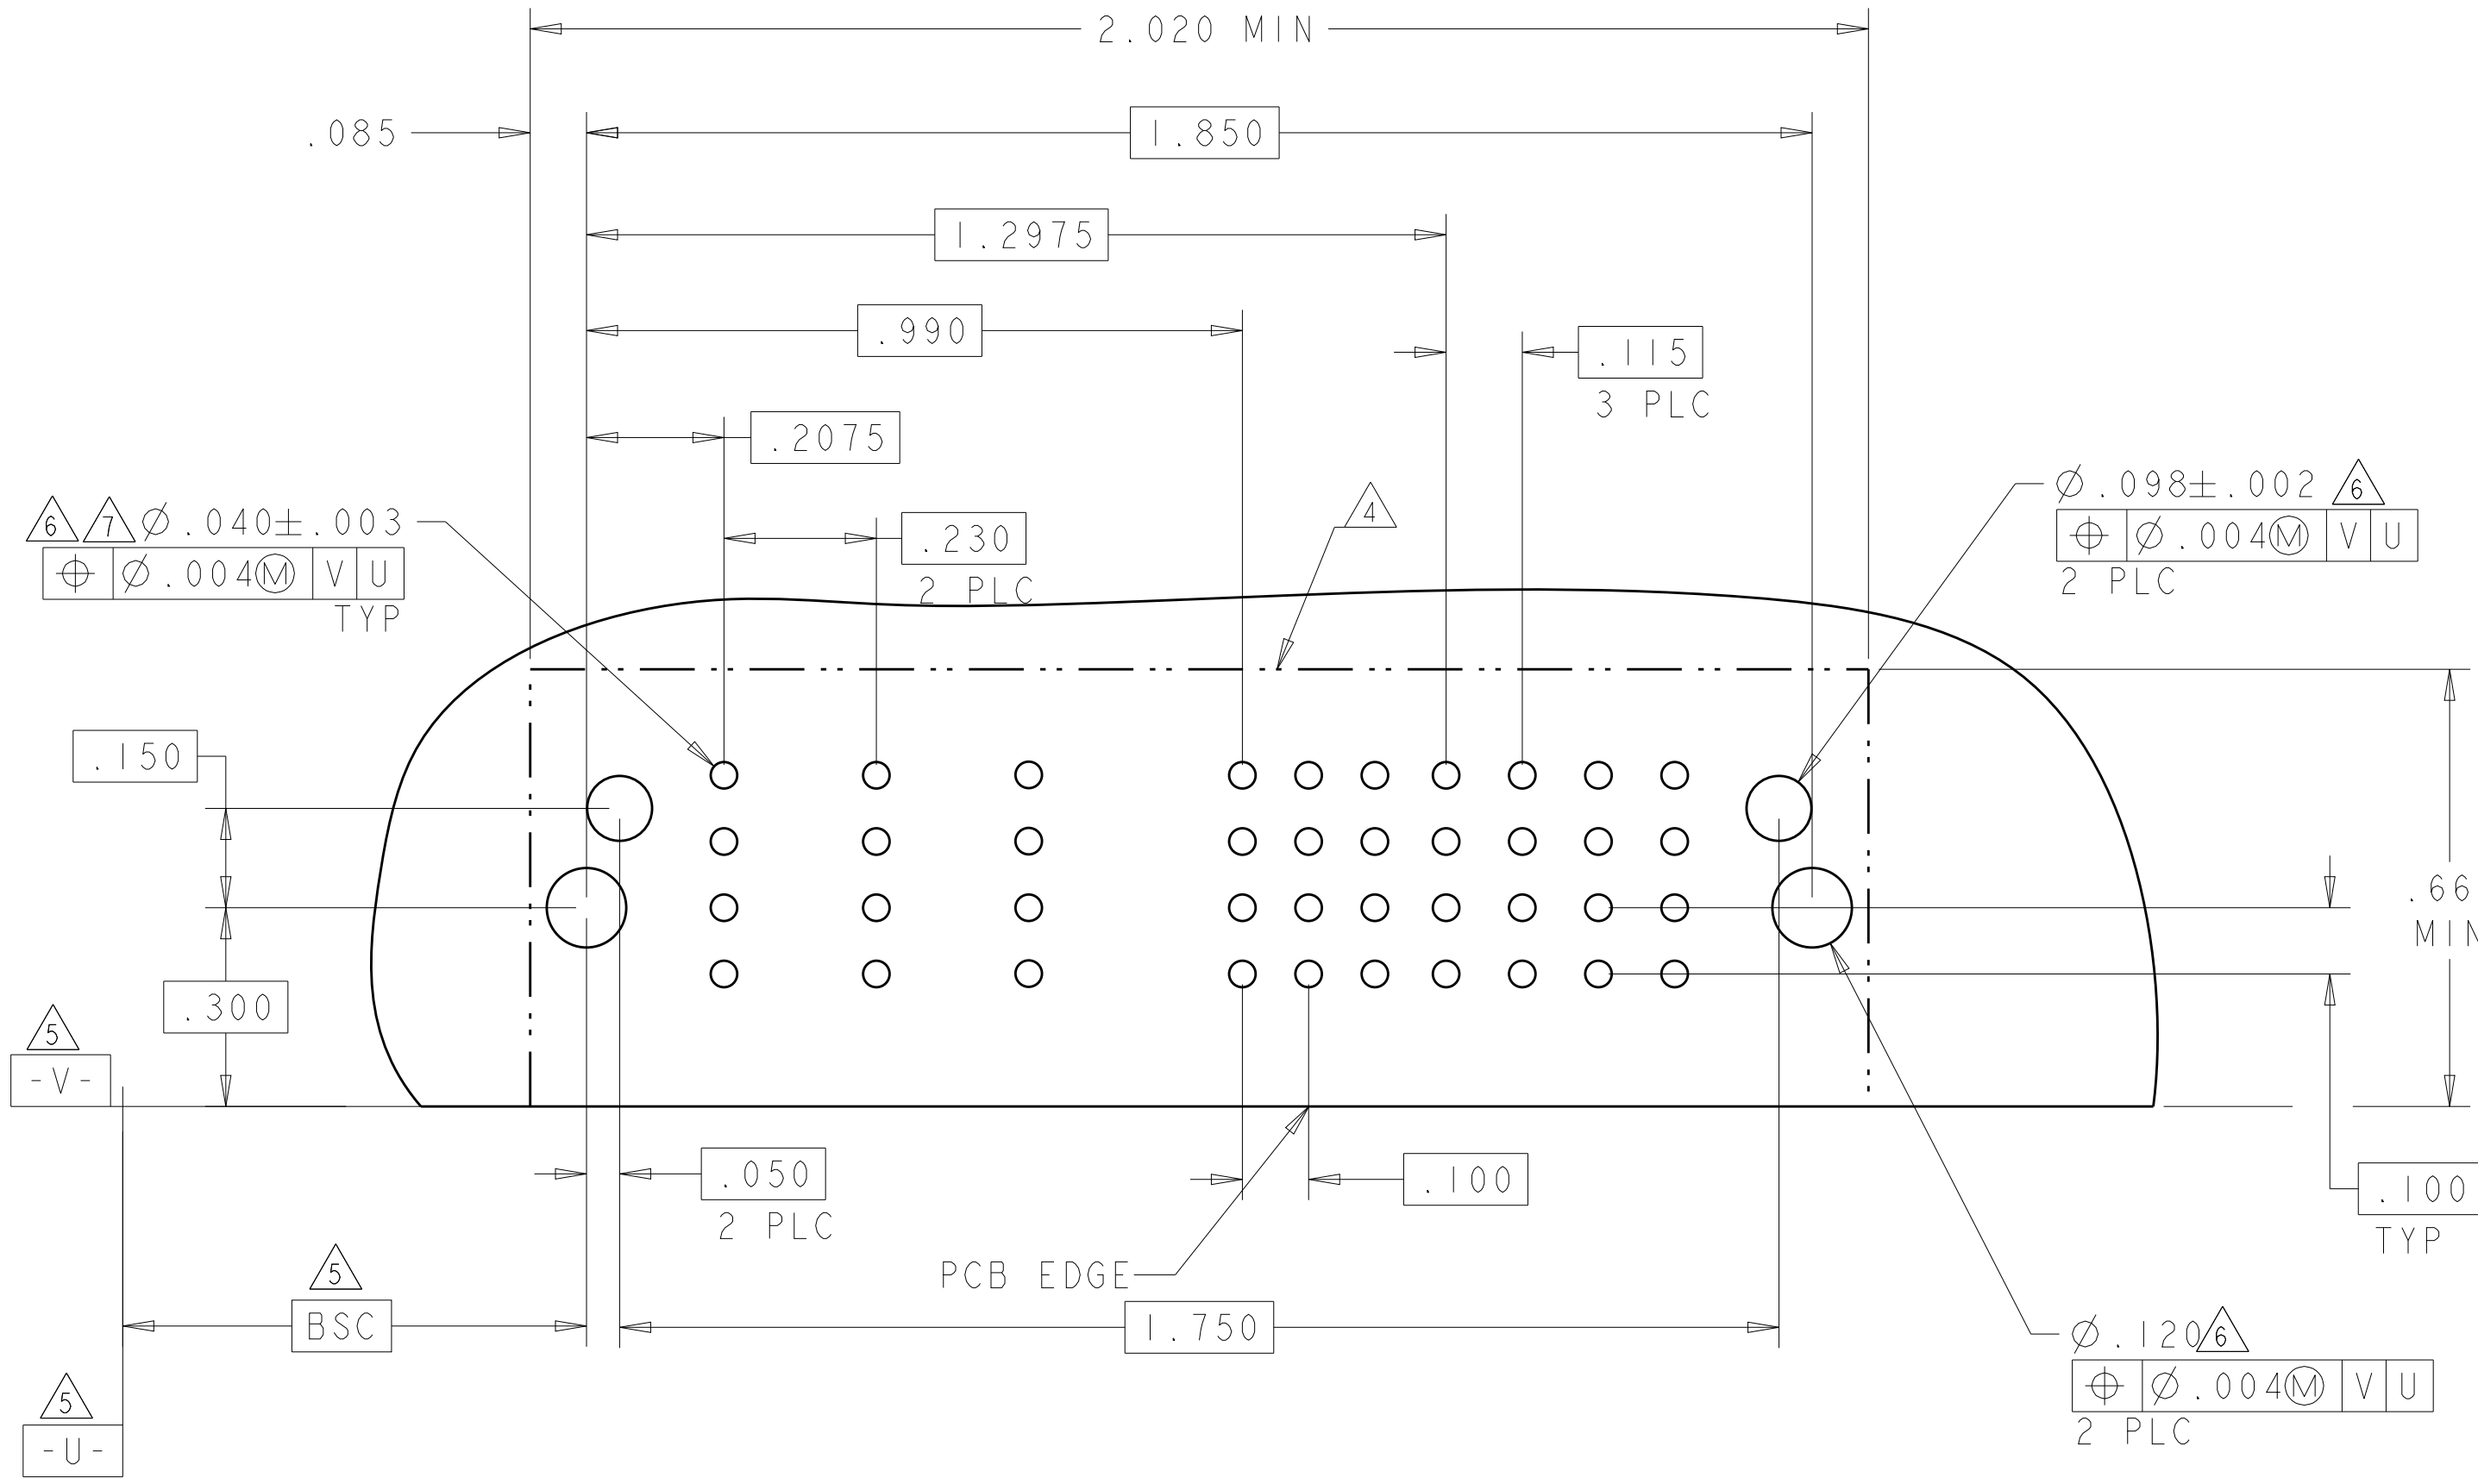



PART NUMBER	ROWS		POWER				SIGNAL												POWER	
			P1	P2	P3	P4	1	2	3	4	5	6	7	8	9	10	11	12	P4	
7-6450830-7	D		TM	TM	TM	TM	E			E	J		J		J	E		E	TM	
	C						F	F	F	F		K		K		F		F		
	B						G		G		N		N		N	G		N		
	A						H	H	H	H	H	H		S		H		H		
4P + 48S + 1P																				

BLANK SIGNAL PINS ARE UNLOADED PINS

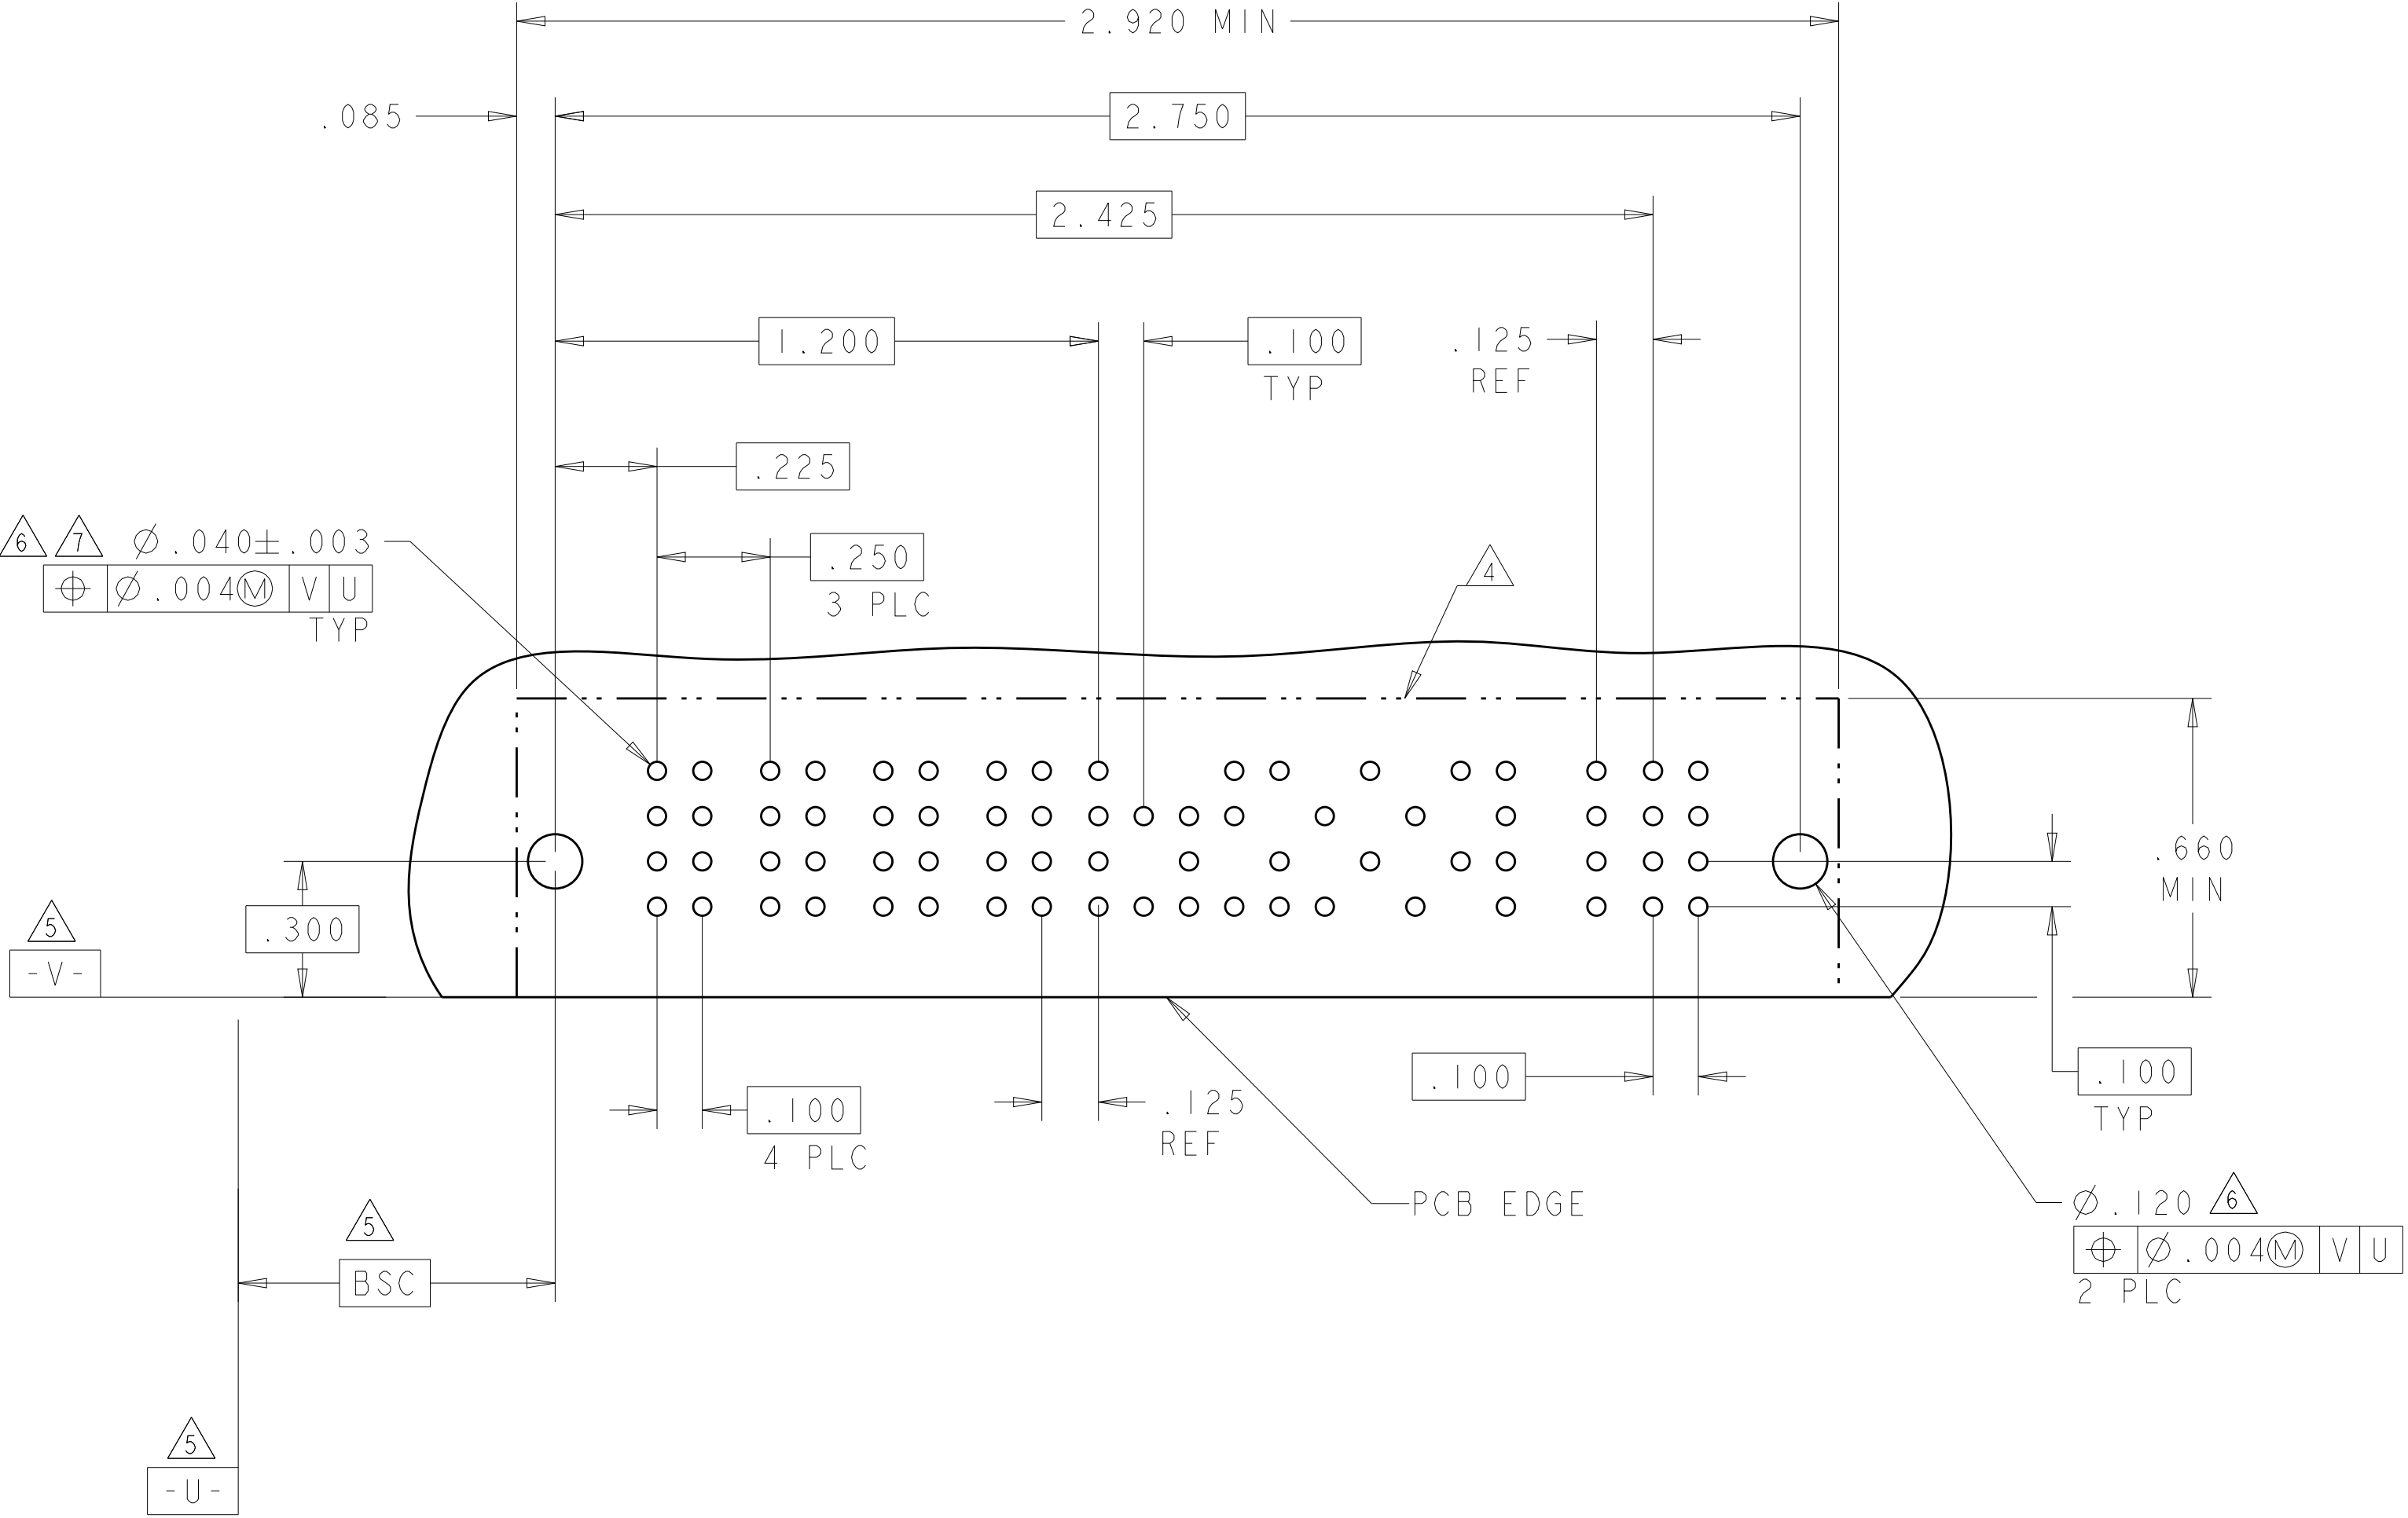


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		LOW POWER												SIGNAL															POWER				
			LP1	LP2	LP3	LP4	LP5	LP6	LP7	LP8	LP9	LP10	LP12	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	P1	P2	P3	P4		
7-6450830-8	D		LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	LM	J	J	J	J	J	J	J	J	J	J	J	J	J	J	TM	TM	TM	TM			
	C													K	K	K	K	K	K	K	K	K	K	K	K	K	K						K	
	B													N	N	N	N	N	N	N	N	N	N	N	N	N	N						N	N
	A													S	S	S	S	S	S	S	S	S	S	S	S	S	S						S	S
12LP + 60S + 4P																																		

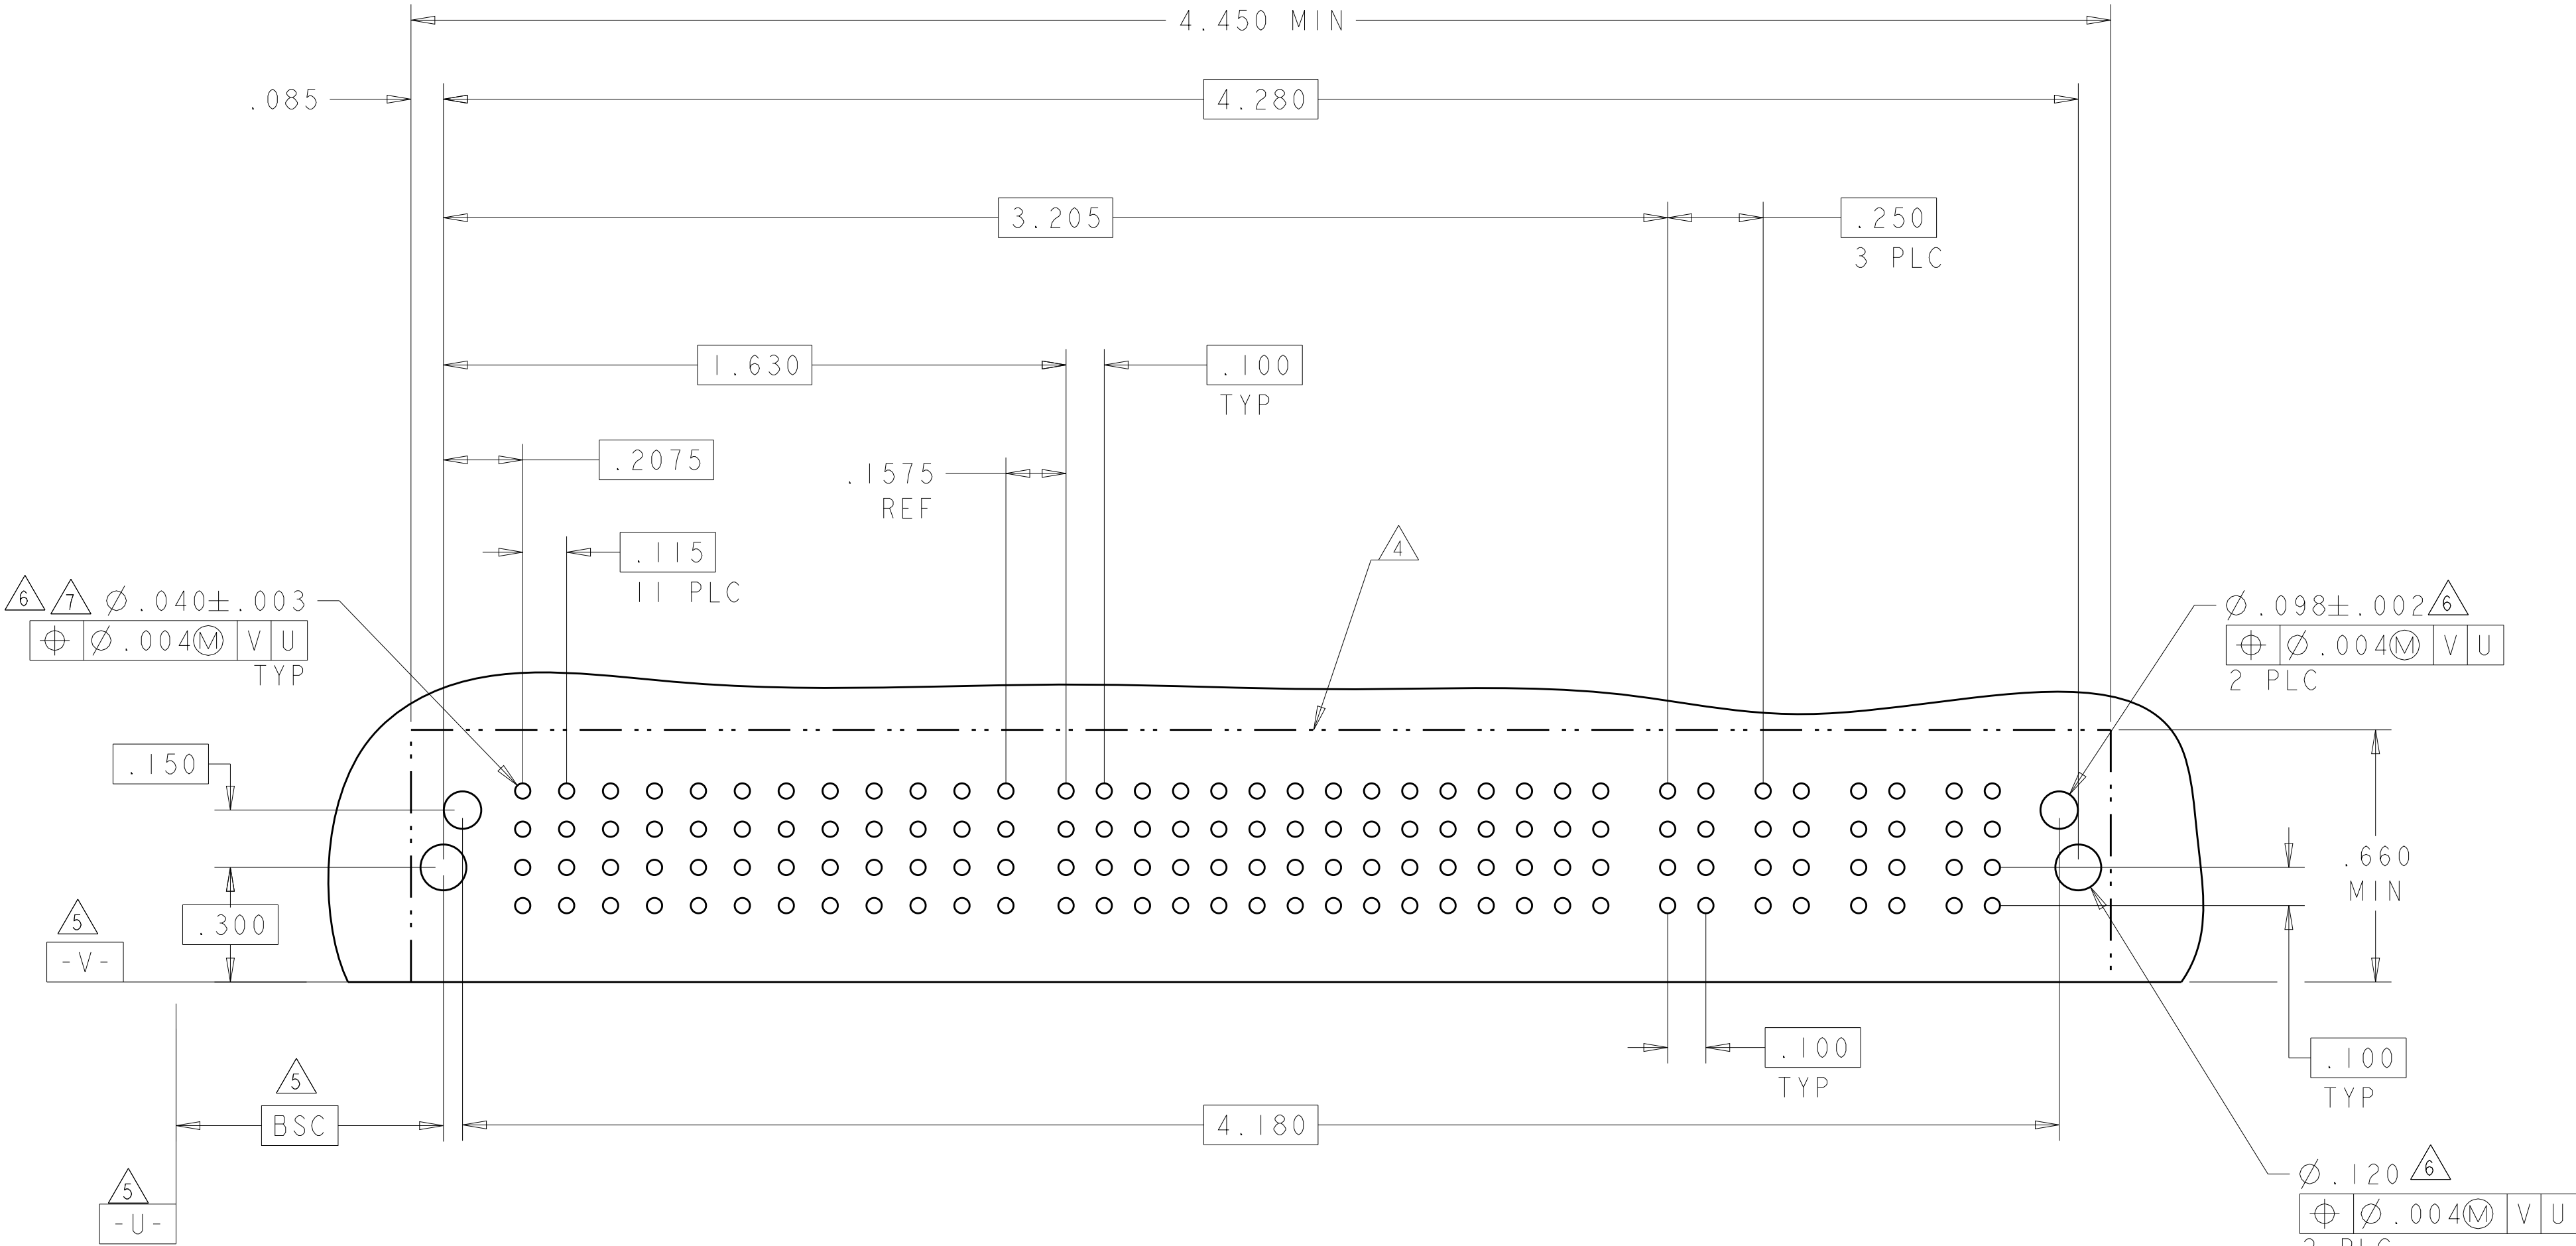

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER							SIGNAL						POWER							
			P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6	P8	P9	P10	P11	P12	P13	P14	
7-6450830-9	D		TM	TM	TM	TM	TM	TM	TM	E	E	E	E	E	E	TM	TM	TM	TM	TM	TM	TM	
	C									F	F	F	F	F	F								
	B									G	G	G	G	G	G								
	A									HD	H	H	H	H	H								
7P + 24S + 7P																							

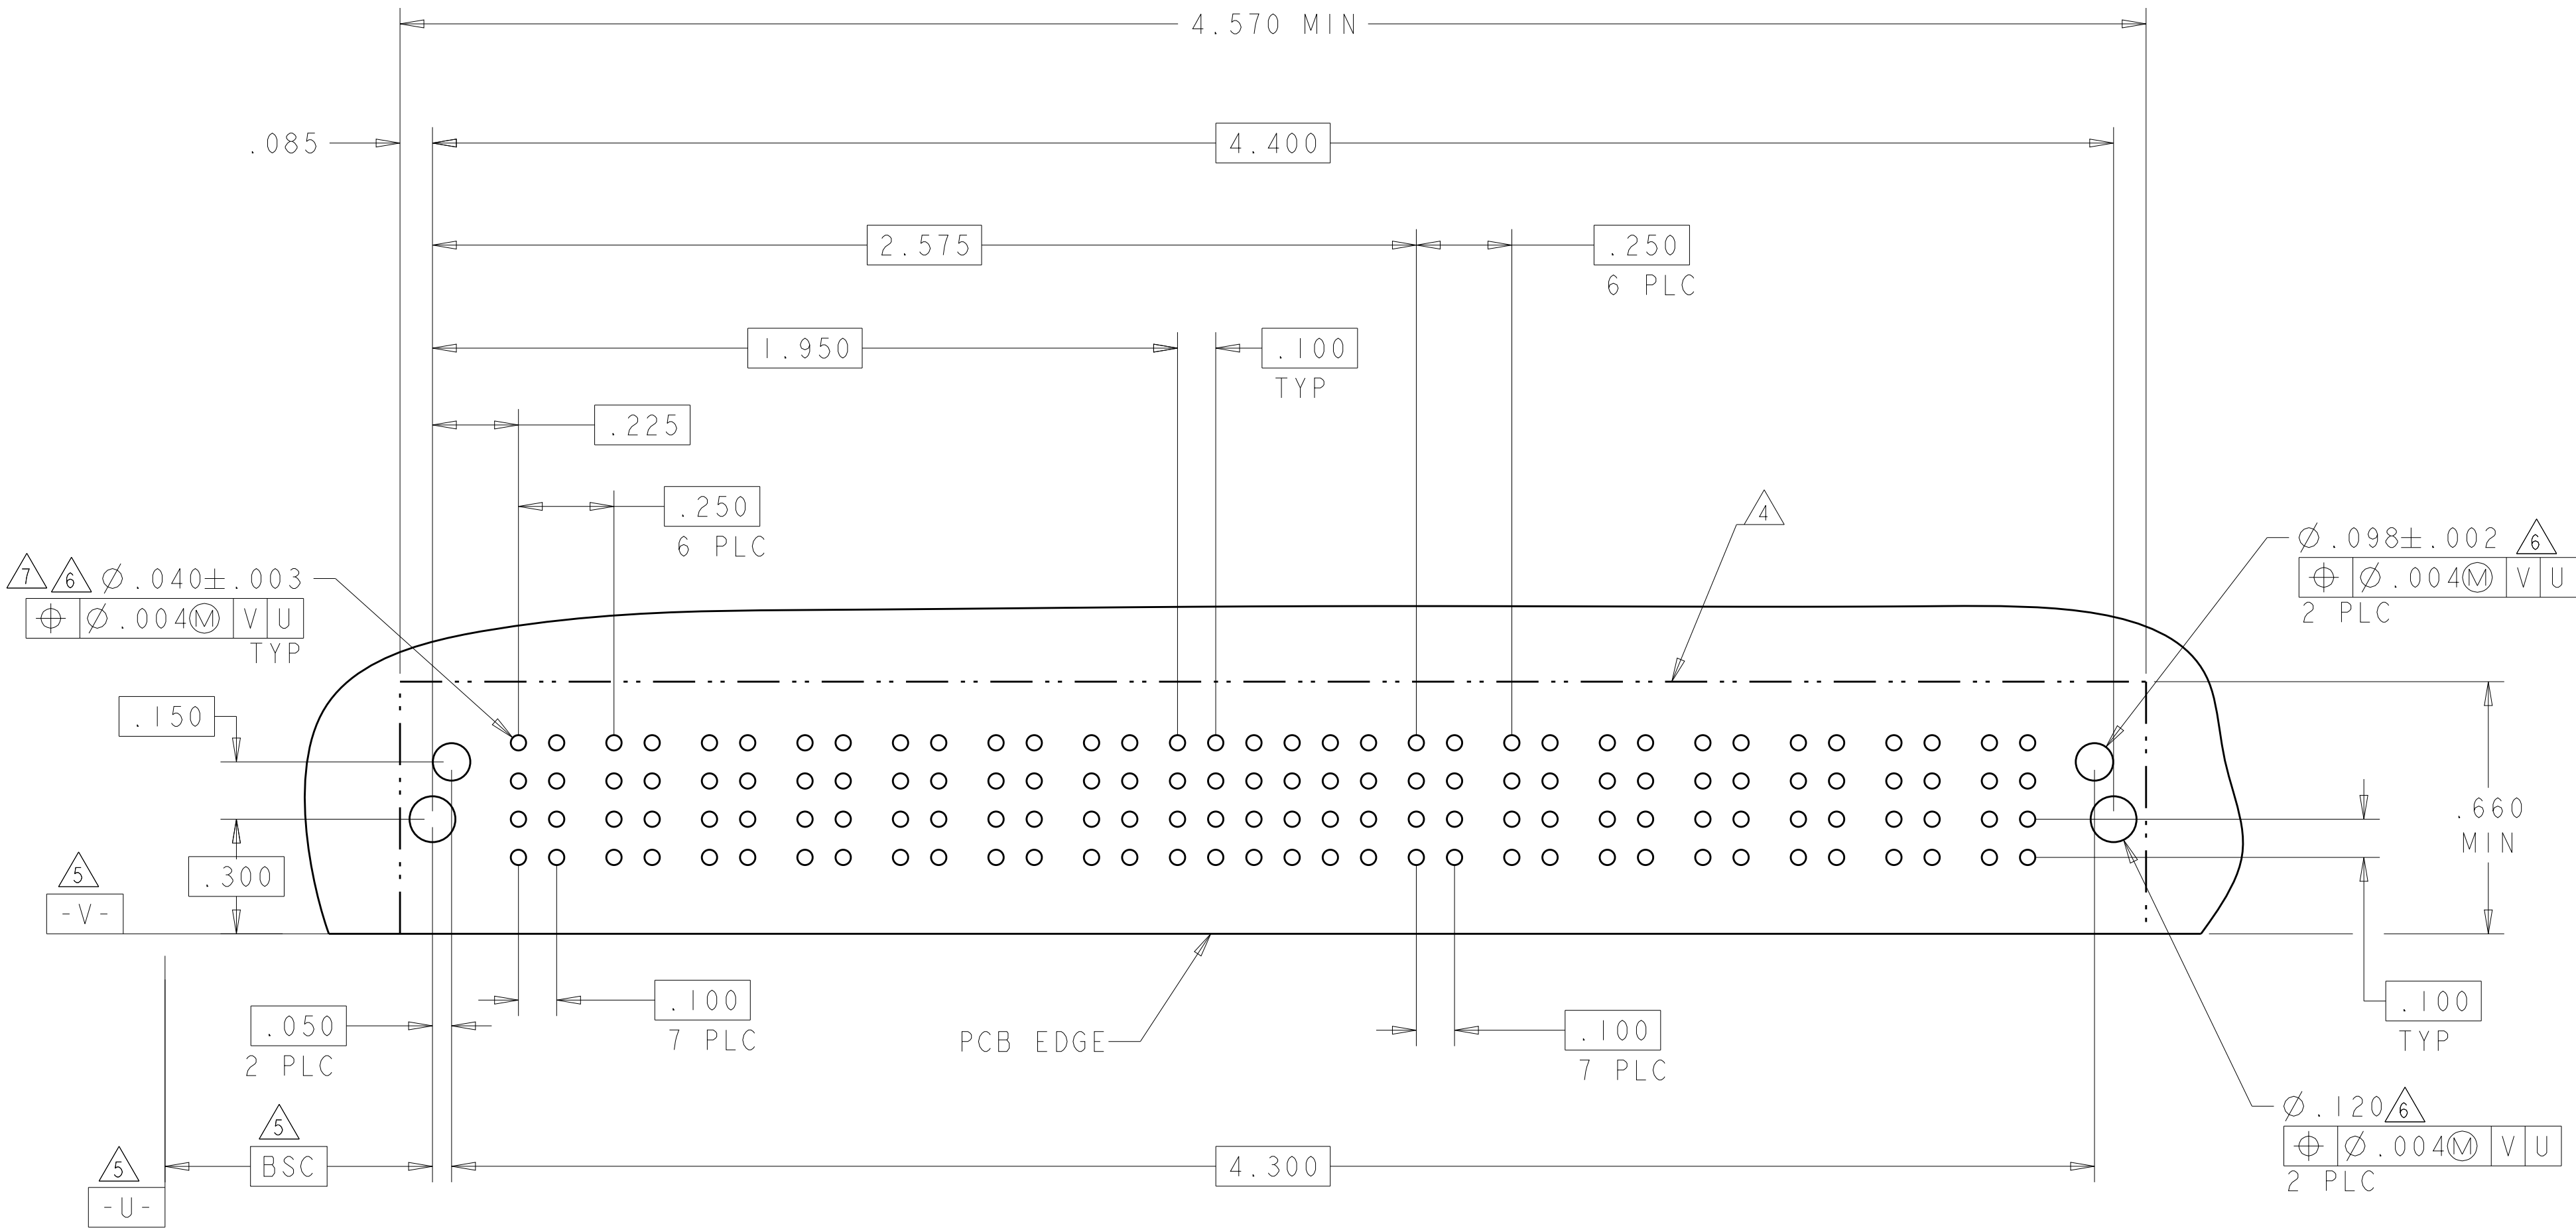

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH -

MATERIAL
-

CUSTOMER DRAWING

DWN
S.ZHAO
CHK
S.ZHAO
APVD
S.ZHAO

10APR2007
10APR2007
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

NAME
RIGHT ANGLE WITH SHORT GUIDES
AND LP CONTACTS ASSEMBLY
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450830

RESTRICTED TO
-


TE Connectivity

SCALE
4:1

SHEET
39


OF
42

REV
S2

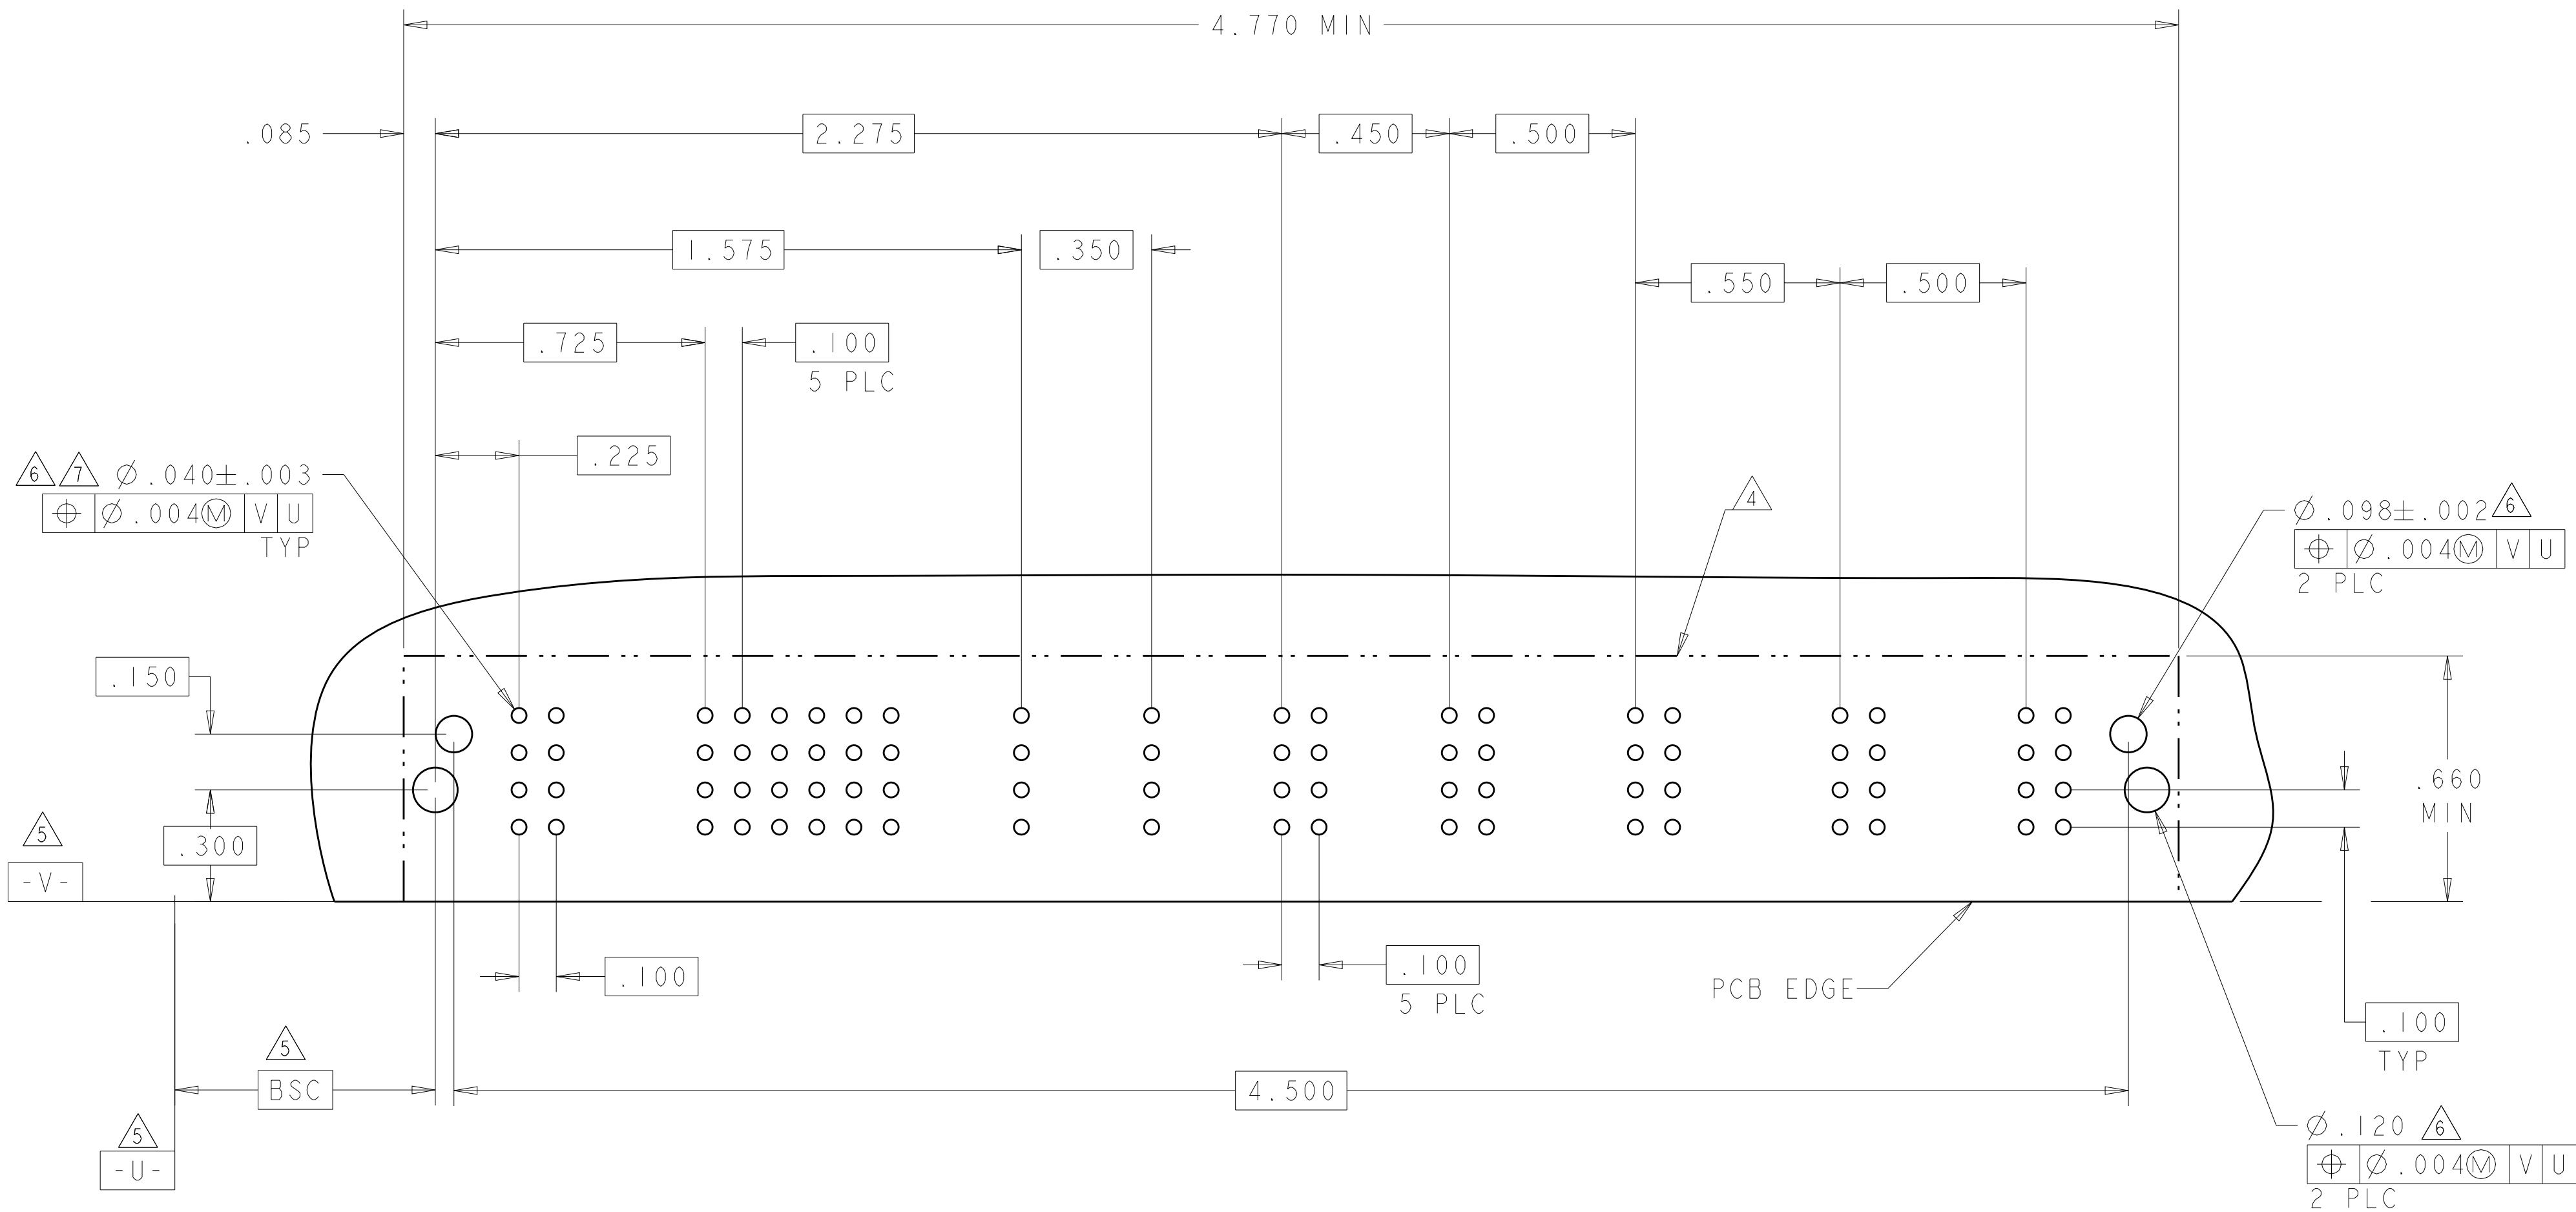4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL				POWER			
			P1	P2	P3	1	2	3	4	P4	P5	P6	
8-6450830-0	D		TM	TM	TM	J	J	J	J	TM	TM	TM	
	K					K	K	K					
	N					N	N	N					
	S					S	S	S					
3ACP + 16S + 3P													

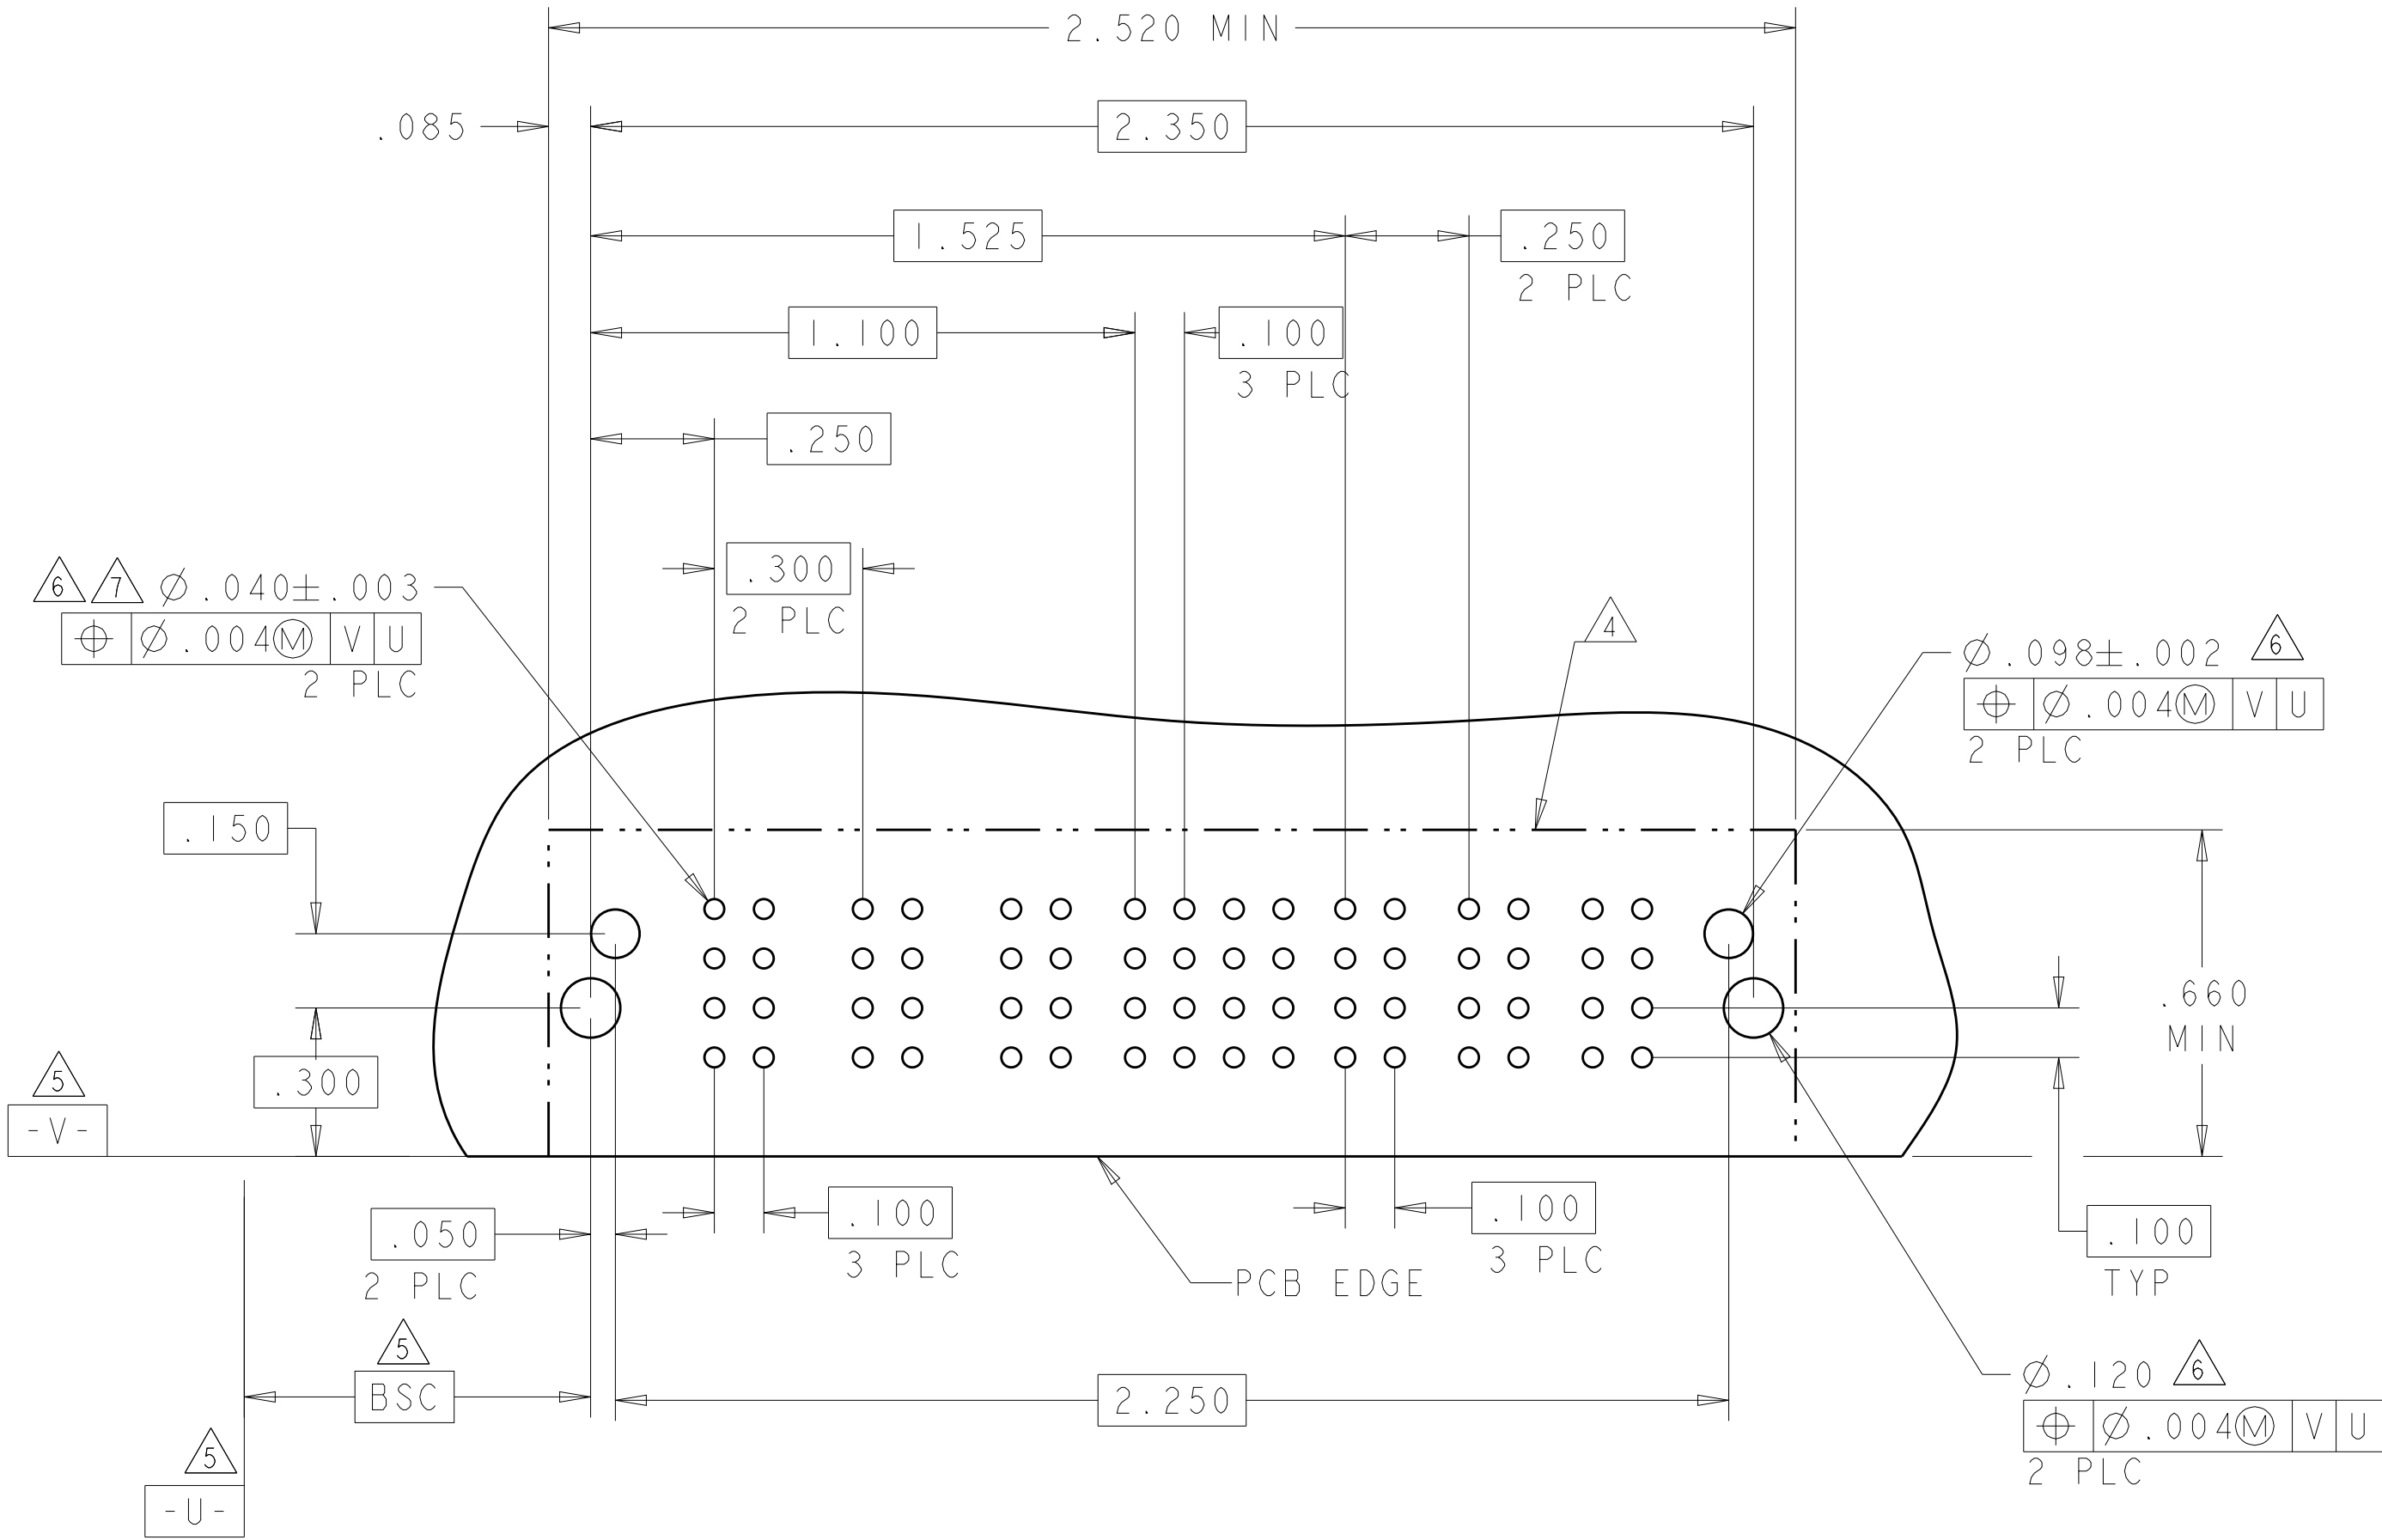

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO	10APR2007		
		CHK S. ZHAO	10APR2007		
DIMENSIONS: INCHES		APVD S. ZHAO	-	NAME RIGHT ANGLE WITH SHORT GUIDES AND LP CONTACTS ASSEMBLY MULTI-BEAM XLE	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC	
		0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES #2° FINISH		108-2292	
MATERIAL -		WEIGHT -		APPLICATION SPEC	
		CUSTOMER DRAWING		114-13251	
				SIZE A1	
				CAGE CODE 00779	
				DRAWING NO 6450830	
				RESTRICTED TO -	
				SCALE 4:1	
				SHEET 41	
				OF 42	
				REV S2	

- NO CONTACTS LOADED

