

PS 1161 Test Probe, Ø 2 mm, 6.3 A



Description

- Test Probe
- diameter 2.0 mm


Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [CE declaration of conformity](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [CAD-Drawings](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Diameter	2 mm	Resistance to Soldering Heat	260 °C / 5 sec acc. to IEC 60068-2-20 , Test Tb, method 1A
Rated Current	6.3 A	Weight	1.1 g
Contact resistance	< 7 mΩ at 20 mV	Material: Housing	Thermoplastic (PC), UL 94V-2
Allowable Operation Temp.	-25 °C to 70 °C	Surface of contacts	gold plated , Thickness 2.0 μm

Dimensions

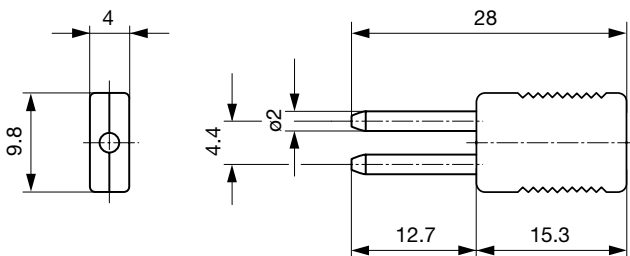

Diagrams



Variants

Product group	Color	Order Number
Test Probe	black	0040.1161
Test Probe	red	0040.1162

Mating Outlets/Connectors

Category / Description



[Test Jacks & Probes Overview complete](#)

PB 1151 Test Jack, PCB Mounting, Ø 2 mm, 6.3 A

PB 1151

[Test Jacks & Probes further types to PS 1161](#)