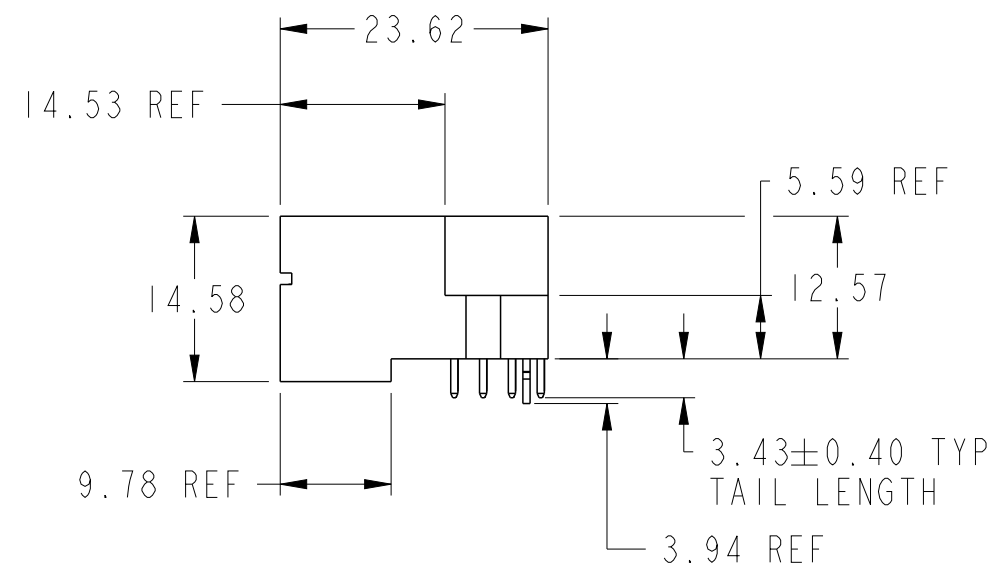
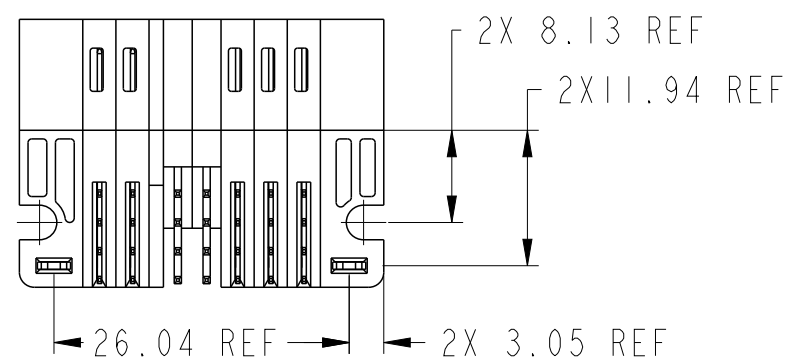
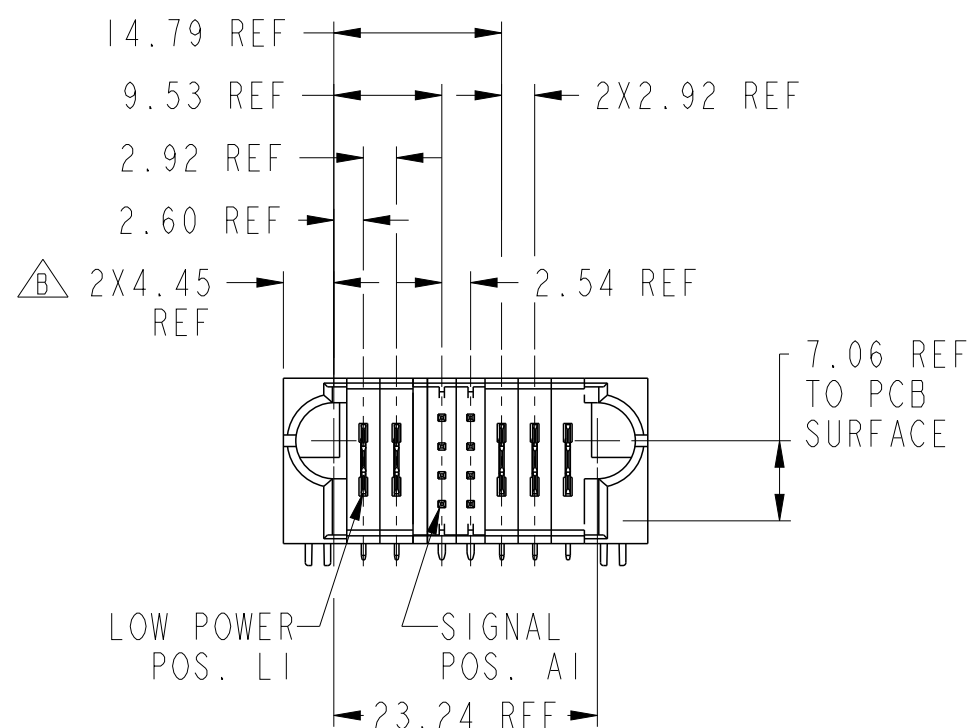
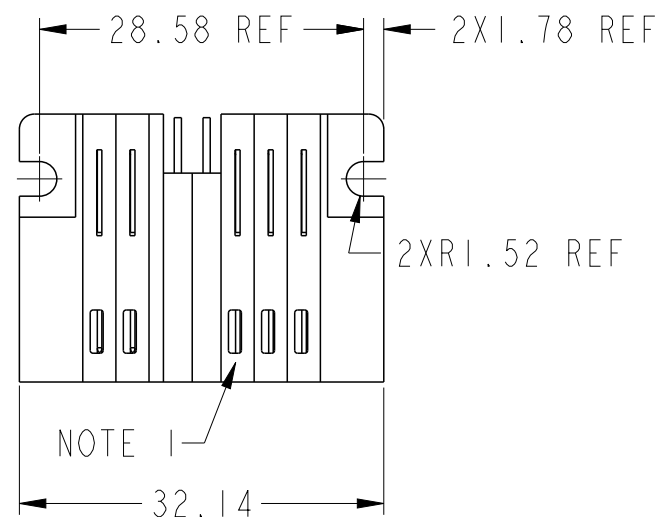





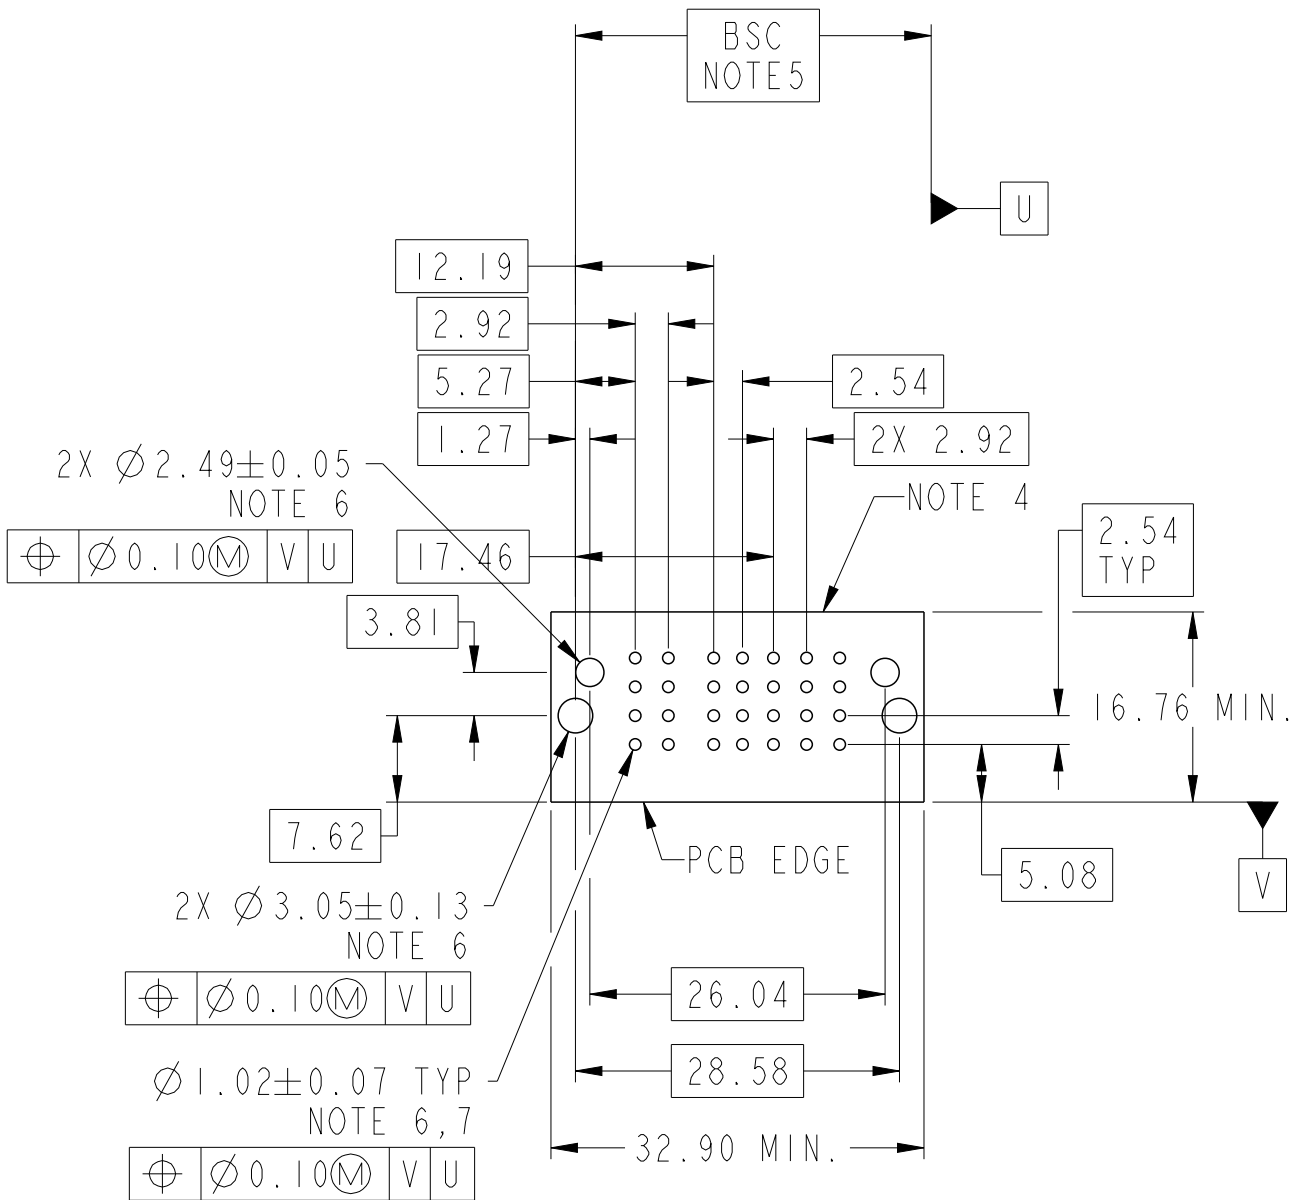


PRODUCT NUMBER SEE SHEET 2






spec ref		*		dr		Peng-Bing Fu		2012/06/04		projection				size		A3		scale		3:2																			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Peng-Bing Fu		2012/11/13						ecn no		ELX-DG-013143-1																							
chr				Shao-Qi Kuang		2012/11/15																																	
ASME Y14.5				appr		Pei-Ming Zheng		2012/11/15						product family				PwrBlade+				rel level				Released													
surface				linear		0.X		±0.5				title						2LP + 8S + 3LP						dwg no						10106262-0502001						rev		B	
ASME Y14.5				0.XX		±0.25																																	
0.XXX				±0.10																																			
angular		0°		±2°		www.fci.com		cat. no.						Product - Customer Drw						sheet 1 of 3																			

PRODUCT NO.	ROWS	LP		S	LP				
		E1	LP1	LP2	1	2	LP3	LP4	LP5
10106262-0502001LF	D C B A		LK LK		U T S R	U T S R	L J L J	L J L J	



CODE	DESCRIPTION
HA	METAL HOLD DOWN
LJ	MFBL LOW POWER CONTACT (3.43)
LK	STD LOW POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Peng-Bing Fu	2012/06/04		projection		size	A3	scale	3:2			
eng	Peng-Bing Fu	2012/11/13					ecn no	ELX-DG-013143-1				
chr	Shao-Qi Kuang	2012/11/15						Released				
appr	Pei-Ming Zheng	2012/11/15	product family			PwrBlade+	rel level					
			title			2LP + 8S + 3LP			dwg no	10106262-0502001	rev	B
www.fci.com			cat. no.			Product - Customer Drw			sheet 2 of 3			

A

B

C

D



A

B

C




D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE P/N CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
-  9) A  SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW, OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION



Copyright FCI.

dr	Peng-Bing Fu	2012/06/04	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2				
eng	Peng-Bing Fu	2012/11/13										
chr	Shao-Qi Kuang	2012/11/15										
appr	Pei-Ming Zheng	2012/11/15	product family		PwrBlade+	ecn no	ELX-DG-013143-1					
					rel level	Released						
<div></div>			title		2LP + 8S + 3LP		dwg no		10106262-0502001	rev	B	
RA STB HEADER												
www.fci.com			cat. no.		Product - Customer Drw				sheet 3 of 3			