


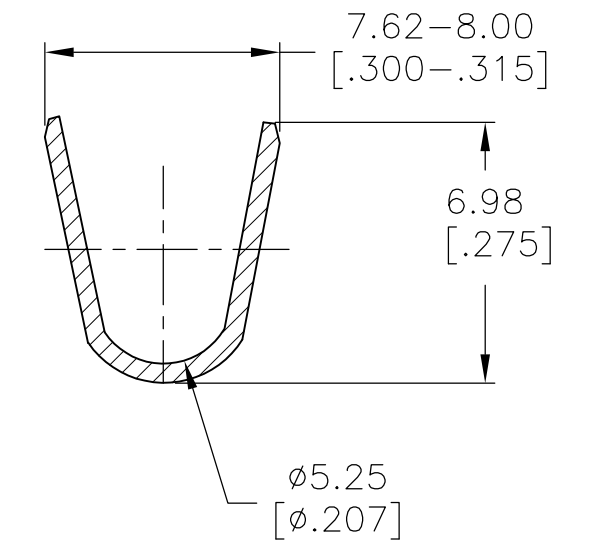


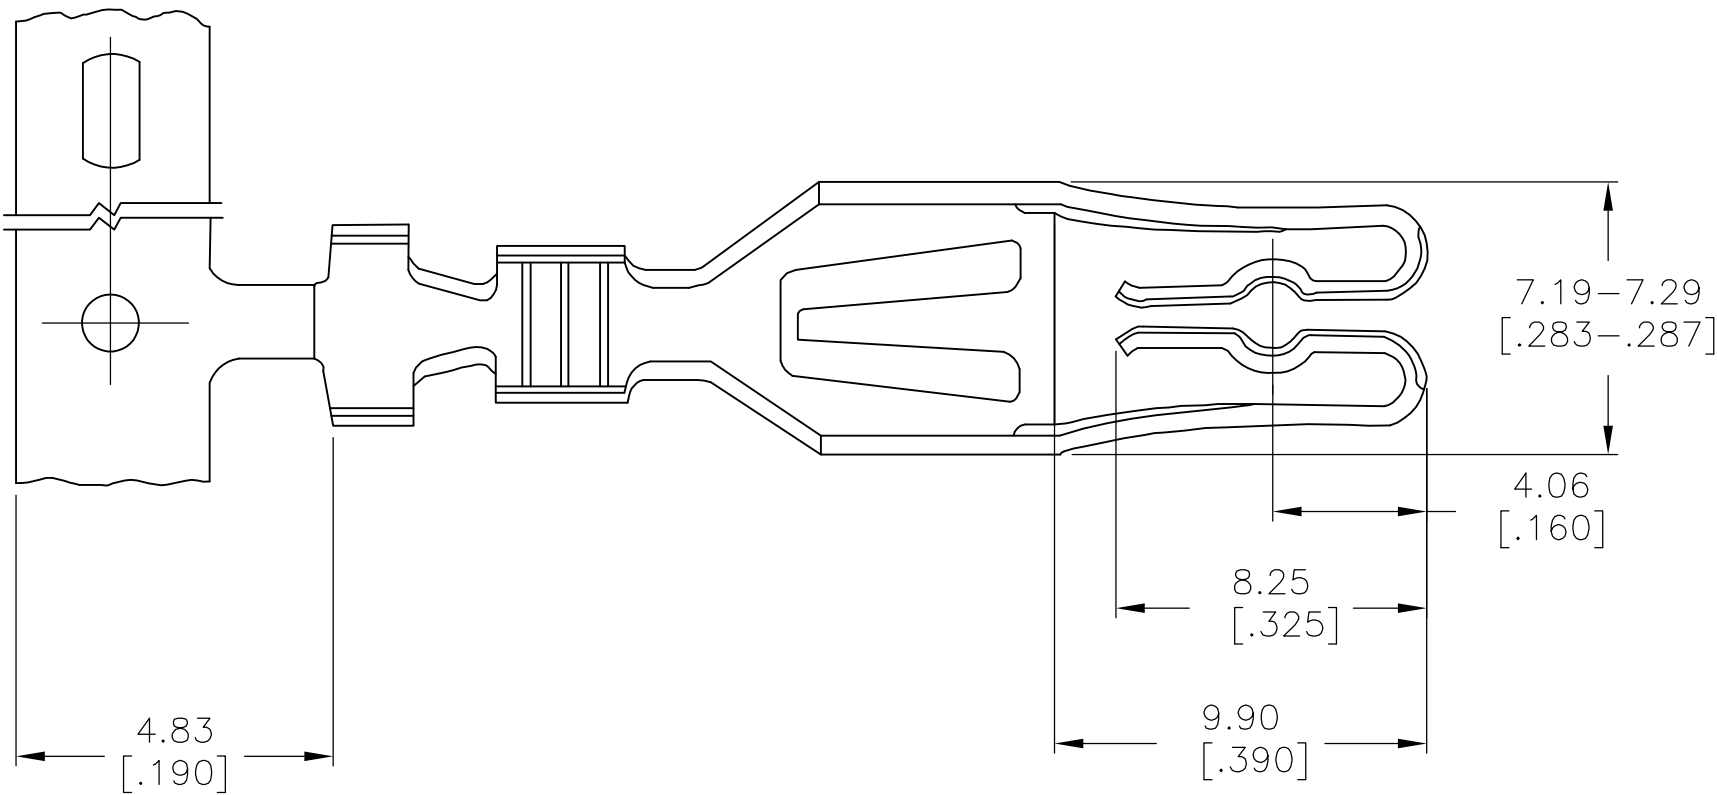

INSULATION 4.06-5.33
RANGE [.160-.210]
SECTION, A-A

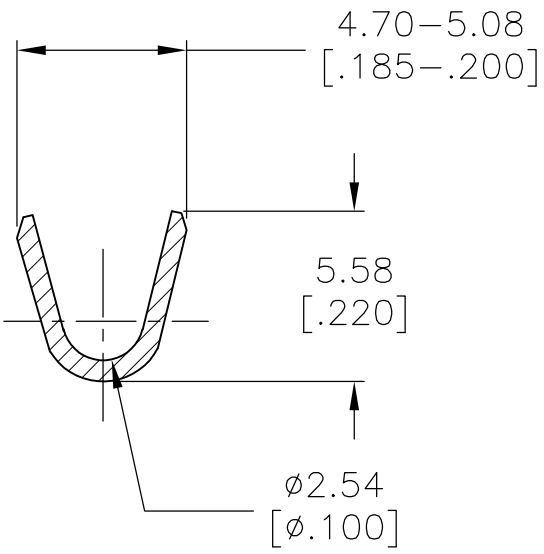

WIRE RANGE 10-12
SECTION, B-B

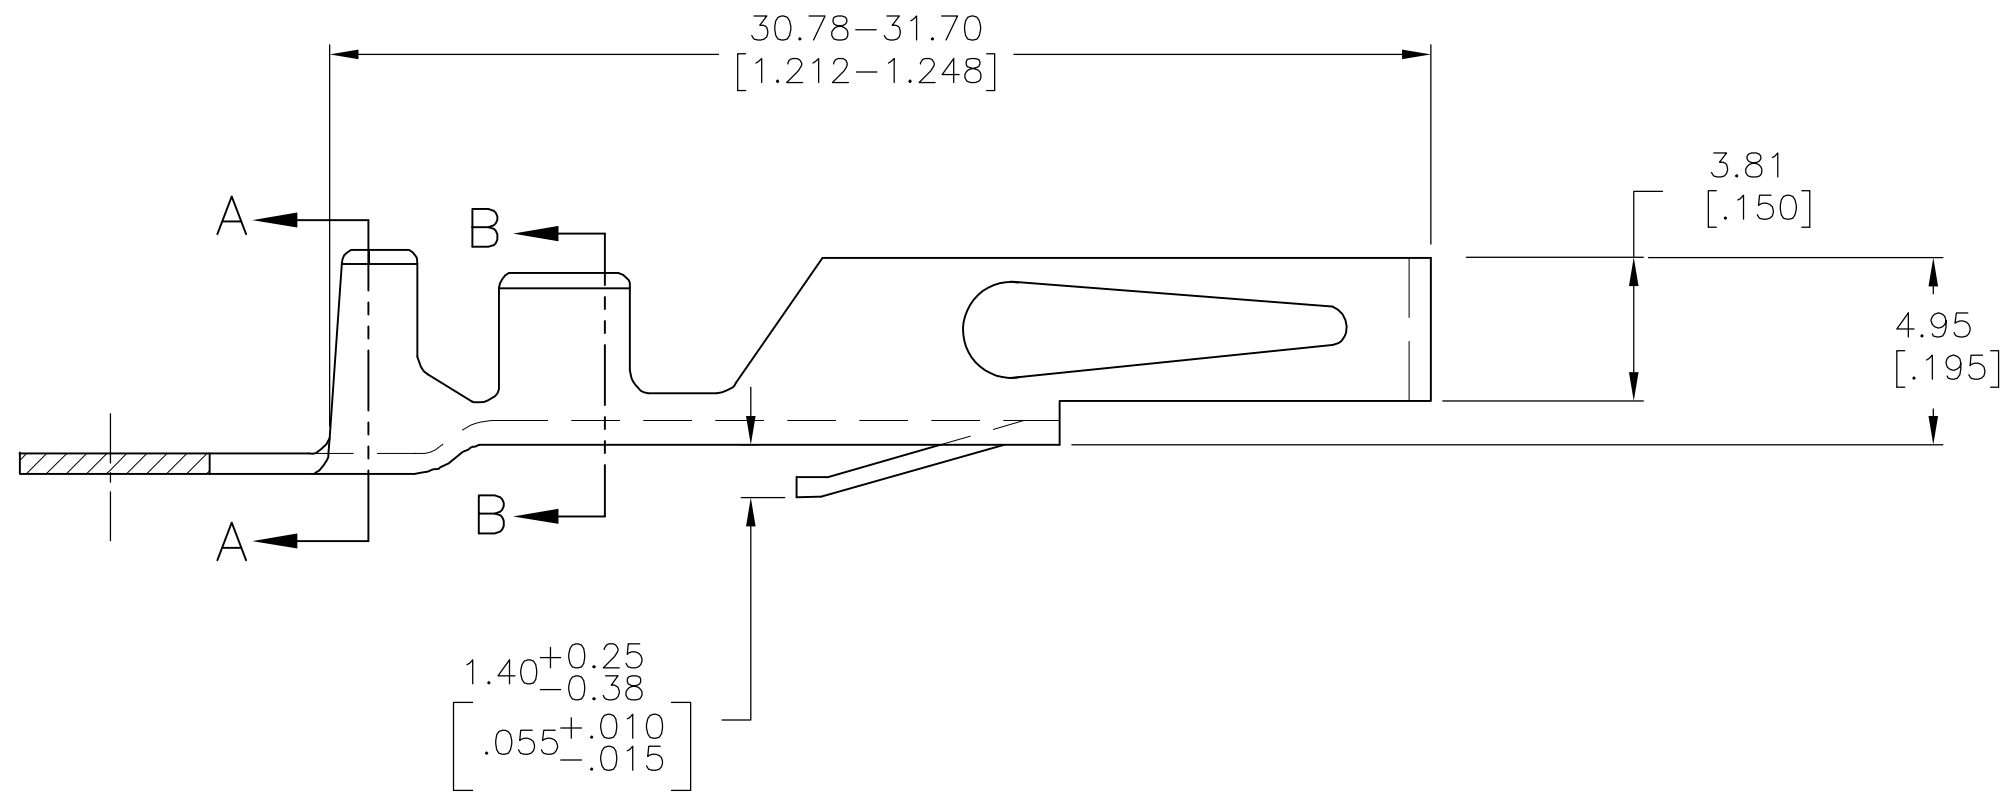

- 1 0.0038[.000150] BRIGHT TIN OVER 0.00076[.000030] NICKEL.
- 2 SILVER PLATE 0.0038[.000150] MIN THK ALL OVER.
- 3 0.0038[.000150] MATTE TIN OVER 0.00076[.000030] NICKEL.

3	5-530519-2
2	530519-3
1	530519-2
FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN — 15 MAY 75

CHK — 15 MAY 75

APVD — 16 MAY 75

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	-

MATERIAL

ALLOY CDA-194

FINISH

DWN — 15 MAY 75

CHK — 15 MAY 75

APVD — 16 MAY 75

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

0

CUSTOMER DRAWING

SCALE 5:1

TE Connectivity

CONTACT HIGH CURRENT STRIP
10-12 AWG

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=530519

RESTRICTED TO

—

SHEET

1 of 1

REV

J