


Axial Lead and Cartridge Fuses

Special Midget

1 3/8" Long Fast-Acting Type Fuse BLS Series



ELECTRICAL CHARACTERISTICS:

| % of Ampere Rating | Ampere Rating | Opening Time |
|--------------------|---------------|---------------------------|
| 135% | 2/10-10 | 1 hour, Maximum |
| 200% | 2/10-10 | 2 minutes, Maximum |

AGENCY APPROVALS: Listed by Underwriters Laboratories and Certified by CSA from 2/10 through 10 amperes.

INTERRUPTING RATING: 10,000 amperes at rated VAC.

PATENTED



ORDERING INFORMATION:

| Cartridge Catalog Number | Ampere Rating | AC Voltage Rating | Nominal Resistance Cold Ohms |
|--------------------------|---------------|-------------------|------------------------------|
| BLS 2/10 | .200 | 600 | 36 |
| BLS 4/10 | .400 | 600 | 13.24 |
| BLS 1/2 | .500 | 600 | 1.25 |
| BLS 3/4 | .750 | 600 | .591 |
| BLS 8/10 | .800 | 600 | .524 |
| BLS 1 | 1 | 600 | .746 |
| BLS 1 1/2 | 1.5 | 600 | .190 |
| BLS 1 5/10 | 1.6 | 600 | .180 |
| BLS 1 8/10 | 1.8 | 600 | .143 |
| BLS 2 | 2 | 600 | .2608 |
| BLS 3 | 3 | 600 | .128 |
| BLS 4 | 4 | 600 | .0464 |
| BLS 5 | 5 | 600 | .0330 |
| BLS 6 | 6 | 250 | .0182 |
| BLS 7 | 7 | 250 | .0145 |
| BLS 8 | 8 | 250 | .012 |
| BLS 10 | 10 | 250 | .00881 |

Slo-Blo® Indicating Type Fuse FLA Series



ELECTRICAL CHARACTERISTICS:


| % of Ampere Rating | Opening Time |
|--------------------|------------------------|
| 135% | 1 hour, Maximum |

AGENCY APPROVALS: Listed by Underwriters Laboratories.

INTERRUPTING RATING: 10,000 amperes at rated VAC.

INDICATING PIN: Extends 0.3" when fuse opens.

NOTE: Fuses rated 12-30 amperes have dual tube construction.

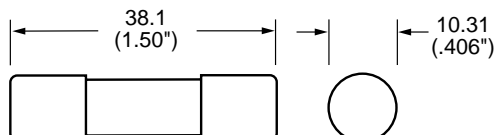

ORDERING INFORMATION:

| Catalog Number | Ampere Rating | Nominal Resistance Cold Ohms | Catalog Number | Ampere Rating | Nominal Resistance Cold Ohms | AC Voltage Rating |
|----------------|---------------|------------------------------|----------------|---------------|------------------------------|-------------------|
| FLA 1/10 | .100 | 200.0 | FLA 5 | 5 | .06304 | 125 |
| FLA 15/100 | .15 | 88.90 | FLA 5 5/10 | 5.6 | .05194 | 125 |
| FLA 2/10 | .200 | 50.00 | FLA 6 | 6 | .04253 | 125 |
| FLA 1/4 | .250 | 32.00 | FLA 6 1/4 | 6.25 | .03794 | 125 |
| FLA 3/10 | .300 | 22.20 | FLA 7 | 7 | .03146 | 125 |
| FLA 4/10 | .400 | 11.39 | FLA 8 | 8 | .01890 | 125 |
| FLA 1/2 | .500 | 8.00 | FLA 10 | 10 | .01387 | 125 |
| FLA 6/10 | .600 | 5.55 | FLA 12 | 12 | .00689 | 125 |
| FLA 8/10 | .800 | 3.65 | FLA 15 | 15 | .00530 | 125 |
| FLA 1 | 1 | 1.9504 | FLA 20 | 20 | .00385 | 125 |
| FLA 1 1/8 | 1.125 | 1.7004 | FLA 25 | 25 | .00275 | 125 |
| FLA 1 1/4 | 1.250 | 1.4004 | FLA 30 | 30 | .00226 | 125 |
| FLA 1 1/10 | 1.4 | 1.1204 | | | | 125 |
| FLA 1 1/2 | 1.5 | .8204 | | | | 125 |
| FLA 1 5/10 | 1.6 | .7027 | | | | 125 |
| FLA 1 8/10 | 1.8 | .5637 | | | | 125 |
| FLA 2 | 2 | .4627 | | | | 125 |
| FLA 2 1/4 | 2.25 | .3557 | | | | 125 |
| FLA 2 1/2 | 2.5 | .2599 | | | | 125 |
| FLA 2 8/10 | 2.8 | .2048 | | | | 125 |
| FLA 3 | 3 | .1816 | | | | 125 |
| FLA 3 2/10 | 3.2 | .1587 | | | | 125 |
| FLA 3 1/2 | 3.5 | .1195 | | | | 125 |
| FLA 4 | 4 | .09772 | | | | 125 |
| FLA 4 1/2 | 4.5 | .07875 | | | | 125 |