

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** **0764551108**  
**Status:** **Active**  
**Overview:** Impact™ Backplane Connector and Cable Assembly System  
**Description:** Impact™ 100 Ohm 2 Pair Vertical Backplane Header, Unguided, Open Endwall, 10 Columns, 60 Circuits, Pin Length 5.50mm, Plated Through Hole Dimension 0.39mm, Lead-Free

**Documents:**

[3D Model](#)  
[Drawing \(PDF\)](#)  
[Product Specification PS-76060-999 \(PDF\)](#)  
[Application Specification AS-76060-990 \(PDF\)](#)  
[RoHS Certificate of Compliance \(PDF\)](#)

**Agency Certification**


UL E29179

**General**

Product Family Backplane Connectors  
Series [76455](#)  
Application Conventional  
Application Tooling Documents TM-622018799  
Component Type PCB Header  
Overview [Impact™ Backplane Connector and Cable Assembly System](#)  
Product Name Impact™  
UPC 883906528713

**Physical**

Circuits (Loaded) 60  
Circuits (maximum) 60  
Color - Resin Black  
Durability (mating cycles max) 200  
First Mate / Last Break No  
Flammability 94V-0  
Guide to Mating Part No  
Keying to Mating Part None  
Material - Metal High Performance Alloy (HPA)  
Material - Plating Mating Gold  
Material - Plating Termination Tin  
Material - Resin High Temperature Thermoplastic  
Net Weight 1.674/g  
Number of Columns 10  
Number of Pairs 2  
Number of Rows 6  
Orientation Vertical  
PC Tail Length 1.40mm  
PCB Locator No  
PCB Retention None  
PCB Thickness - Recommended 1.00mm  
Packaging Type Tray  
Pitch - Mating Interface 1.90mm  
Pitch - Termination Interface 1.90mm  
Plating min - Mating 0.762µm  
Polarized to PCB No  
Stackable No  
Surface Mount Compatible (SMC) No  
Temperature Range - Operating -55°C to +85°C  
Termination Interface: Style Through Hole - Compliant Pin

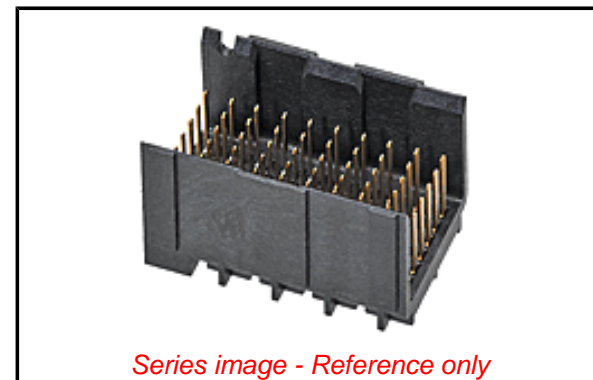

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Compliant**

**REACH SVHC**

Contains SVHC(2014 December 17): No

**Halogen-Free**

**Status**

**Low-Halogen**

**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS  
ELV

China RoHS  
Green Image  
Not Relevant

**Search Parts in this Series**

[76455 Series](#)

**Mates With**

[76460 Impact™ 100 Ohm Daughtercard](#)

**Use With**

[75234 Backplane Free Standing Guide Pin](#)

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

Description	Product #
Backplane Insertion Tool for Signal Contact	<a href="#">0621005800</a>
Backplane Header Removal Tool for	<a href="#">0621009610</a>

**Electrical**

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100#
Shield Type	N/A
Shielded	No
Voltage - Maximum	30V AC (RMS)/DC

**Solder Process Data**

Lead-free Process Capability	N/A
------------------------------	-----

**Material Info****Reference - Drawing Numbers**

Application Specification	AS-76060-990
Electrical Model Document	EE-76460-0001
Product Specification	PS-76060-999
Sales Drawing	SD-76455-001
Symbol/Footprint Data	SYM-76455-1108

GbX-U™, I-Trac™,  
Impact™, or TinMan  
Backplane Module 0622018692  
Installation Press-In  
Tool for 2-Pair by 10-  
Column Assemblies

This document was generated on 06/30/2015

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**