

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0019092026](#)
Status: **Active**
Overview: [standard_093](#)
Description: 2.36mm (.093") Diameter Standard .093" Pin and Socket Plug Housing With Positive Latch, UL 94V-0, 2 Circuits

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)

[Packaging Specification \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
TUV	R72081037
UL	E29179

General

Product Family	Crimp Housings
Series	3191
Comments	Polarized to Mating Part, Without Mounting Ears
Overview	standard_093
Product Name	Standard .093"

Physical

Breakaway	No
Circuits (maximum)	2
Color - Resin	Natural
Flammability	94V-0
Gender	Dual
Glow-Wire Compliant	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.264 In
Pitch - Mating Interface (mm)	6.71 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Electrical


Current - Maximum per Contact	12A
-------------------------------	-----

Material Info

Old Part Number	3191-2P1-201
-----------------	--------------

Reference - Drawing Numbers

Sales Drawing	SD-3191-2*
---------------	------------

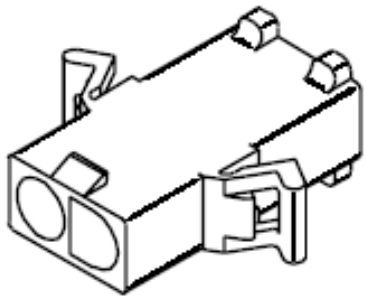

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**
**REACH SVHC
Not Reviewed**
**Halogen-Free
Status**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series


[3191](#)Series

Mates With


[3191](#) Pin and Socket Recptacle, [5219](#)
Vertical PCB Header

Use With




[1189](#) Crimp Terminals, [1190](#) Crimp Terminals, [1380](#) Male Crimp Terminals, [1381](#) Female Crimp Terminals, [1433](#) Crimp Terminals, [1434](#) Male Crimp Terminals, [2605](#) , [2606](#) , [1973](#) , [2151](#) , [2273](#) , [2870](#) , [2871](#) , [4272](#) , Lin

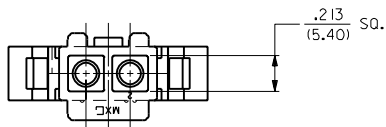

PREBENT MOUNTING EAR
(WHEN SPECIFIED)



CIRCUIT NUMBER
IDENTIFICATION RIBS

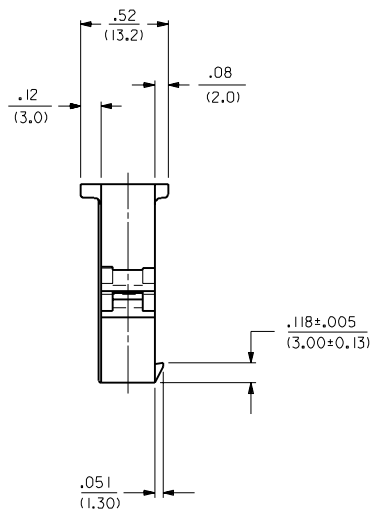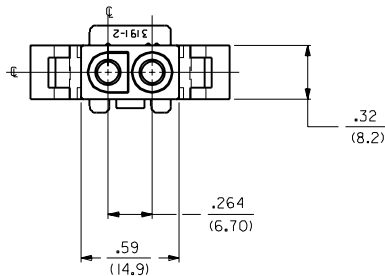

PLUG

DIMENSIONS SHOWN (METRIC) INCH		TITLE	
UNLESS OTHERWISE SPECIFIED: TOLERANCES: ANGULAR ± .004 TO		.093/(2.36) HOUSING, PLUG AND RECEPTACLE, 2 CKT ±.264/(6.70) CTRS.	
INCH METRIC		SEE CHART	
3 PLACE ± .010 ---		SHEET NO. DATE	
2 PLACE ± .014 ± 0.25		1 of 3 11/21/88	
1 PLACE --- ± 0.35		MOLEX INCORPORATED	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		LIT/LEJLL 60532 U.S.A.	
DRWG. BY CEP		DRWG. NO. SD-3191-2*	
CHKD. BY RW		FILE NAME S31912X1	
APP'D. BY RAS		SCALE 2 : 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	

E4	REVISED UCR1988-0148 WANG 98-04-15	
E3	ADD RAMP DIM'S ECN #U4 0293 3-1-94 RW	
E2	X-REMOVE ECR U3 0001 OK 12/30/92	RW
E1	REL. RED VERSIONS ECR U1 2167 OK 1/24/92	RW
E	REV. MATL. CODE ECR # U90901 KBW 07-25-89 RW	
D	REV. & REDRAWN ECR UB 1858 CEP 11-21-88 RW	
C		
B		
A		

3	E2
2	D
1	E4
SH. REV.	LTR. REVISIONS

NO P.S.

