


REV.	ECO NO.	DESCRIPTION	RELEASED BY	DATE
A	3120	INITIAL RELEASE	BAD	9/5/02

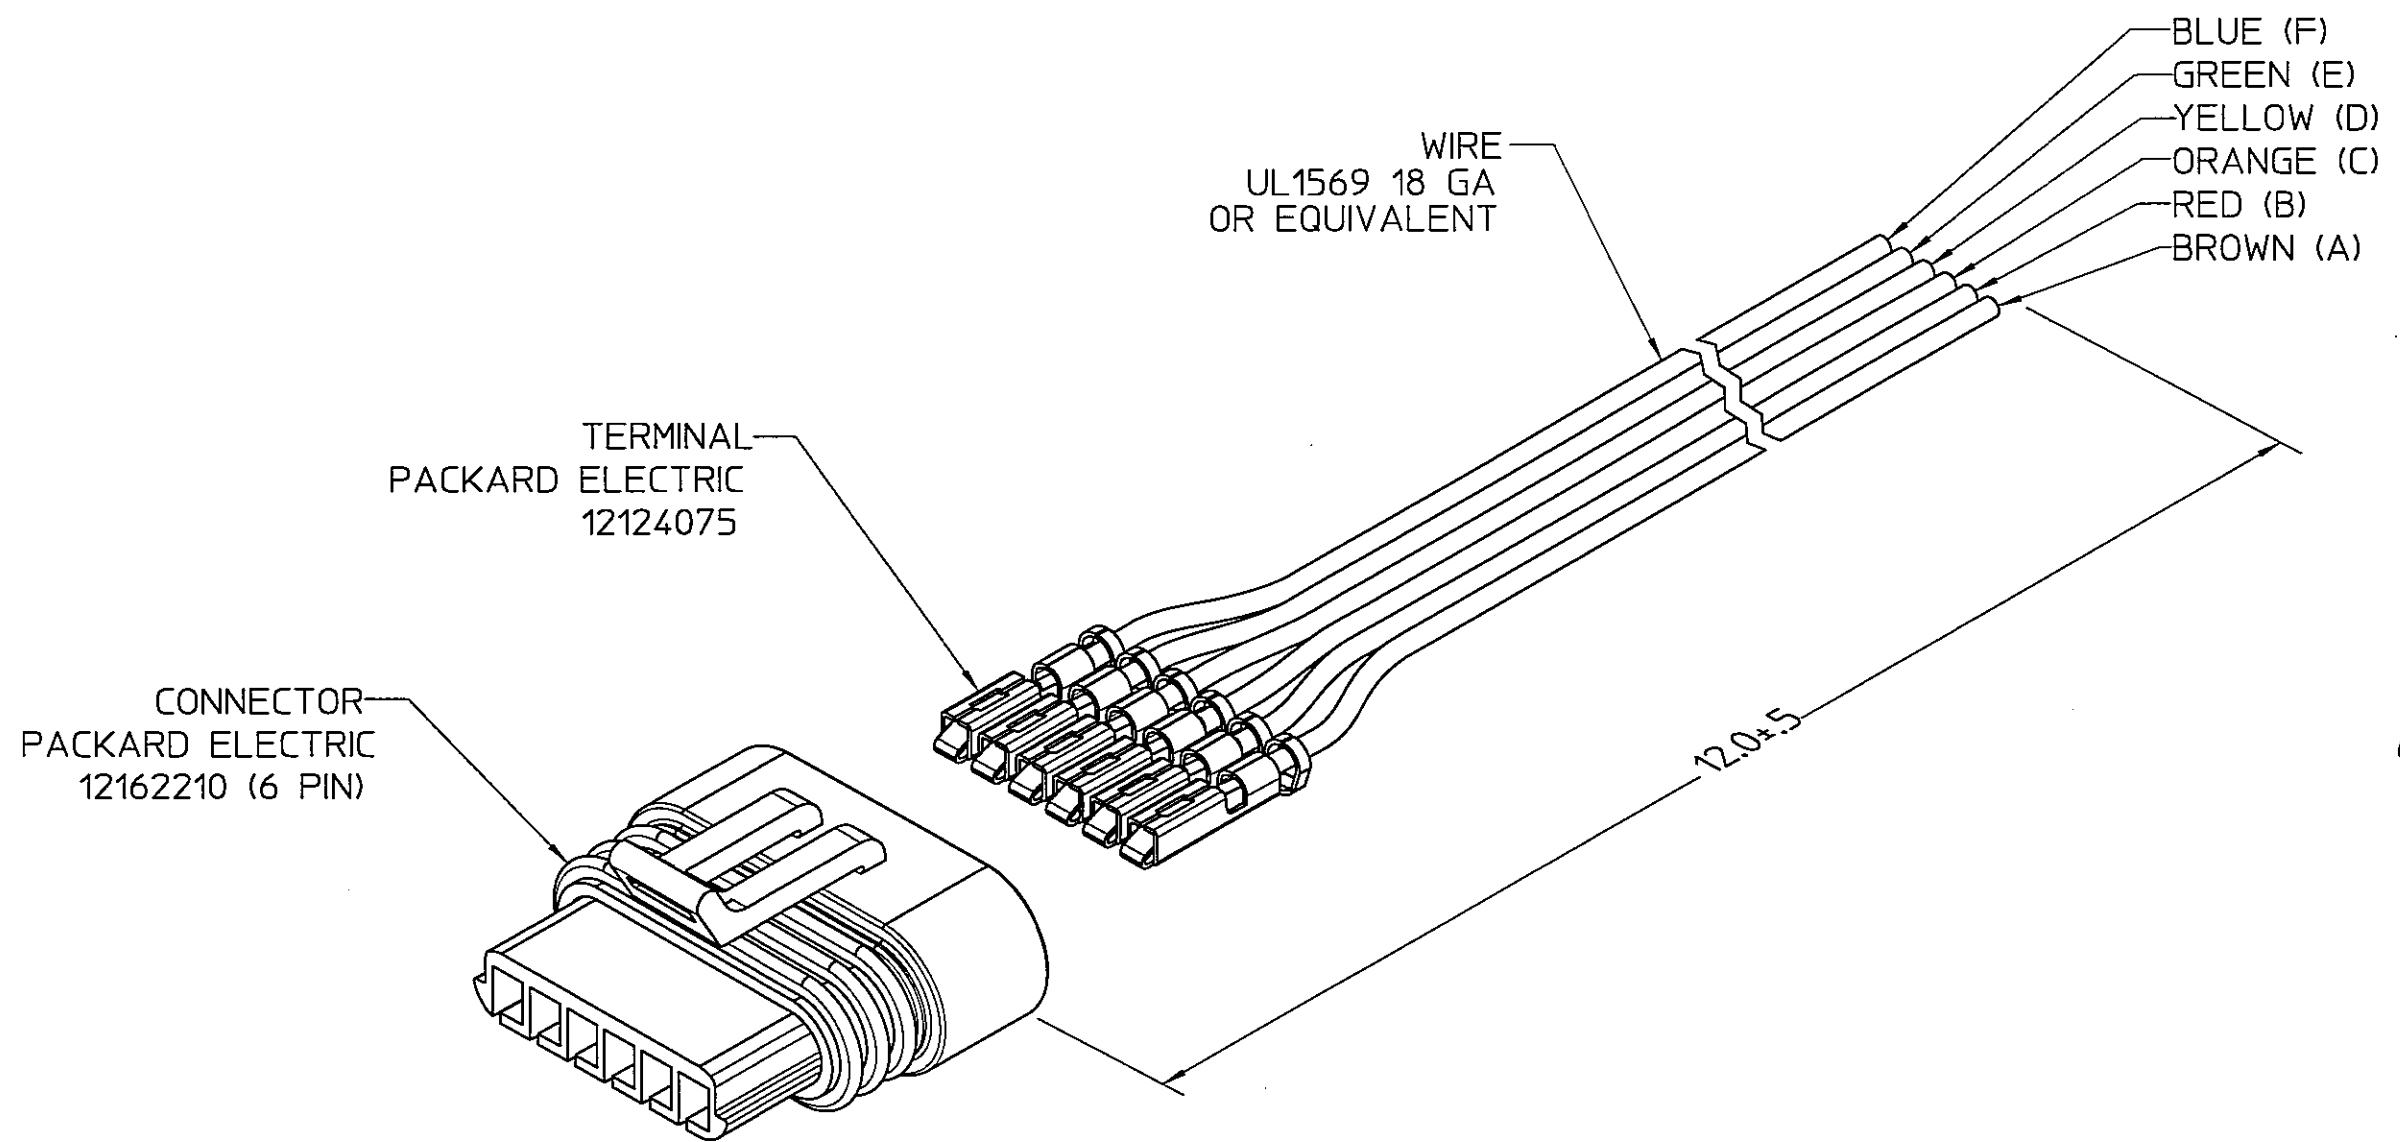

UNCONTROLLED DOCUMENT

PURCHASED ASSY

1. EXPLODED VIEW SHOWN FOR CLARITY.

- C** IDENTIFIES FEATURES THAT ARE DESIGNATED SIGNIFICANT BY CUSTOMER.
- SIG** IDENTIFIES FEATURES THAT SIGNIFICANTLY AFFECT FIT OR FUNCTION AND WHICH REQUIRE ADDITIONAL CONTROL PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.
- SPC** IDENTIFIES FEATURES THAT SHALL BE MONITORED FOR PROCESS CONTROL AND FOR WHICH STATISTICAL DATA SHALL BE SUBMITTED PER THE DUNCAN ELECTRONICS QUALITY SYSTEM DOCUMENTATION.

NOTES: UNLESS OTHERWISE SPECIFIED

This document and all information contained herein are proprietary and are the sole property of BEI Duncan Electronics Division and shall not be reproduced or disclosed without written authorization. Use of this information for the purpose of manufacture does not constitute the release of the proprietary rights thereto.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES PER ASME Y14.5M		THIRD ANGLE PROJECTION		BEI DUNCAN ELECTRONICS DIVISION BEI TECHNOLOGIES, INC. DUNCAN ELECTRONICS DIVISION, 15771 RED HILL AVENUE, TUSTIN, CA 92780-7303	
TOLERANCES ARE:		APPROVALS	DATE	TITLE	
DECIMALS	ANGLES			CABLE ASSY	
.XX ±.010	± 1°	DRAWN	03/Sep/02	MODEL 9860	
.XXX ±.005		CHECKED	4 SEPT 02	SIZE	CAGE CODE
.XXXX ±.0005		DESIGN ENG	4 SEPT 02	B	11534
DIAMETERS SHOWN ON COMMON CENTERS	<input checked="" type="checkbox"/> .005	ENG. APPROVAL	9/4/02	DWG NO.	1-173
FEATURES SHOWN ON COMMON CENTERS	<input checked="" type="checkbox"/> .005			REV.	A
INSIDE/OUTSIDE RADIUS .005 MAX.				SCALE	PAGE 1 OF 1
DO NOT SCALE DRAWING				2X	