



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing

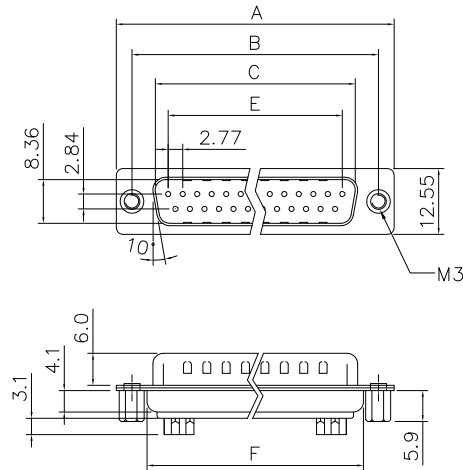


Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	19.20
15	39.20	33.30	25.25	19.39	27.70
25	53.04	47.04	38.96	33.24	41.10
37	69.40	63.50	55.42	49.86	57.30

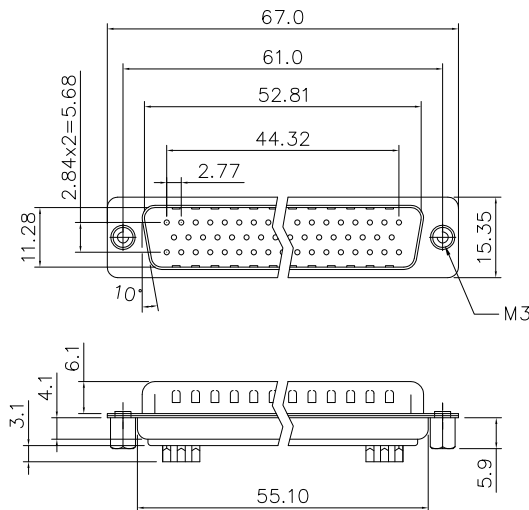

50 Positions



REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	07/30/09	IP
2	HK--	Update The Drawing	03/21/12	IP
3	HK--	Update The Drawing	01/22/15	IP

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" Tin Over 50u" min nickel over 50u" min Copper
BODY : Glass-Filled Thermoplastic PBT, UL94V-0, color Black
CONTACTS : Copper alloy
Gold Flash over 50u" Nickel on mating area
100u" Tin over 50u" Nickel on solder area
REAR NUT: Copper alloy, Nickel Plated
ELECTRICAL : Voltage rating : 250 V Rms
Current Rating : 3 AMP
Withstanding Voltage : 1000 V AC/rms
Insulation resistance : 1000 MΩ min
Contact resistance : 20 mΩ max
MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 717 SD X G XX P

L: RoHS Compliant

717: Tinned shell
+ Dimples for plug

SD : Standard Density

Shell Size :E,A,B,C,D

Contact type:
P = pin

Configuration:
SD : 9,15,25,37,50

Rear mounting type:
G = rear insert M3

UNLESS OTHERWISE SPECIFIED TOLERANCES

	U.S.	METRIC
.X	+/-	0.50
.XX	+/-	0.30
.XXX	+/-	0.20
FRACTIONS	+/-	
ANGLES	+/-	5°

FOR MATERIALS AND FINISHES SEE NOTES


REMOVE SHARP EDGES

DIMENSIONS	
U.S.	INCHES
METRIC	MM

APPROVAL		DATE
DRAWN	Felix Liu	01/22/15
CHECKED	Tony Tang	01/22/15
CHECKED		

DRAWING FILE :

ANGLE OF PROJECTION



Amphenol

Amphenol East Asia Limited

TITLE

Stamped and formed contact,SD Series

SIZE	DRAWING NO.	REV.
A4	L717SDXGXXP	3
SCALE	NONE	SHEET 1 OF 1