
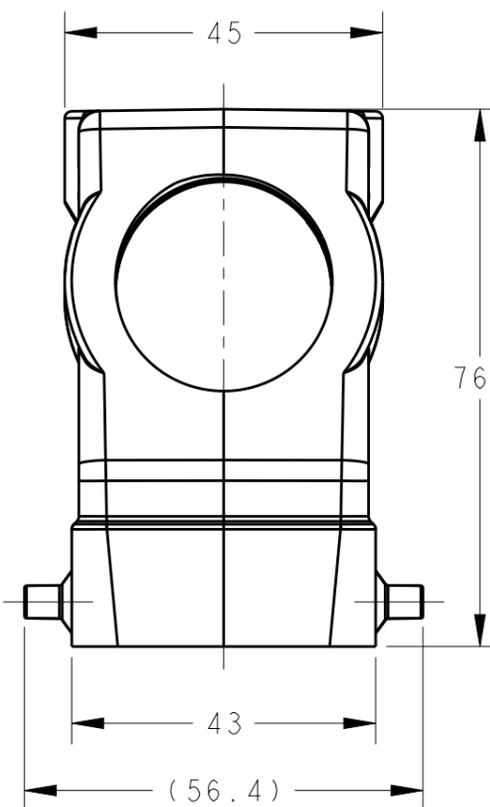




REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	01JUN2015	DW	CW

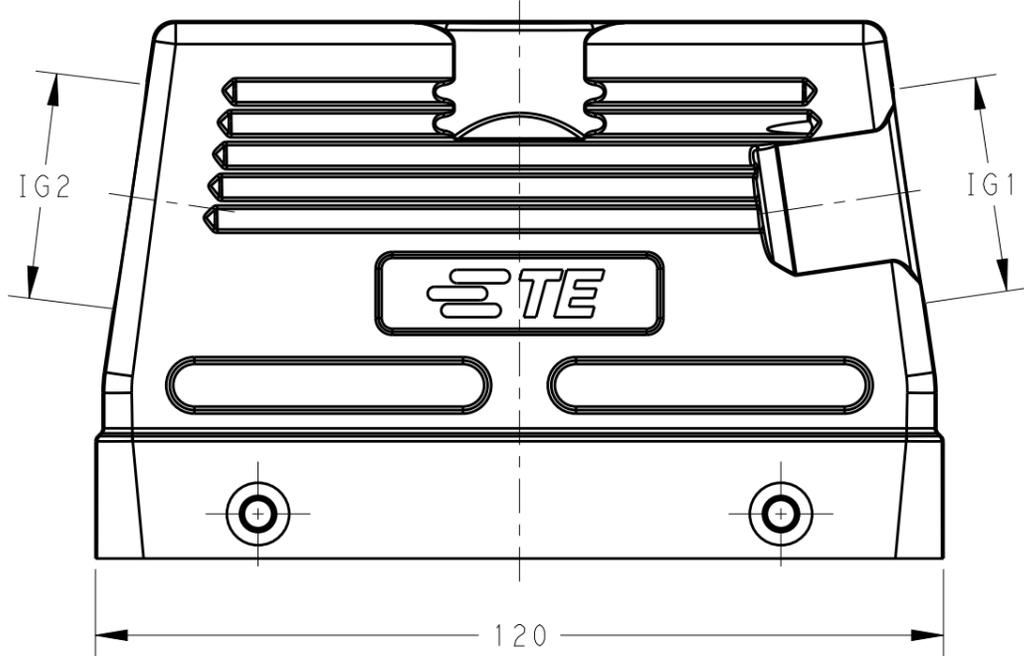

NOTES:
 1. TECHNICAL CHARACTERISTICS:
 HOOD MATERIAL: DIE CAST ALUMINIUM ALLOY
 SURFACE: POWDER COATED, GREY
 OPERATION TEMPERATURE: -40-+125°C
 DEGREE OF PROTECTION: IP65 (MATED)

注释:
 1. 技术参数:
 上壳材料: 铝合金
 表面处理: 粉末涂层, 灰色
 工作温度: -40-+125°C
 防护等级: IP65(配合)

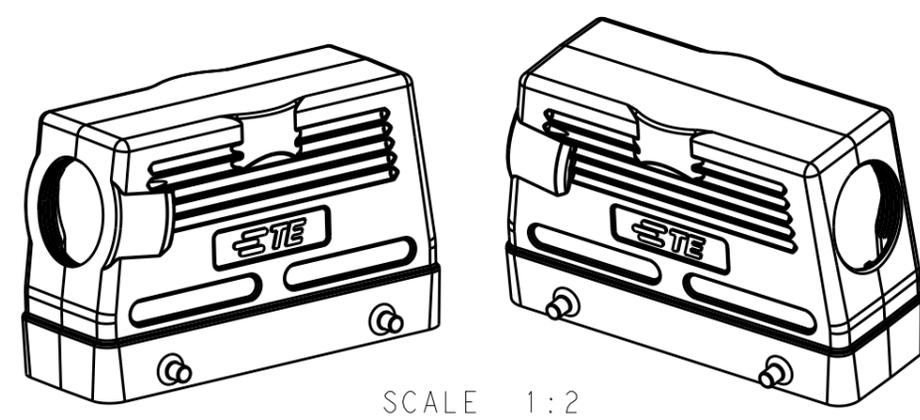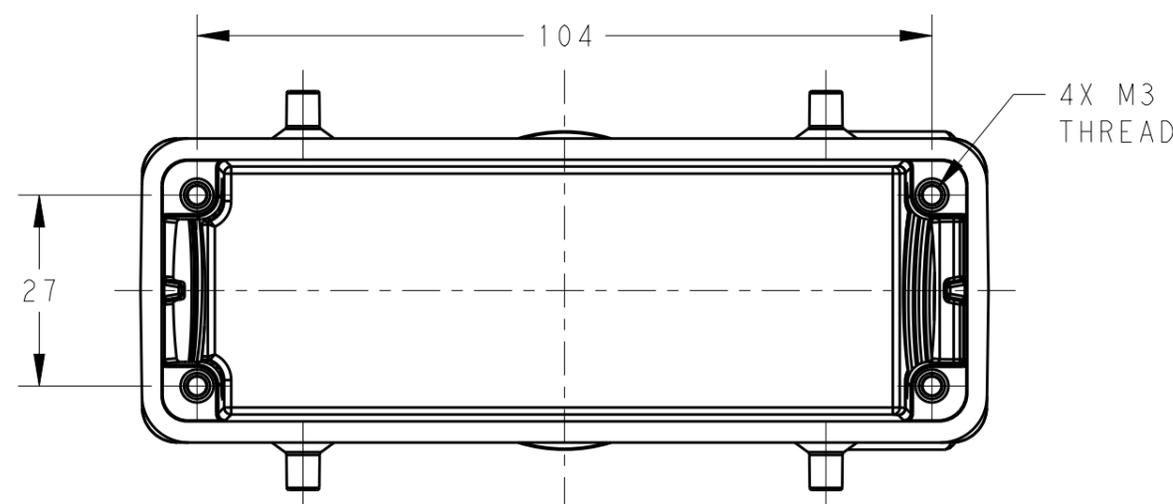

T1230240221-000	H24B-TSH-2PG21	HIGH CONSTRUCTION	PG21	PG21
T1230240232-000	H24B-TSH-2M32		M32	M32
T1230243216-000	H24B-TSH-M32/M16		M32	M16
PART NUMBER	DESCRIPTION	TYPE	IG1	IG2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 01JUN2015 David Wang	STE TE Connectivity	
DIMENSIONS: mm		CHK 01JUN2015 Chris Wang		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 01JUN2015 Xiang Xu	NAME H24B-TSH-2M/PG	
0 PLC ±-		PRODUCT SPEC 108-137013	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
1 PLC ±-		APPLICATION SPEC 114-137013	A300779 © T12302402XX000	
2 PLC ±-		WEIGHT	SCALE 1:1 SHEET 1 OF 1 REV A	
3 PLC ±-				
4 PLC ±-				
ANGLES ±-				
MATERIAL				
FINISH				
		Customer Drawing		