

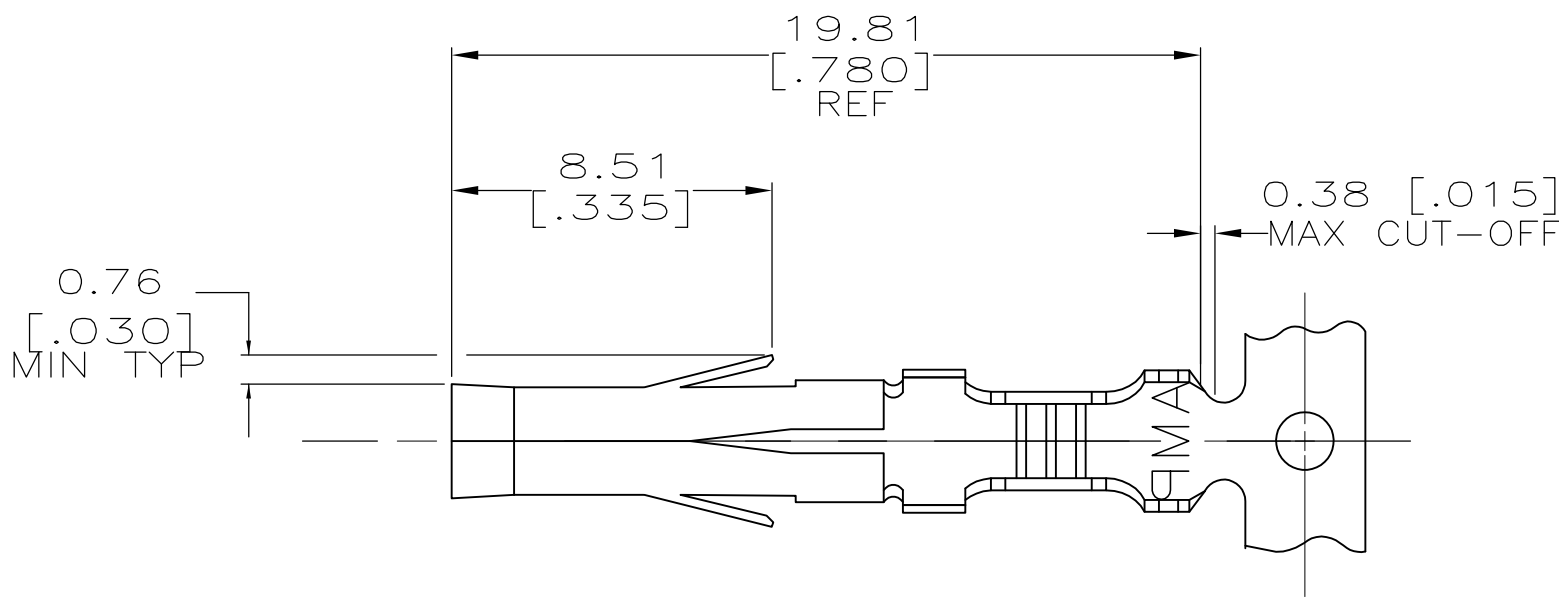
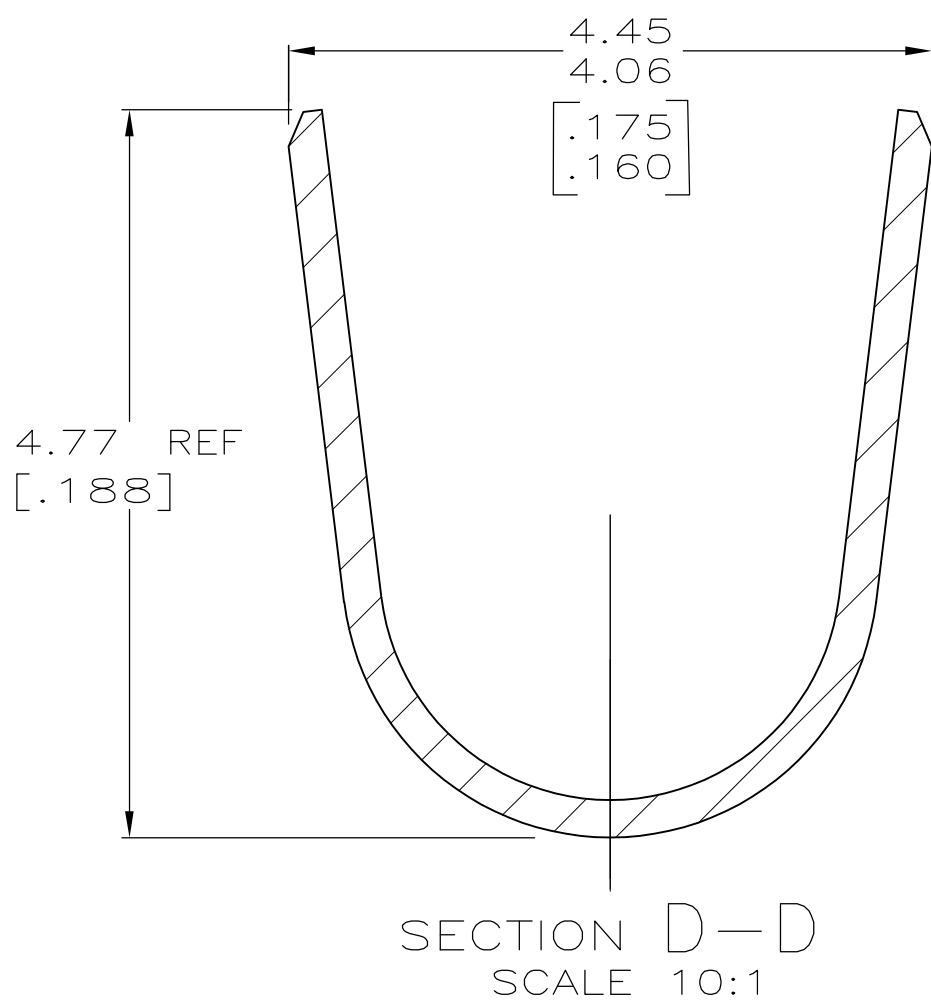
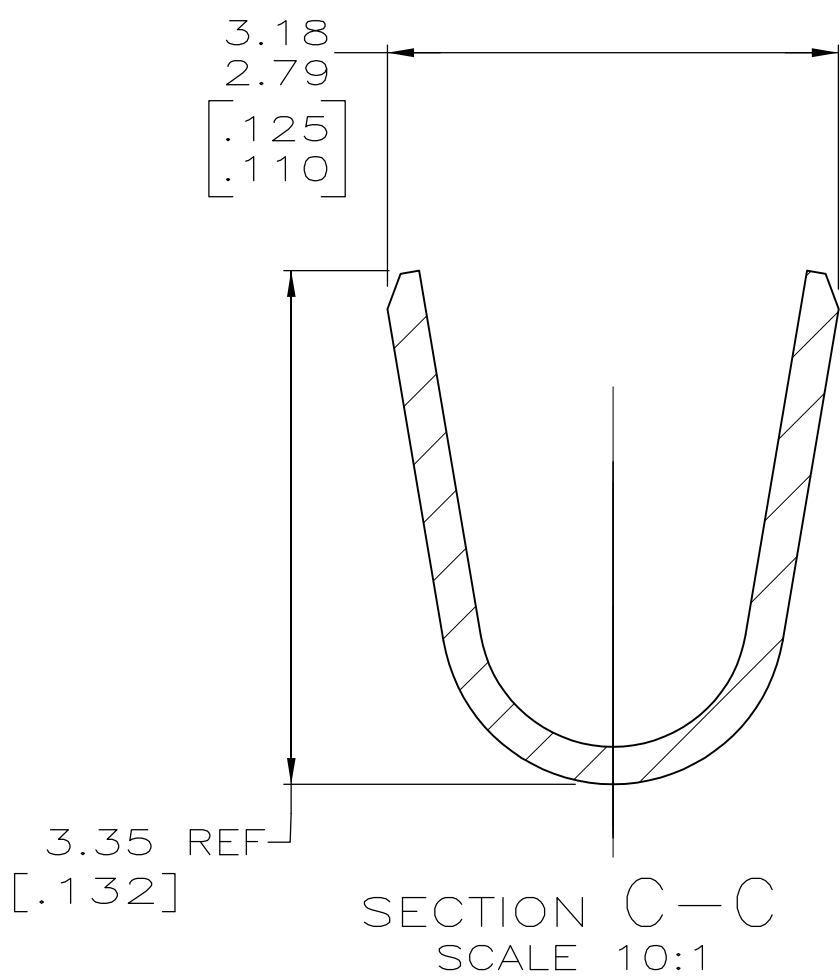
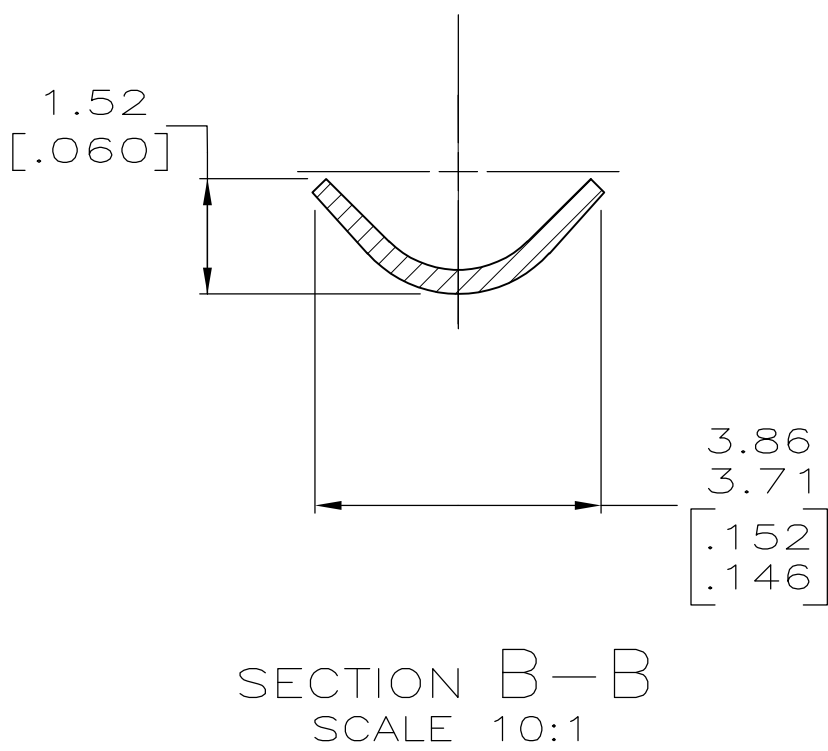
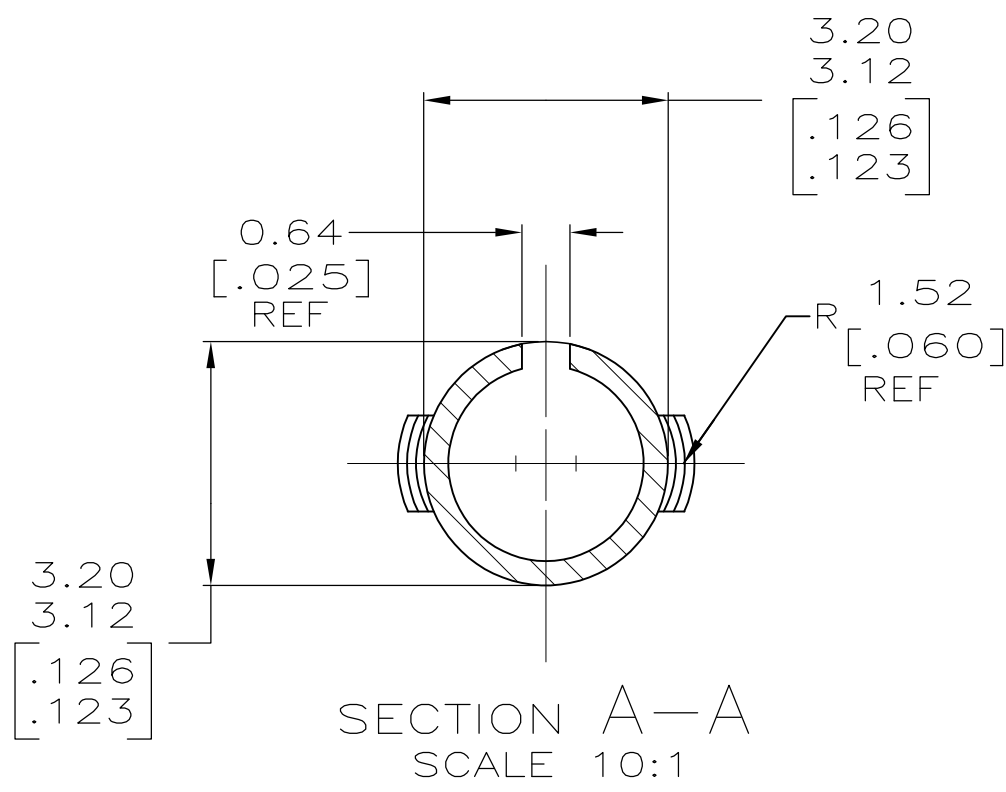


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	0		AL1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

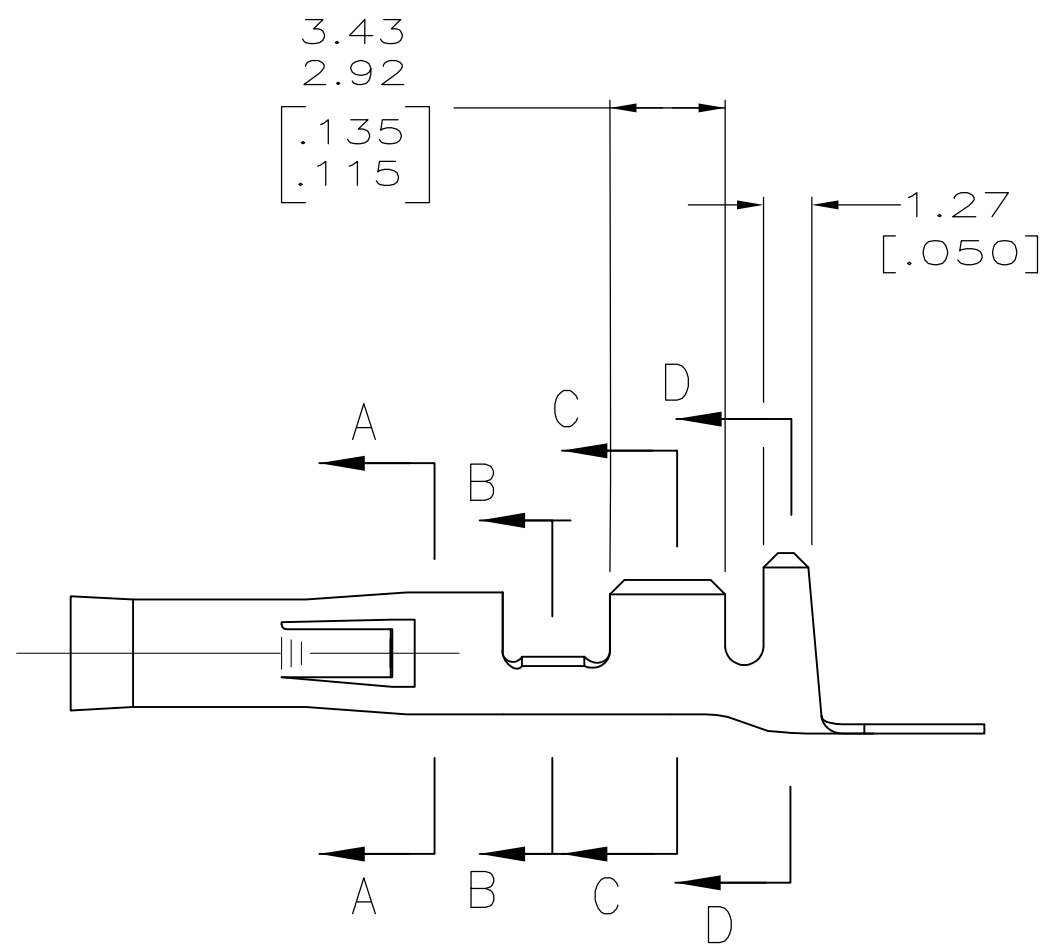


- WIRE RANGE: 0.5–2mm² (20–14 AWG).
- INSULATION RANGE: 3.56 [.140] MAX. DIA.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 0.00076 [.000030] MIN GOLD STRIPE OVER 0.00127 [.000050] MIN NICKEL ON INSIDE OF SOCKET.

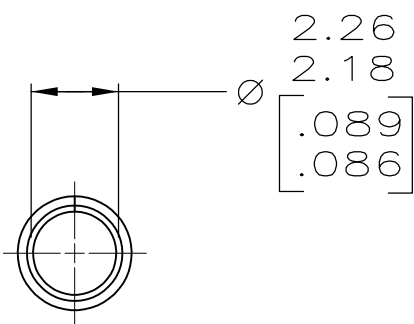

METRIC

PRE-TIN	0.25 [.010] PHOS BRZ	350415-6
	0.25 [.010] BRASS	350415-5
PRE-TIN	0.25 [.010] BRASS	350415-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 22NOV2005	 TE Connectivity			
		CHK D. COLEY 22NOV2005				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD D. COLEY 22NOV2005	NAME .093 SOCKET			
		PRODUCT SPEC	COMMERICAL PIN AND SOCKET			
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.13 [.005] 4 PLC ± - ± 0°30' ANGLES ± - ± 0°30'	APPLICATION SPEC	SIZE A1			
		WEIGHT	CAGE CODE 00779			
MATERIAL SEE TABLE		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV AL