

5

4

3

2



1

D


C

B

A

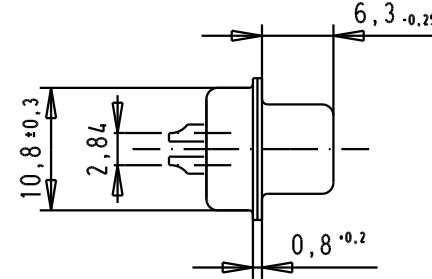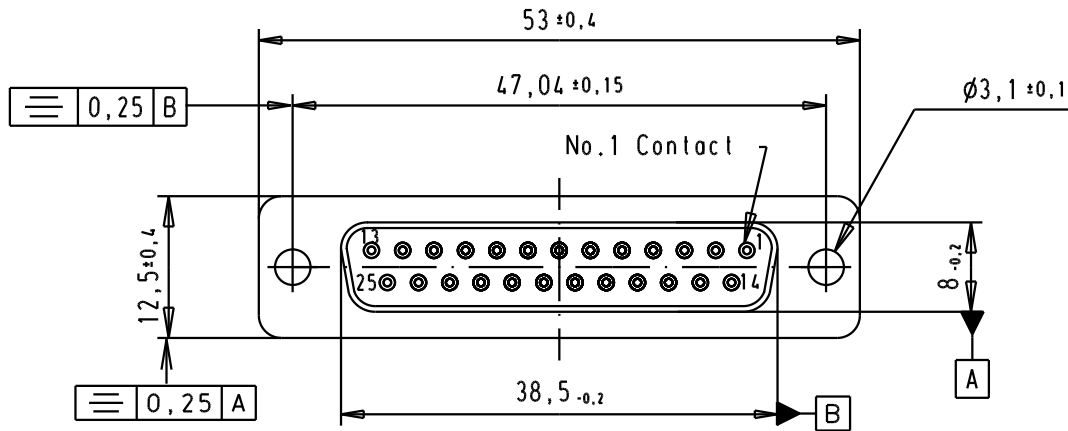

Solder buckets for AWG 20 Max

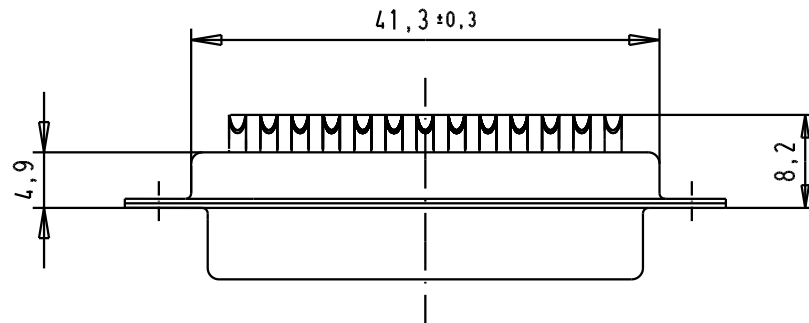

SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pf $\pm$ 20%
Working Voltage	100v
Current Rating	7.5A
Insulation Resistance	>1G Ω

FREQUENCY (MHz)	ATTENUATION (dB)
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

				Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, female, straight, 25 Poles, solder buckets, tin plated shell with holes	Maßstab/ Scale 1.5:1
			Detail.	8-JUL-02	CV			
			Insp.					
			Stand.					
33271	28/11/05	JMDR					TB 09643117220	Blatt/ Page 1 / 1
31058	8-JUL-02	CV						
Mod.	Dat.	Name						

HARTING EURL
F-95972 Paris

Sub.