


# Captive Screw Type 4 6-32 Thread

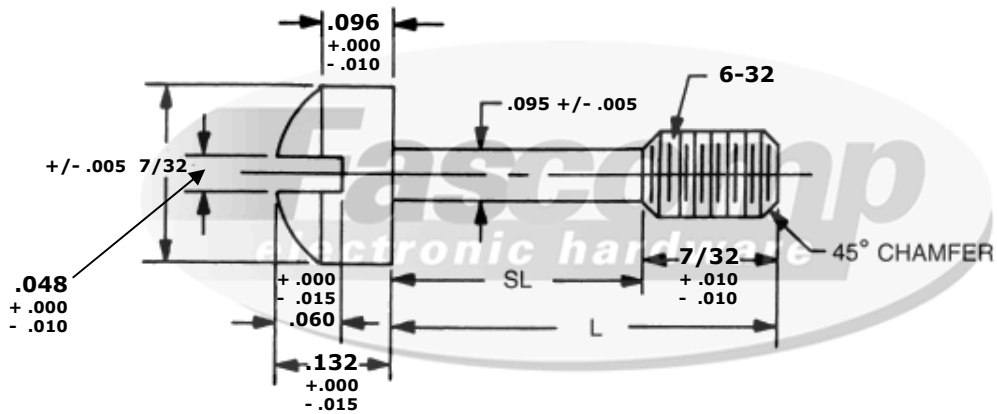

**Create a part number:**

| Length | Material | Finish |
|--------|----------|--------|
| FCXXXX | XX       | XX     |
|        |          |        |

| Captive Screws - 6-32 Thread |        |            |               |
|------------------------------|--------|------------|---------------|
|                              | FCXXXX | Length (L) | S.L. +/- .010 |
| ✓                            | FC0830 | 5/16       | 3/32          |
|                              | FC0831 | 3/8        | 5/32          |
|                              | FC0832 | 7/16       | 7/32          |
|                              | FC0833 | 1/2        | 9/32          |
|                              | FC0834 | 9/16       | 11/32         |
|                              | FC0835 | 5/8        | 13/32         |
|                              | FC0836 | 11/16      | 15/32         |
|                              | FC0837 | 3/4        | 17/32         |
|                              | FC0838 | 13/16      | 19/32         |
|                              | FC0839 | 7/8        | 21/32         |
|                              | FC0840 | 15/16      | 23/32         |
|                              | FC0841 | 1          | 25/32         |

| Material |                    |                 |
|----------|--------------------|-----------------|
|          | Material Code (XX) |                 |
| ✓        | B                  | Brass           |
|          | S                  | Steel           |
|          | SS                 | Stainless Steel |

|   | Compatible Finish (XX) |                                       |
|---|------------------------|---------------------------------------|
| ✓ | B, S, SS               | 0 - Plain                             |
|   | B, S                   | 5 - Nickel Plate (QQ-N-290)           |
|   | B, S                   | 12 - Zinc Clear (ASTM-B-633)          |
|   | B, S                   | 16 - Electro Tin (MIL-T-10727 TYPE 1) |
|   | SS                     | 20 - Passivation (MIL-F-14072D)       |
|   | B, S, SS               | 26 - Black Oxide                      |
|   | B, S                   | 28 - Zinc Yellow (ASTM-B-633)         |

**Tolerances**  
**Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware



**Fascomp Electronic Hardware**  
 7814 Kingspointe Pkwy  
 Orlando, FL 32819  
 www.fascomp.com  
 Tel: (407) 226-2112  
 Fax: (407) 226-3370

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.