
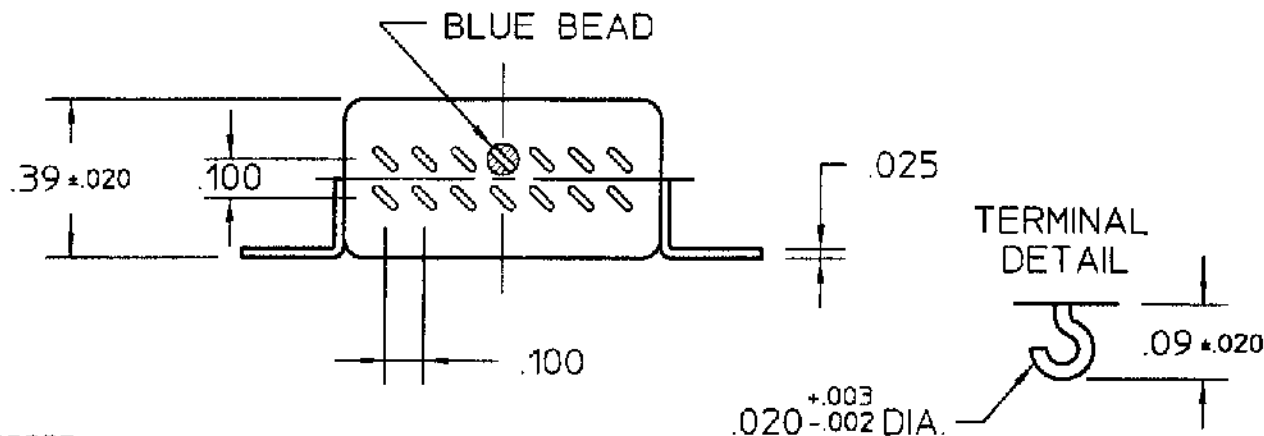


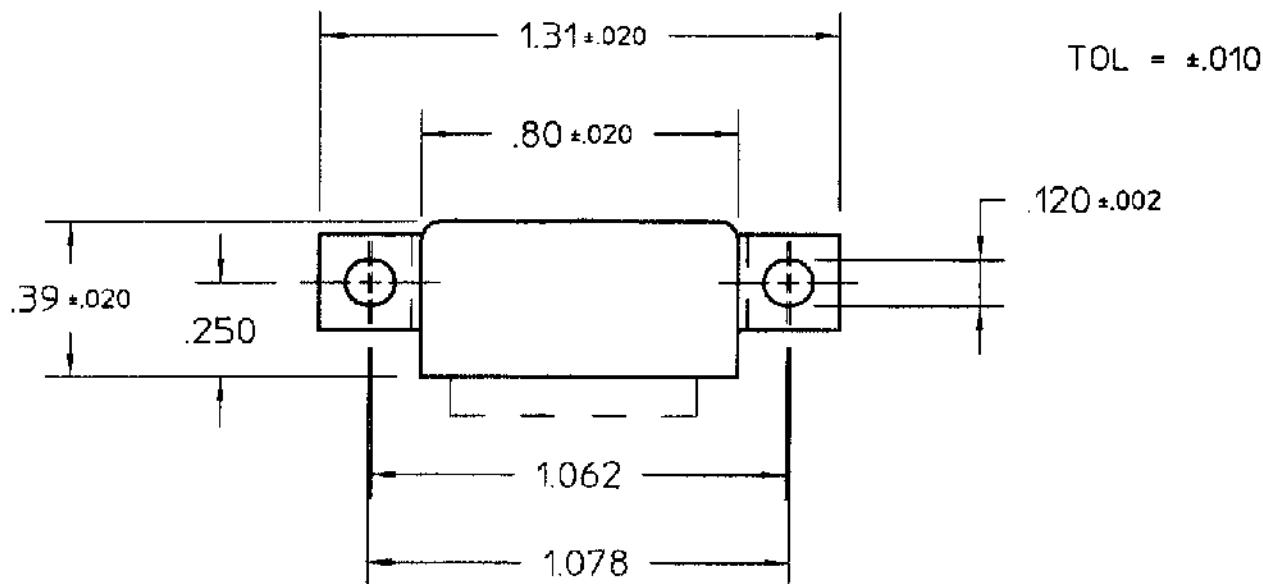

REV. 1

DCO 63333


COIL: @ 25°C
 RESISTANCE _____ 390 OHMS ±10%
 NOMINAL VOLTAGE _____ 26.5 VDC
 MUST OPERATE _____ 13.0 VDC
 MUST RELEASE _____ 10.1 VDC MAX, 1.84 VDC MIN.

ENVIRONMENT:

VIBRATION _____ 10 _____ CPS TO _____ 2000 _____ CPS @ _____ 15 _____ g's
 SHOCK _____ 100 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C

NOTES: _____ OPERATE & RELEASE 7 MS MAX.
 (INCLUDING BOUNCE)

CUSTOMER DATA SHEET

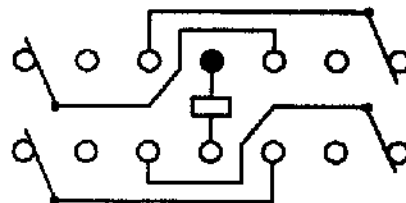

TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO
 _____ 2 AMP 28 VDC RESISTIVE
 _____ 100,000 OPERATIONS

DR. R.B. 4/15/98

CK. 766 10-24-00

CII Technologies
 advanced control electronic solutions

CUST. _____ QPL
 CUST. NO. _____ M39016/40-002 REV. _____

"SR" RELAY

SR-7602