



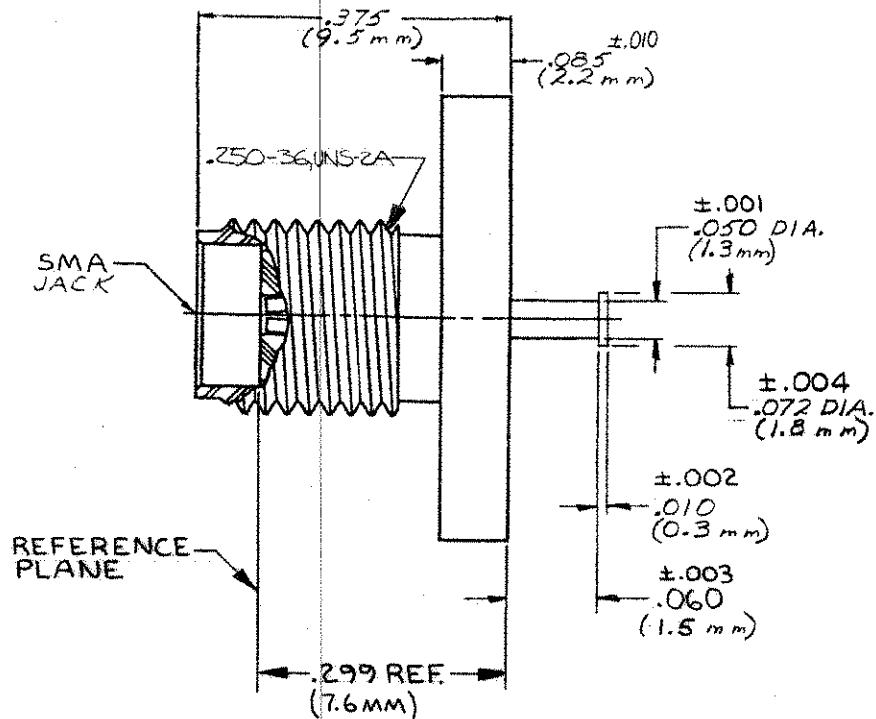

.086-56 UNC-2B
8 PLACES @ 45° APART

REV.	DESCRIPTIONS	DATE	APP.
010	RELEASED	3/15/84	R. Gurus

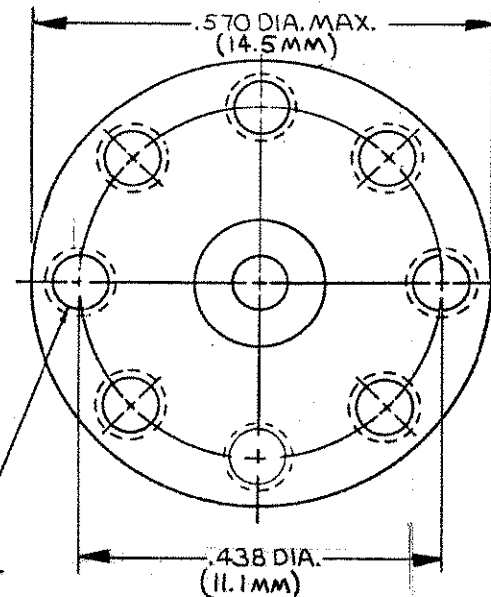

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER QQ-P-35
DIELECTRIC	TFE FLUOROCARBON PER MIL-P-19468 AND FED SPEC L-P-403	N/A
CENTER CONTACT	BERYLLIUM COPPER PER QQ-C-530, ALLOY 173	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
COMPONENT	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ± .008 ± 1° THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF OMNI SPECTRA INCORPORATED AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION	DRAWN <i>D. Bando</i> DATE <i>3-15-84</i>	 MICROWAVE CONNECTOR DIVISION
	CHECKED <i>R. Gurus</i> <i>3/15/84</i>	
	APP'D. <i>R. Gurus</i> <i>3/15/84</i>	
	USE ASS'Y PROCEDURE	
TITLE SMA STRIP TRANSMISSION LINE SURFACE LAUNCH JACK STRIPLINE TURRET TERMINAL (MB3517/6-3100)		
SIZE <i>B</i> CODE IDENT NO. <i>26805</i> <i>2066-8001-92</i>		REV <i>010</i>
SCALE <i>1X</i>		SHEET 1 OF 1

CUSTOMER

1053423
SHEET 1 OF 1
REV 0