


Model 72925

Do-It-Yourself 2mm Stackable Safety Sheathed Plug

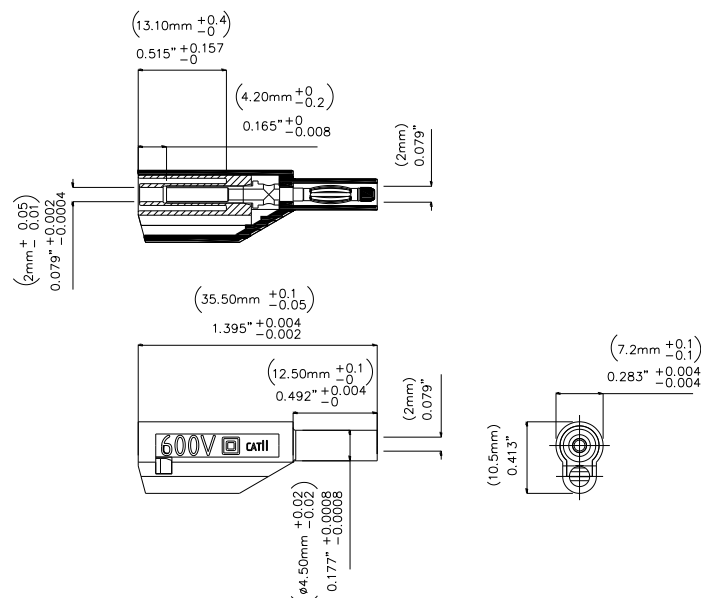

Features

- Build your own 2mm stackable test leads
- Plug spring is Beryllium Copper for long insertion life
- Safety rating CAT II 600V *when plug is correctly assembled and terminated.*

Materials

Plastic body:	Polypropylene
Plug body:	Brass, Nickel Plated
Spring:	Beryllium Copper, Nickel Plated
Spring Tip:	Polysulfone

Specifications

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 mΩ

Ordering Information

Model **72925**-Color
 Colors: **-0** (black) and **-2** (red)

USA: Sales: 800-490-2361
 Technical Support: technicalsupport@pomonatest.com
 Fax: 425-446-5844
Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = $\pm 0.02''$ (.51 mm), .xxx = $\pm 0.005''$ (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.