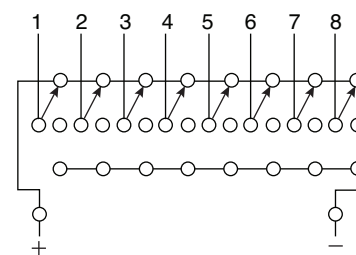
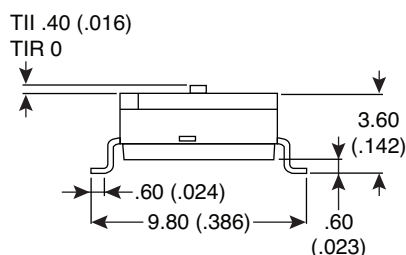

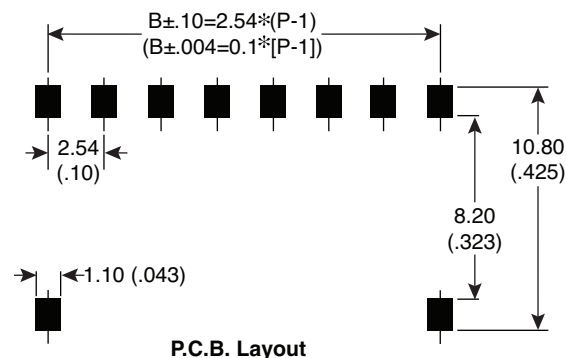
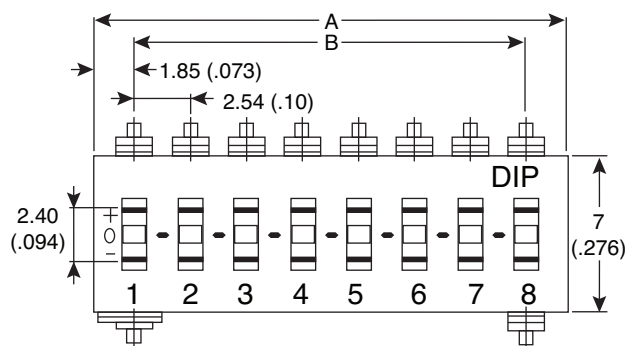



## Dimensions: mm (in.)

**Electrical Specifications:**

- Rating: Non-switching: 100mA/50V DC  
Switching: 25mA/24V DC
- Contact resistance: 100mΩ max. (initial)
- Insulation resistance: 100MΩ min.

**Note:**

- RoHS Compliant

**Mechanical Specifications:**

- Operating temperature: -20°C ~ +85°C
- Operation force: 1000gf max.

| Mouser Stock No. | No. of Pos. | Dim A.<br>mm (in.) | Dim B.<br>mm (in.) | Actuator |
|------------------|-------------|--------------------|--------------------|----------|
| 106-TIM4-EV      | 4           | 11.32 (.446)       | 7.62 (.30)         | Raised   |
| 106-TIM10-EV     | 10          | 26.56 (1.05)       | 22.86 (.90)        | Raised   |
| 106-TMR8T-EV     | 8           | 21.48 (.846)       | 17.78 (.70)        | Recessed |
| 106-TMR9T-EV     | 9           | 24.02 (.946)       | 20.32 (.80)        | Recessed |

**Dip Switches (SMT)**

106-TIM4-EV, 106-TIM10-EV, 106-TMR8T-EV, 106-TMR9T-EV