608 Series
8 mm Panel Mount Indicators

Certifications & Ratings

- RoHS compliant

Application

The 608 Series LED Panel Mount Indicators are designed for a variety of applications such as.

- Main power indication
- Remote power indication
- Status indication
- Maintenance and warning indication
- Instrumentation

. . . and many more!

Dimensions

inches [mm]

Figure 1

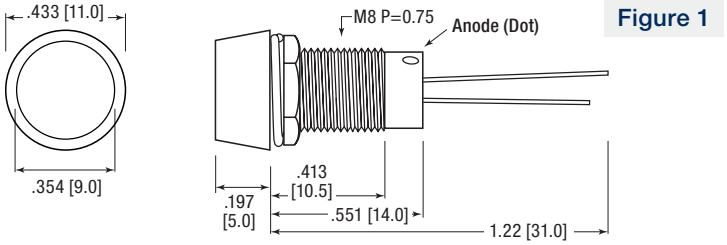

Figure 2

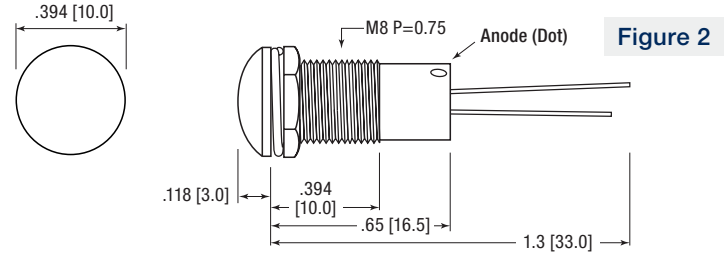

Figure 3

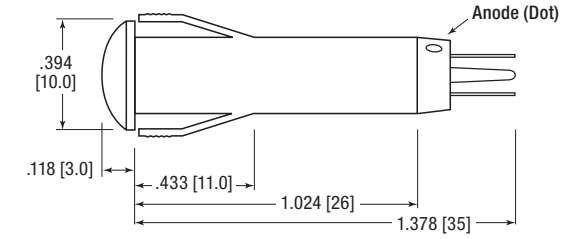

Fig 3 & 4 Mounting Hole



Figure 4

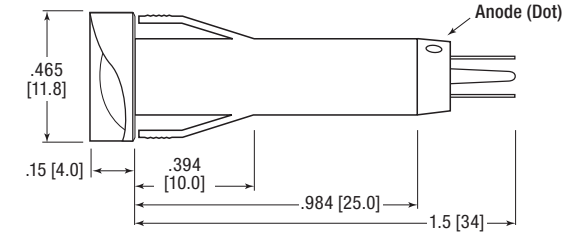

Mechanical Information

Mounting Hole Size:	0.323" (8.2 mm) (Fig. 1 & 2), Snap-Fit see Fig. 3 & 4
Max Panel Thickness:	See part numbers
Mounting Torque:	0.217 lbs/ft or 3 kg/cm (Fig. 1 & 2 only)

Specifications

Voltage Options:	2 VDC (resistor required) 6, 12 & 24 VDC (no resistor required)
Operating Temp:	-25 °C to +85 °C (-13 °F to +185 °F)
Storage Temp:	-25 °C to +85 °C (-13 °F to +185 °F)
Electrical Connection:	Leads (Fig. 1 & 2), Solder terminals (Fig. 3 & 4)
Housing:	Polycarbonate
Terminals:	Copper — Nickel Plated
Lock Washer:	Iron — Nickel Plated
Nut:	Brass — Nickel Plated

Dialight

Ordering Information 608 Series

Part Number	Color	Voltage (V DC)	Current (mA)	Typical Intensity (mcd)	Figure	Panel Thickness
Lock Washer & Nut						
608-1131-110F	Red	2	15	20	1	0.236" (6 mm)
608-1231-110F	Green			15		
608-1331-110F	Yellow			4		
608-3131-110F	Red			20	2	
608-3231-110F	Green			15		
608-3331-110F	Yellow			4		
Snap-Fit						
608-1132-220F	Red	6	15	60	3	0.197" (5 mm)
608-1232-220F	Green			110		
608-1332-220F	Yellow			90		
608-1132-230F	Red	12		60		
608-1232-230F	Green			110		
608-1332-230F	Yellow			90		
608-1132-240F	Red	24		60		
608-1232-240F	Green			110		
608-1332-240F	Yellow			90		
608-2132-220F	Red	6		60	4	
608-2232-220F	Green			110		
608-2332-220F	Yellow			90		
608-2132-230F	Red	12		60		
608-2232-230F	Green			110		
608-2332-230F	Yellow			90		
608-2132-240F	Red	24		60		
608-2232-240F	Green			110		
608-2332-240F	Yellow			90		

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialightsignalsandcomponents.com

Warranty Statement: Except for the warranty expressly provided for [herein/above/below], Dialight disclaims any and all other warranties, express or implied, including, without limitation, any warranties of merchantability, fitness for a particular purpose, title, and noninfringement.