


# SPECIFICATIONS

1. CASE:  
22 GA. (.030) CRS, TIN PLATED
2. RATED CURRENT:  
20A
3. RATED VOLTAGE:  
250VAC, 50/60Hz
4. TEST VOLTAGE:  
LINE TO LINE: 1.7KVDC  
LINE TO GROUND: 2.2KVDC
5. LEAKAGE CURRENT:  
2.4mA @ 250VAC, 50Hz


REVISION			
LTR	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07-30-02	LE
B	ADD TERMINALS LOCATION	02-10-11	LE

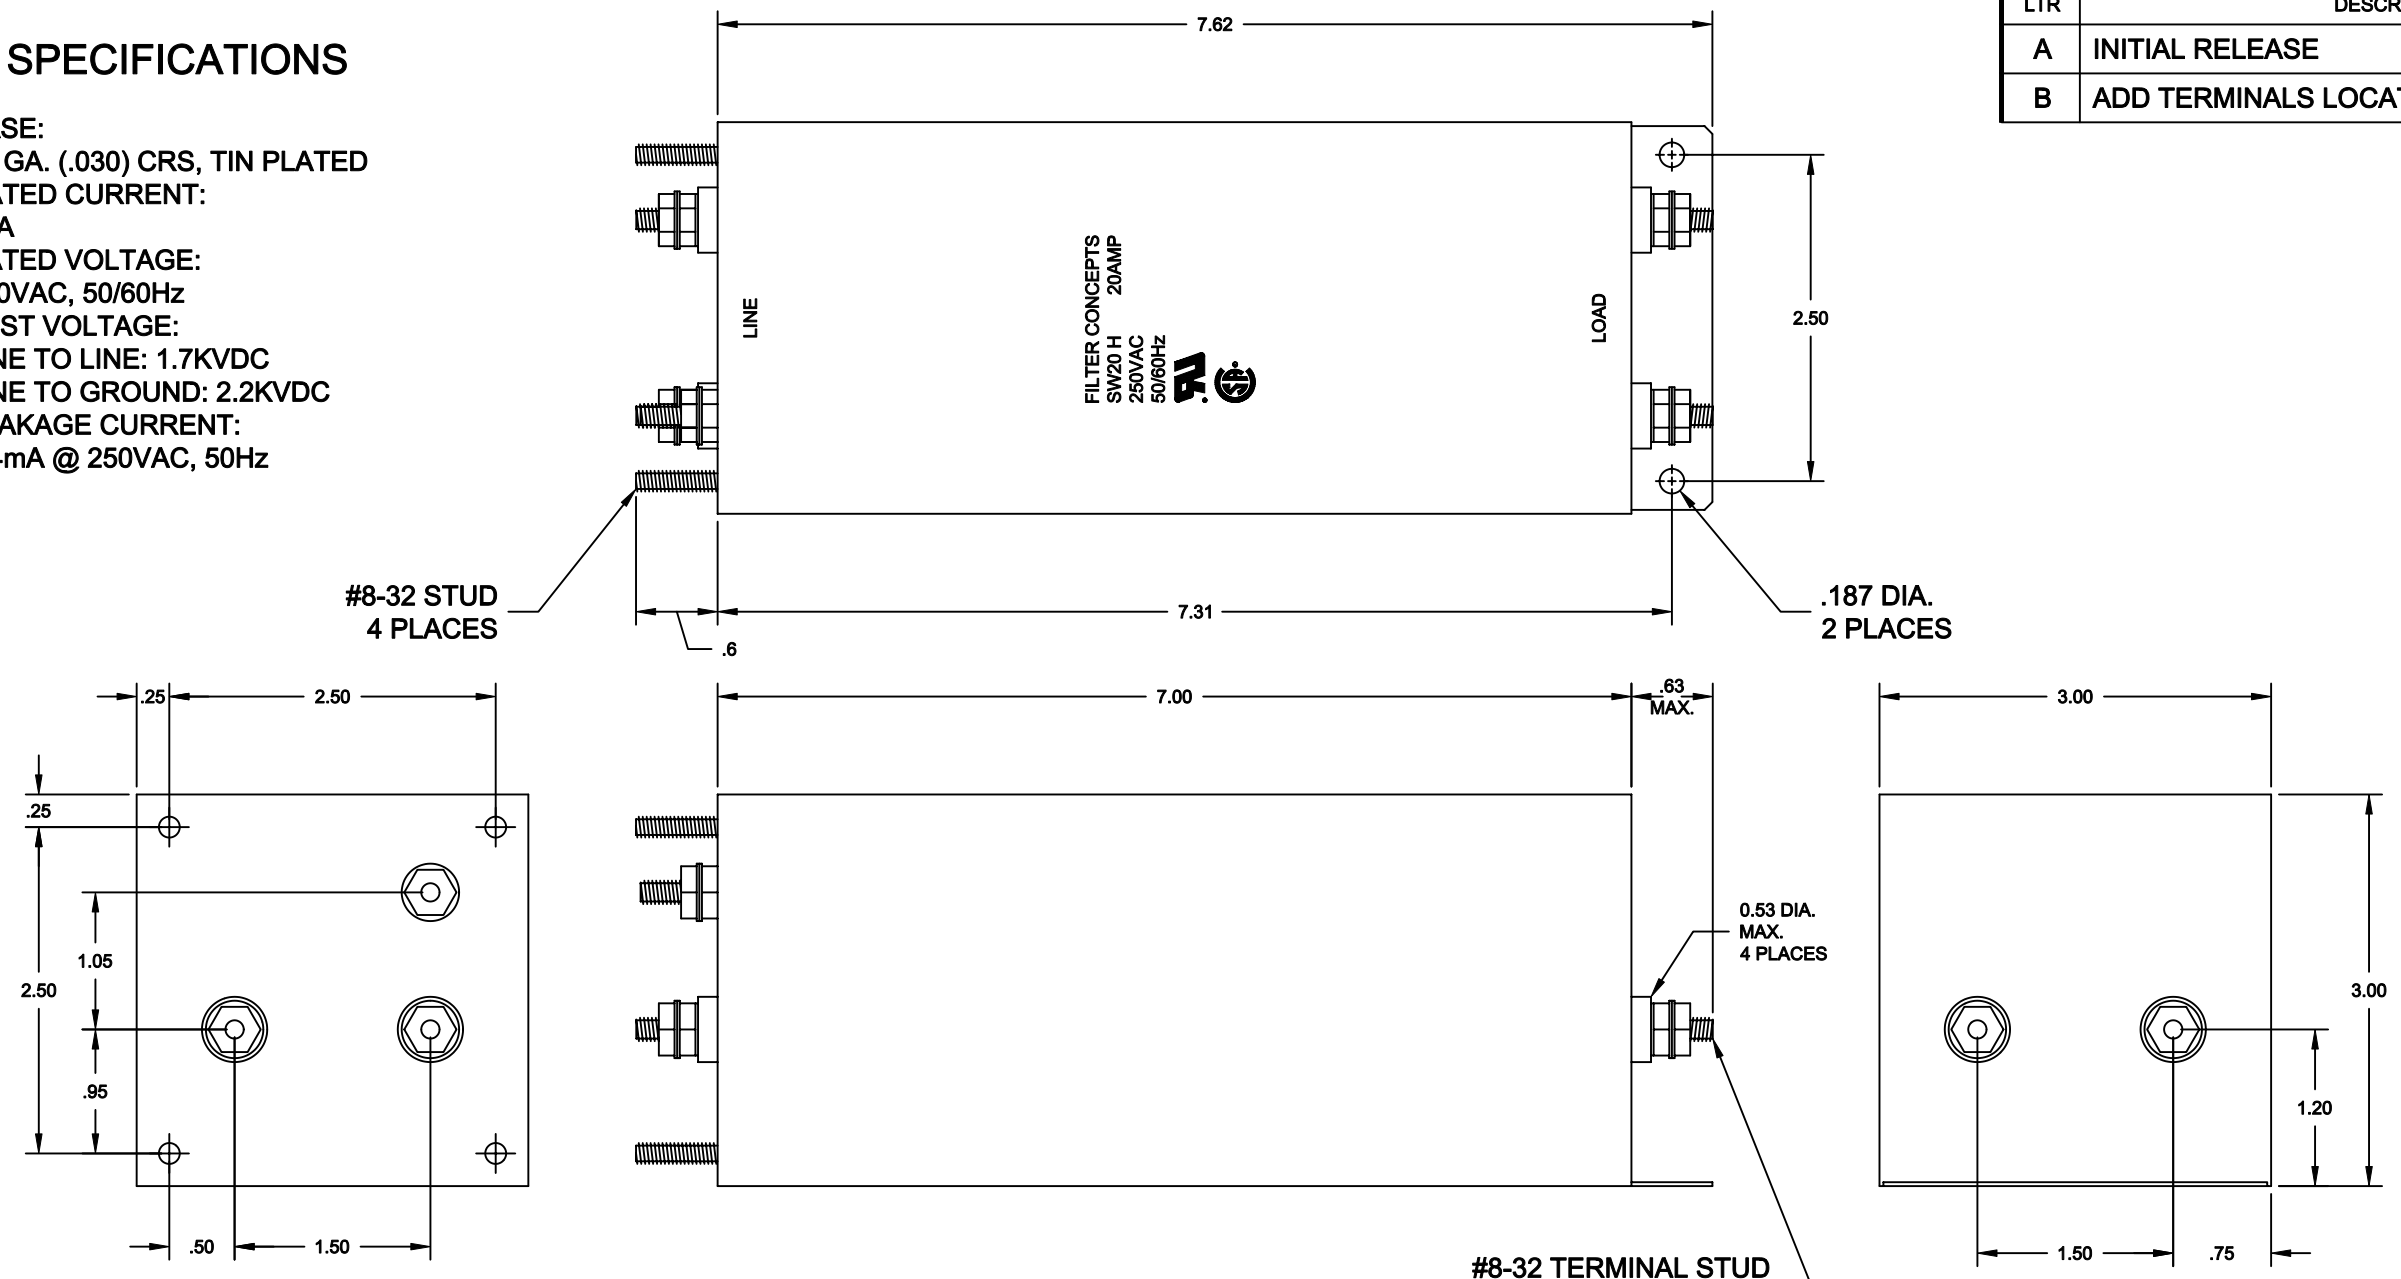

INSERTION LOSS (50Ω TYPICAL)

	.05 MHz	.50 MHz	1.5 MHz	5 MHz	50 MHz	.1 GHz
L/L	55 db	65 db	65 db	65 db	65 db	50 db
L/G	35 db	65 db	65 db	65 db	55 db	50 db

## SCHEMATIC

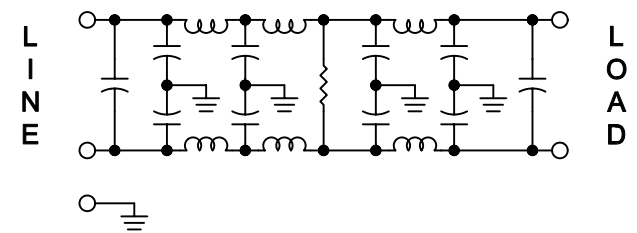

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ±.030 ± .XXX ±.010	CONTRACT NO.	
	APPROVALS	DATE
MATERIAL	DRAWN	GIANG TRINH 07-30-02
	CHECKED	DANNIEL VUONG 07-30-02
FINISH		

**FILTER CONCEPTS INC.**

**APPLICATION DRAWING**  
**SW20 H FILTER**

SIZE	CODE IDENT NO.	DRAWING NO.
<b>B</b>		<b>7475</b>
SCALE	2/3	SHEET 1 OF 1