

## Relay base - SIM-AMS 2-R - 2271044

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Plug-in base for standard I/O modules, with safety catch for securing solid-state relays, with different numbers of contacts, can be labeled with marker pins BN or BNB

The figure shows version SIM-AMS  
1



### Key Commercial Data

Packing unit	10 pc
GTIN	 4 017918 054083
GTIN	4017918054083

### Technical data

#### Dimensions

Pin dimensions	1,1 x 0,5 mm
Hole diameter	1.4 mm

#### General

Nominal voltage $U_N$	250 V AC
Nominal current $I_N$	5 A
Number of contacts, type	2
Color	green
Insulating material	PA
Standards/regulations	DIN VDE 0110b, Gr. C for 250 V DC

#### Standards and Regulations

Connection in acc. with standard	UL
Standards/regulations	DIN VDE 0110b, Gr. C for 250 V DC

#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50

# Relay base - SIM-AMS 2-R - 2271044


## Technical data

### Environmental Product Compliance

	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"
--	-----------------------------------------------------------------------------------------------------

## Drawings

Dimensional drawing

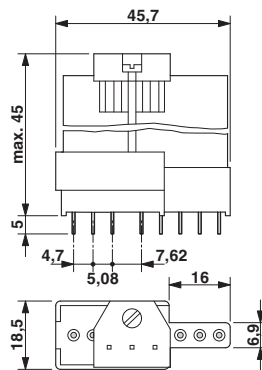

## Approvals

### Approvals

Approvals

UL Recognized / EAC

Ex Approvals

### Approval details

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYVV/template/LISEXT/1FRAME/index.htm</a>	FILE E 113228
Nominal voltage UN	300 V		
Nominal current IN	5 A		

EAC		RU C- DE.A*30.B.01082
-----	--	--------------------------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>