
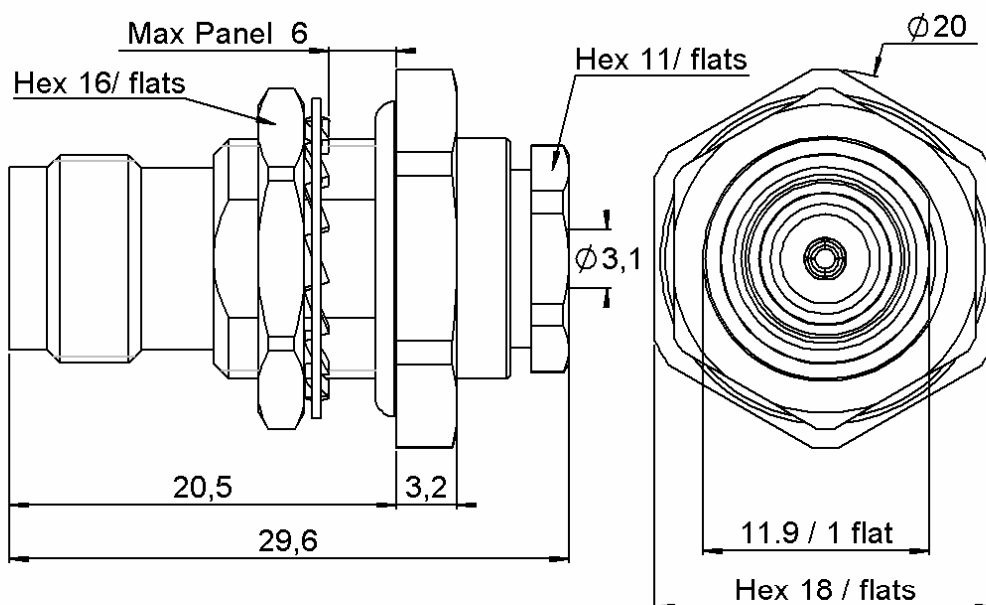


STRAIGHT BULKHEAD JACK PANNEL SEAL
REAR MOUNT CLAMP TYPE - CABLE 2.6/50
R143.324.000


Series : TNC


PANEL CUT OUT


mm		
	Maxi	mini
A	12.8	12.7
B	12.1	12



SCALE:1/1

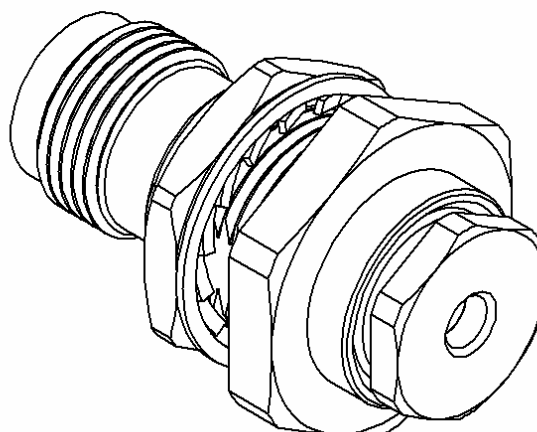

All dimensions are in mm.

COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	NICKEL 2
CENTER CONTACT	BERYLLIUM COPPER	GOLD 0.5 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	PTFE	-
GASKET	SILICONE RUBBER	-
OTHERS PARTS	BRASS	NICKEL 2
-	-	-
-	-	-

Issue : 1105 V

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT BULKHEAD JACK PANNEL SEAL**REAR MOUNT CLAMP TYPE - CABLE 2.6/50****R143.324.000**

Series : TNC

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-11	GHz
VSWR	1.30* + 0,0000	x F(GHz) Maxi
Insertion loss	0.06	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (57	- F(GHz)) dB Maxi
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	27 N mini
Axial force – Opposite end	27 N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	370 N.cm
Clamp nut	450 N.cm
A/F clamp nut	11,0000 mm

Mating life	500 Cycles mini
Weight	23,2000 g

ENVIRONMENTAL

Operating temperature	-65/+165 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATION**CABLE ASSEMBLY**

Stripping	a	b	c	d	e	f
mm	4,00	2,00	9,00	0,00	5,00	0,00

Assembly instruction :

Clamp 01

Recommended cable(s)

RG 188

RG 187

KX 22A

RG 316

RG 174

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	110 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.

OTHER CHARACTERISTICS

*1.40 -> 4 GHz

1.80 -> 4 to 11 GHz

Issue : 1105 V

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

