


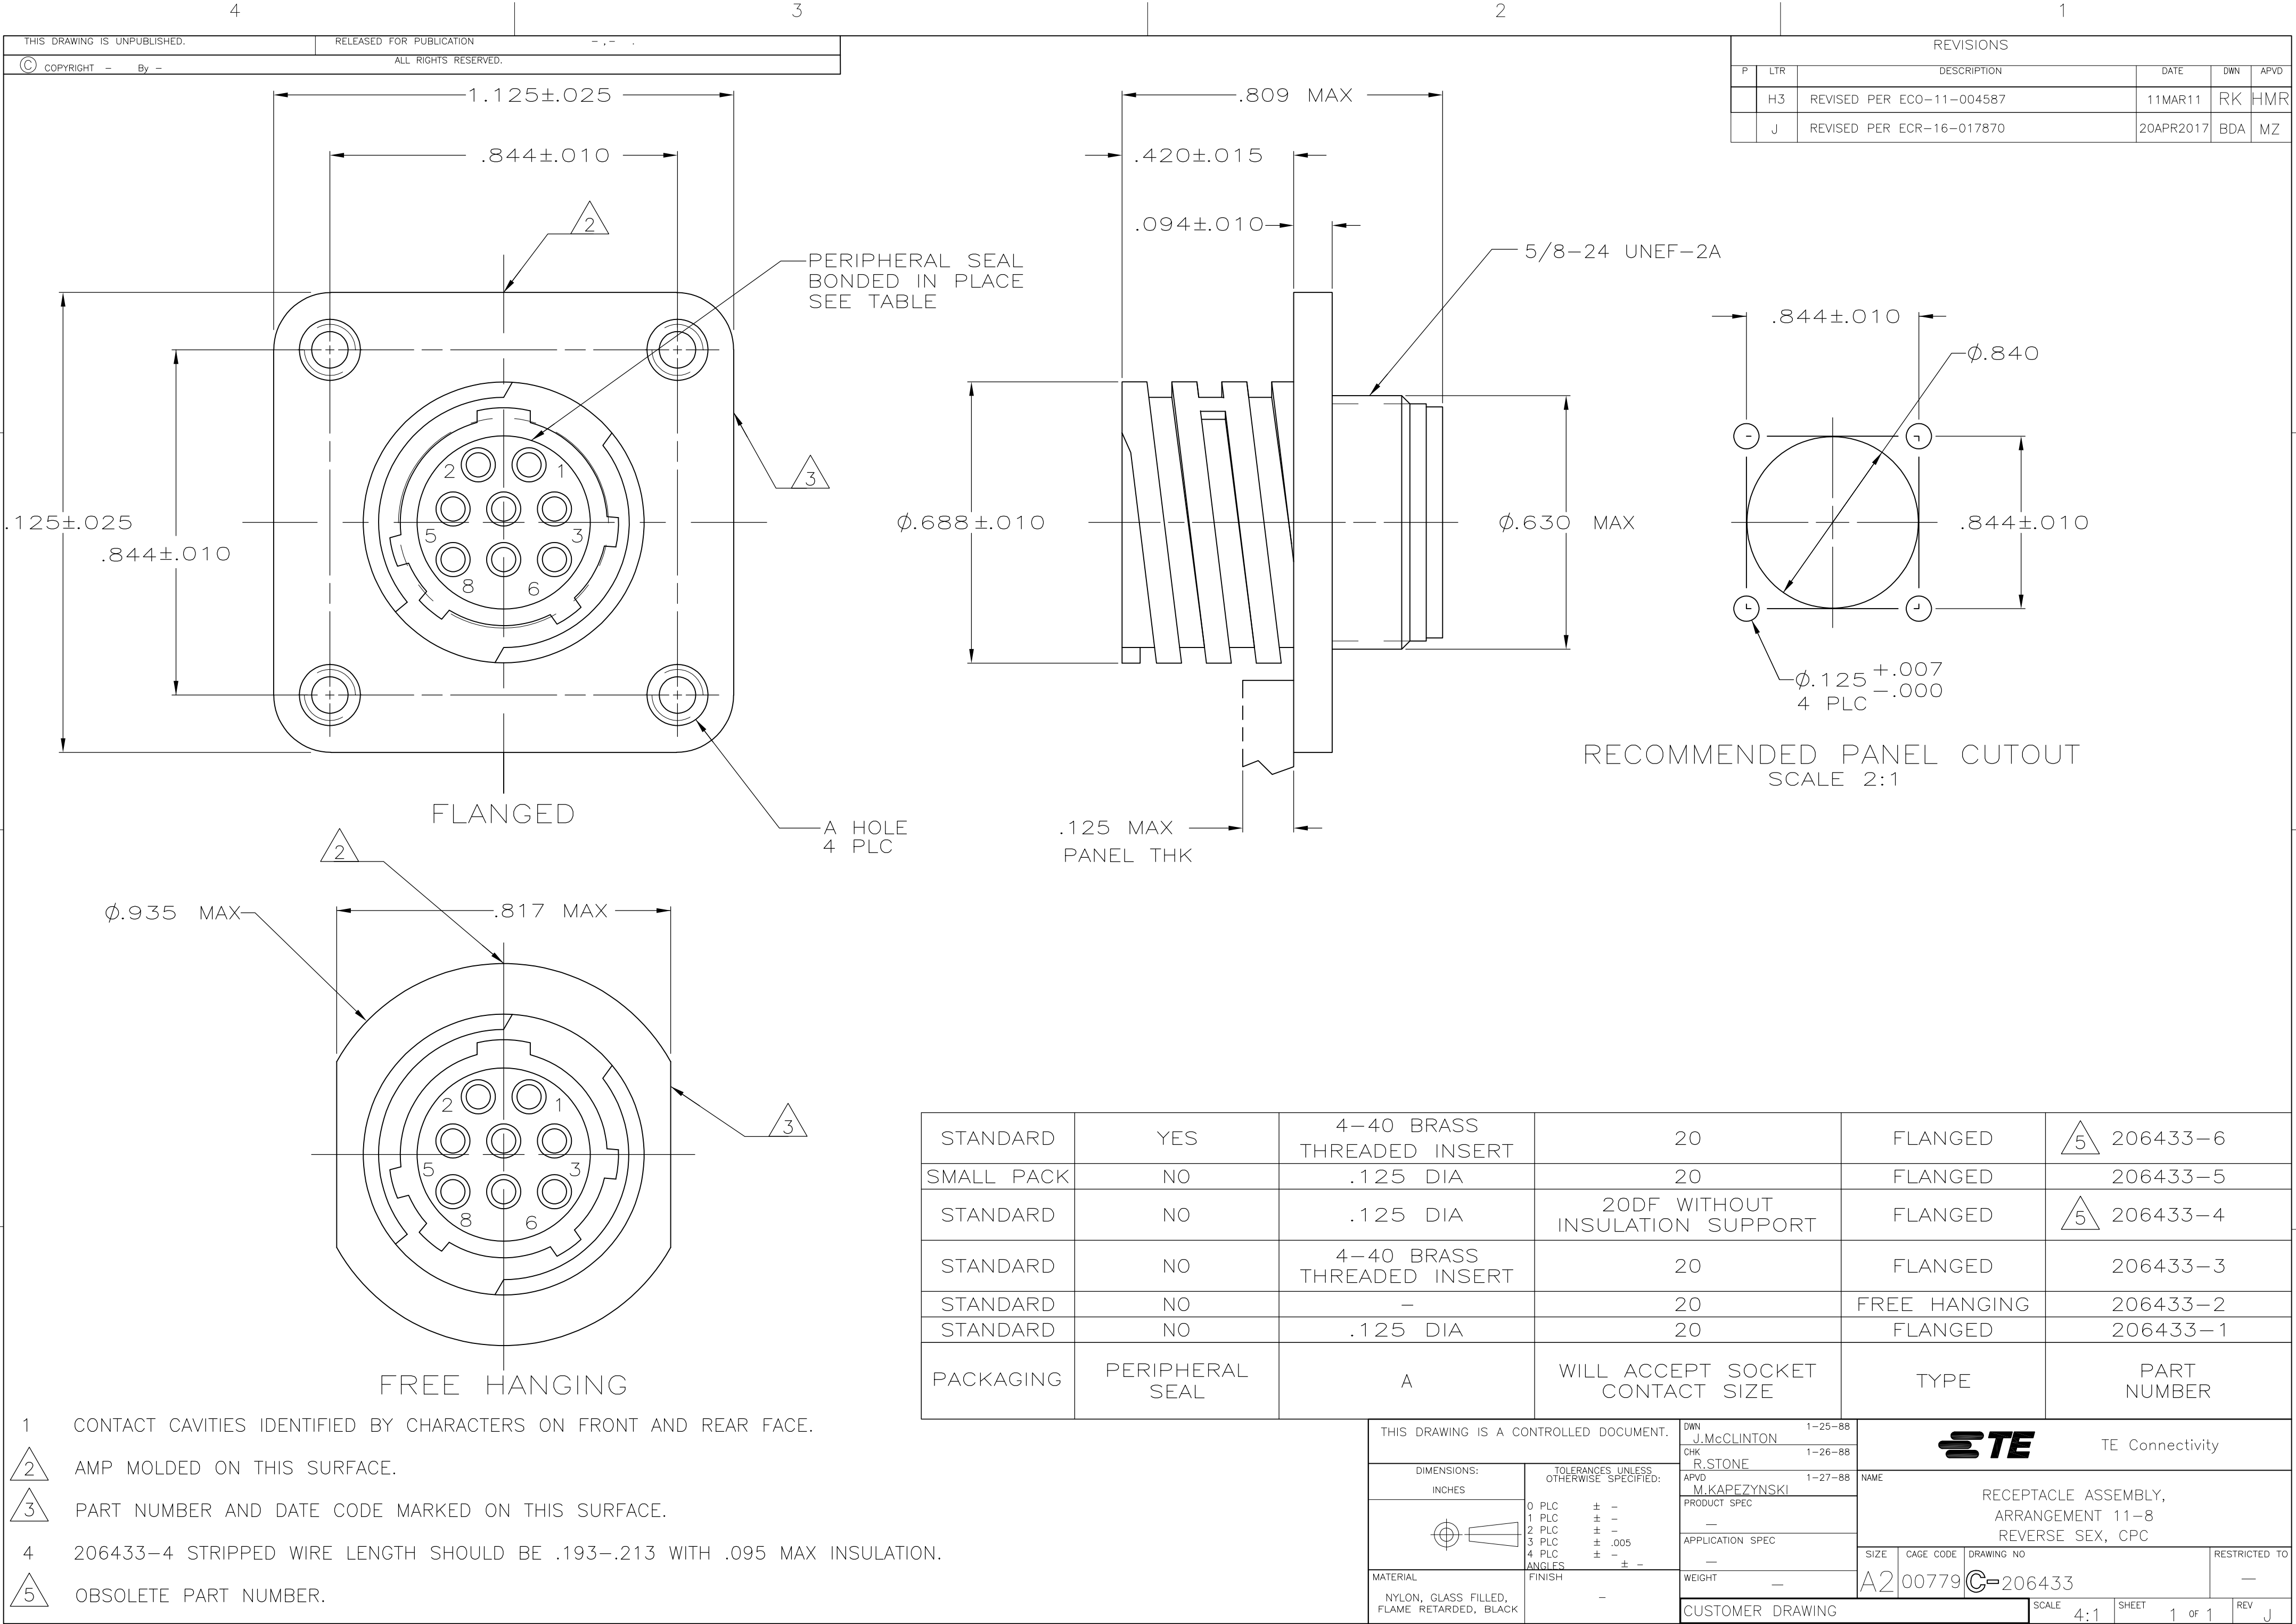

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H3	REVISED PER ECO-11-004587	11MAR11	RK	HMR
	J	REVISED PER ECR-16-017870	20APR2017	BDA	MZ

STANDARD	YES	4-40 BRASS THREADED INSERT	20	FLANGED	206433-6
SMALL PACK	NO	.125 DIA	20	FLANGED	206433-5
STANDARD	NO	.125 DIA	20DF WITHOUT INSULATION SUPPORT	FLANGED	206433-4
STANDARD	NO	4-40 BRASS THREADED INSERT	20	FLANGED	206433-3
STANDARD	NO	-	20	FREE HANGING	206433-2
STANDARD	NO	.125 DIA	20	FLANGED	206433-1
PACKAGING	PERIPHERAL SEAL	A	WILL ACCEPT SOCKET CONTACT SIZE	TYPE	PART NUMBER

- 1 CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACE.
- 2 AMP MOLDED ON THIS SURFACE.
- 3 PART NUMBER AND DATE CODE MARKED ON THIS SURFACE.
- 4 206433-4 STRIPPED WIRE LENGTH SHOULD BE .193-.213 WITH .095 MAX INSULATION.
- 5 OBSOLETE PART NUMBER.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .005
4 PLC ± -
ANGLES ± -
FINISH -

MATERIAL
NYLON, GLASS FILLED,
FLAME RETARDED, BLACK

FINISH -

DWN J.McCLINTON 1-25-88
CHK R.STONE 1-26-88
APVD M.KAPEZYNSKI 1-27-88
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

NAME

RECEPTACLE ASSEMBLY,
ARRANGEMENT 11-8
REVERSE SEX, CPC

SIZE A2
CAGE CODE 00779
DRAWING NO C-206433
SCALE 4:1
SHEET 1 OF 1
REV J

TE Connectivity

RESTRICTED TO -