


PERFORMANCE CHARACTERISTICS

- CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE 500V AC (CONT / CONT)
- OPERATING TEMPERATURE -55°C TO 125°C
- CONTACT RESISTANCE 20 MΩ MAX
- INSERTION FORCE :0.75 N MAX /CONT
- EXTRACTION FORCE: 0.15 N MIN /CONT
- INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

1. LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BS,C,201844,003)
2. THIS PRODUCT IS CSA APPROVED
- THIS PRODUCT IS UL RECOGNISED
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

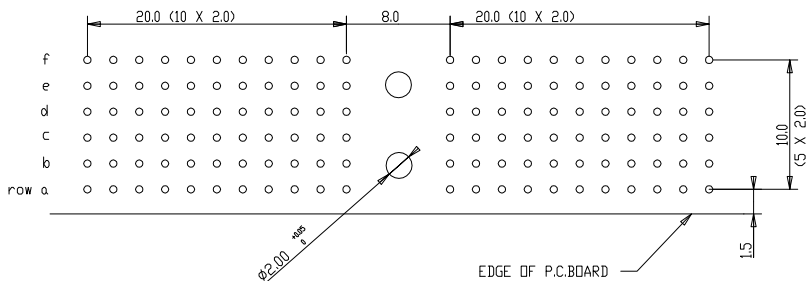

Material		Spec ref		tolerance	projection	MM
Mat code		Heat treat		±0.05	±0.10	±0.20
Plating/Finish						
rev	ecn no	dr	date	Dr	4 2 92	J.V.B
A	000000	KN	14-9-01	Eng		
B	3505-0278	Guo.M	03/08/05	Chr		
C	3507-0362	Kason	05/09/07	Appr		
D	3508-0110	NZ	03/22/10			
				Product family		MILLIPACS
				Model Name		HMER01PA5101----
				Model Revision		ECN
				REL Level		REL Level
				Part No		BS,C,201444,001
				Conn Type		CONN TYPE A
				Title		MPACS 5+2R RA RCP
				Part No		BS,C,201444,001
				Rev		D
05	DEC 9 2546	RN	110608	Prd/E File	catalog no	HMER01PA5101----
				CUSTOMER DRAWING		sheet 1 of 1