RAFIX 22 QR - Signal indicator, round collar, high


1.74.505.511/1600



R


General information	
Form of lens	high lens
Color of lens	transparent blue
Legend insert accomodation	
Form of collar	round
Dimensions	
Dimensions of collar	ø 29.8 mm
	<u>9 29.8 mm</u> 14.2 mm
Overall height	
Mounting depth	56.4 mm
Mounting hole	ø 22.3 mm
Mounting grid	50 x 30 mm
Mechanical design	
Mounting	ring nut
Illuminability	yes
Electrical characteristics	
Protection class	-
Other specifications	
Degree of protection from front side	<u>IP65 (DIN EN 60529)</u>
Ambient temp. operating min.	-25 °C
Ambient temp. operating max.	+70 °C
Storage temperature min.	_40 °C
Storage temperature max.	+80 °C
Environmental restistance	acc. to IEC 60068-2-14, -30, -33 and -78
ROHS compliant	yes
REACH compliant	yes


Panel cut-out to IEC 60947-5-1

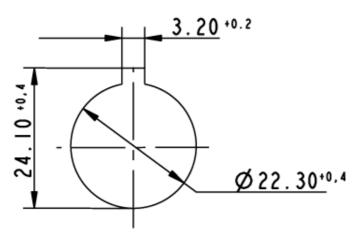

Technical data are approximate and intended solely for general orientation in the selection of a product. Subject to modifications and errors. Images and other graphics may only be similar. For more information, refer to www.rafi.de chapter Imprint / Data Protection.







Technical data are approximate and intended solely for general orientation in the selection of a product. Subject to modifications and errors. Images and other graphics may only be similar. For more information, refer to www.rafi.de chapter Imprint / Data Protection.