

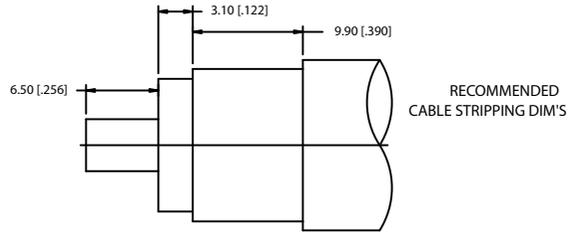


REV.	DATE	DESCRIPTION
NC	09/26/02	INITIAL RELEASE

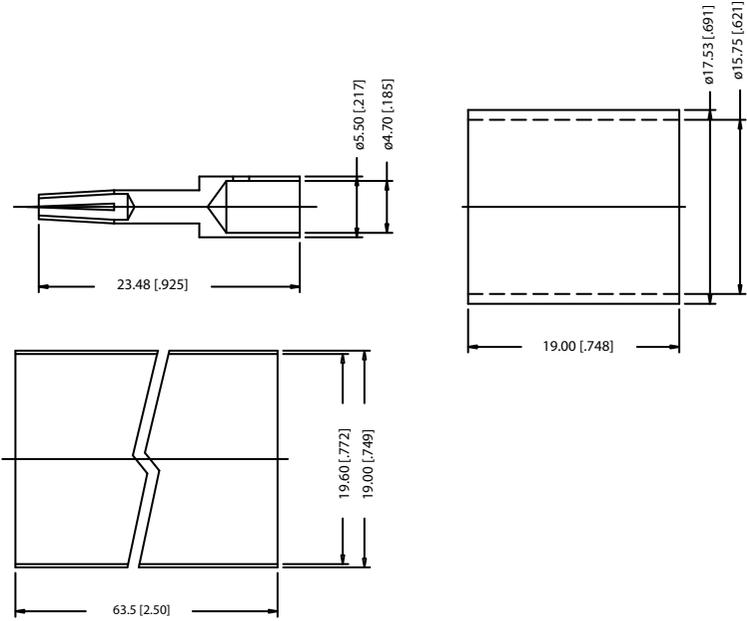

RECOMMENDED
CABLE STRIPPING DIM'S

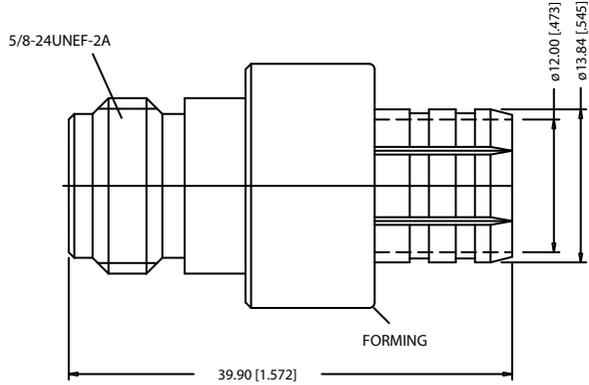

8			
7			
6			
5	HEAT SHRINK		
4	FERRULE	JIS H3250	NICKEL
3	CONTACT PIN	PHOS. BRONZE	GOLD
2	INSULATOR	TEFLON	NATURAL
1	BODY	BRASS	NICKEL
	DESCRIPTION	MATERIAL	FINISH

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE
	DRAWN G.R.S.	09/26/02
	CHECKED	
	ISSUED	
DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:	
	.XXX = ± 0.005"	
	.XX = ± 0.010"	
	.X = ± 0.020"	
DO NOT SCALE DRAWING		

Amphenol - Connex			
CONNECTOR CORPORATION			
TITLE N CRIMP JACK - LMR 600 CABLE (REVERSE POLARIZED)			
SIZE A	FSCM NO. 99001	DWG. NO. 172207.DWG	REV. NC
SCALE NA	PART NO. 172207	SHEET 1 OF 1	