

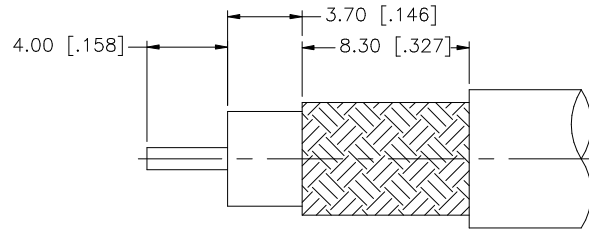
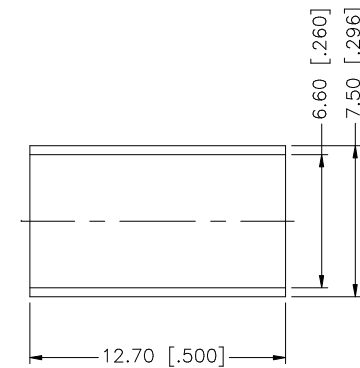


REV.	DATE	DESCRIPTION
A	11/14/97	ADD CONTACT PIN
B	07/01/04	UPDATE DRAWING FORMAT
C	02/21/06	ADD "B1695A" TO PART DESCRIPTION / .255" HEX CRIMP



RECOMMENDED CABLE
STRIPPING DIMENSIONS

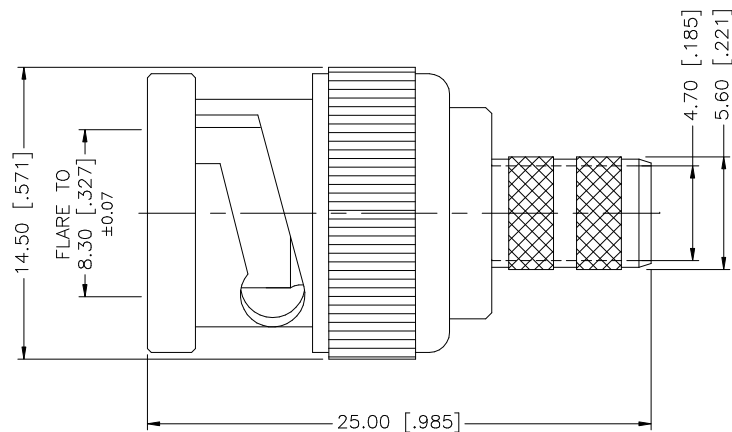

NOTE:

1. CRIMPED FERRULE – HEX CRIMP SIZE .255"
2. CRIMPED CONTACT PIN – HEX CRIMP SIZE .068"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.						02/21/06	
7						CHECKED								
6						ISSUED								
5	FERRULE	COPPER	NICKEL	1			SHEET	1 OF 1		PART DESCRIPTION				
3	CONTACT PIN	BRASS	GOLD	1					BNC CRIMP PLUG (FOR RG-6/U, B1695A PLENUM CABLE)					
2	INSULATOR	DELTRIN	NATURAL	1					PART NO.					
1	BODY	BRASS	NICKEL	1					112519					
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE		DWG. NO.		REV.	SIZE	SCALE
								C:/112/112519.DWG		112519.DWG		C	A	NA