


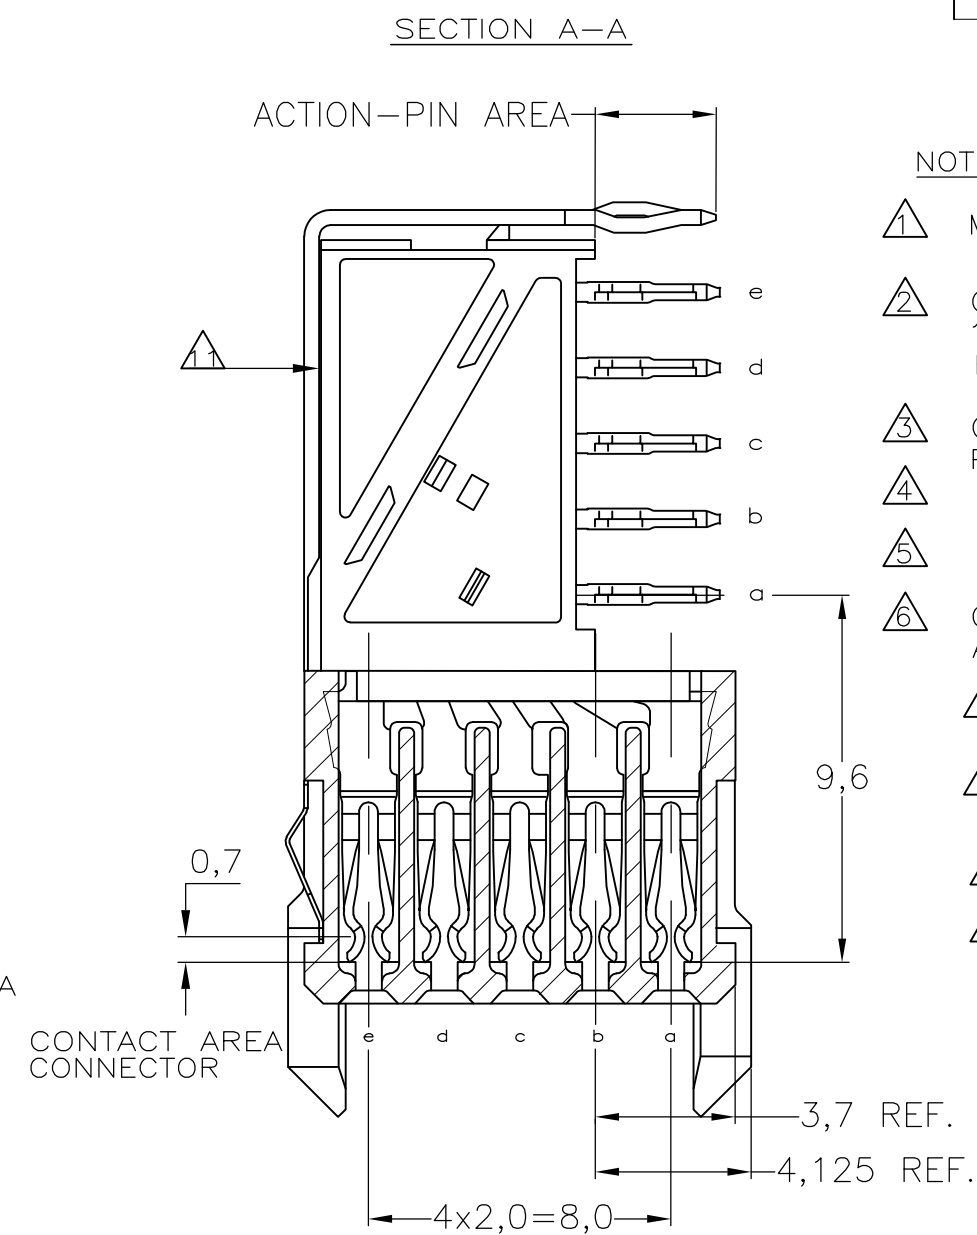

① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)

② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.

③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.

⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.

⑥ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.

⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.


⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID

⑩ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD


⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE

⑫ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
13 BASIC P.N. LOWERSHIELD: 338108

REF. ⑬ 0.76μm MIN GOLD PLATING AT MATING SURFACES.

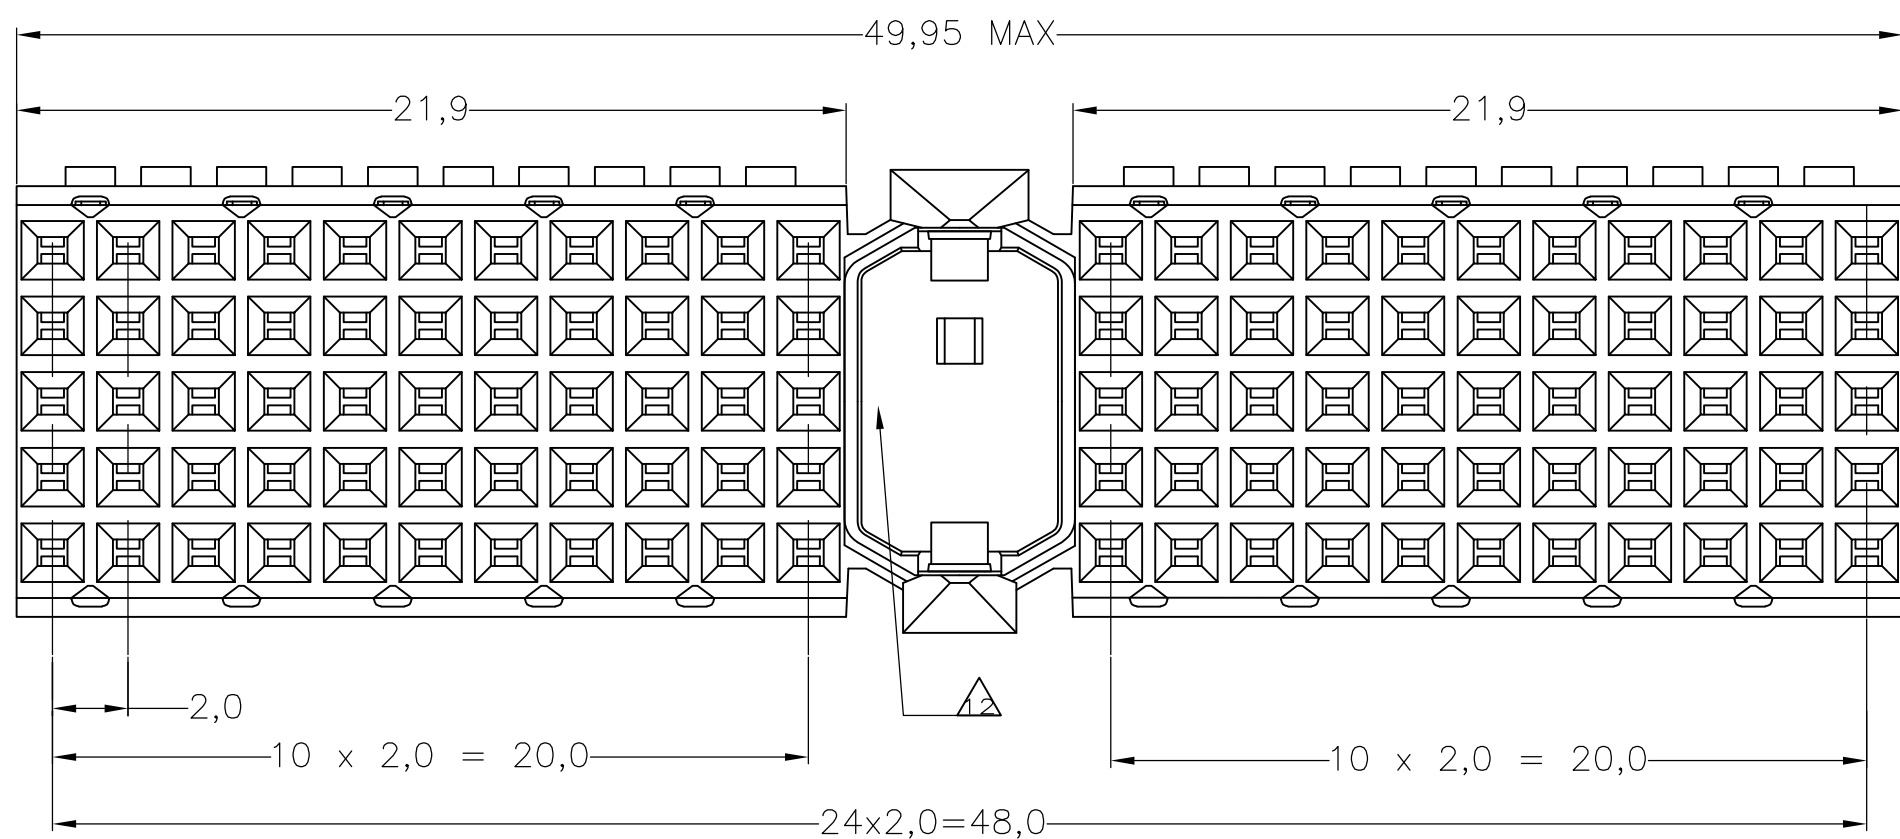

		3-352068-0
		—352068-9—
		—352068-4—
		352068-1
FINISH	MATERIAL	PARTNUMBER

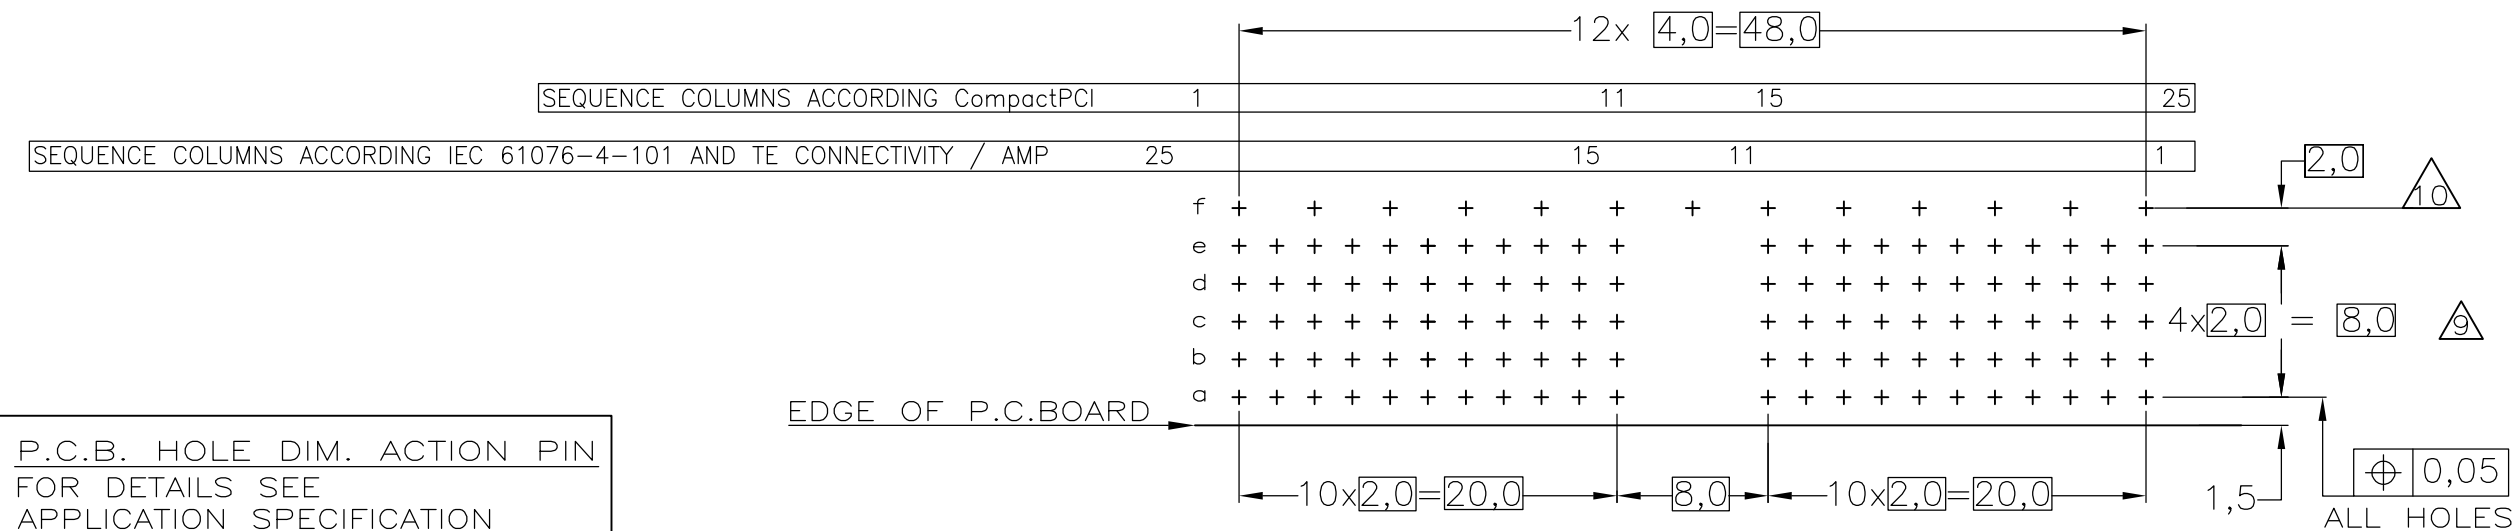

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUEN		20JAN97		 TE Connectivity	
		CHK —		—			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		Z-PACK 2MM HM TYPE A - 25 COLUMNS PRE-SHIELDED RECEPTACLE			
mm							
		0 PLT ± —					
		1 PLT ± — ±0.2					
		2 PLT ± —					
		3 PLT ± —					
4 PLT ± —		APVD —		NAME			
ANGLES		PRODUCT SPEC		108-19082			
FINISH		APPLICATION SPEC		114-19029			
MATERIAL		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
—		0.000000		A2	00779	C-352068	—
CUSTOMER DRAWING						SCALE	N.TS
						SHEET	1 of 1
						REV	N