


D


C

B

A

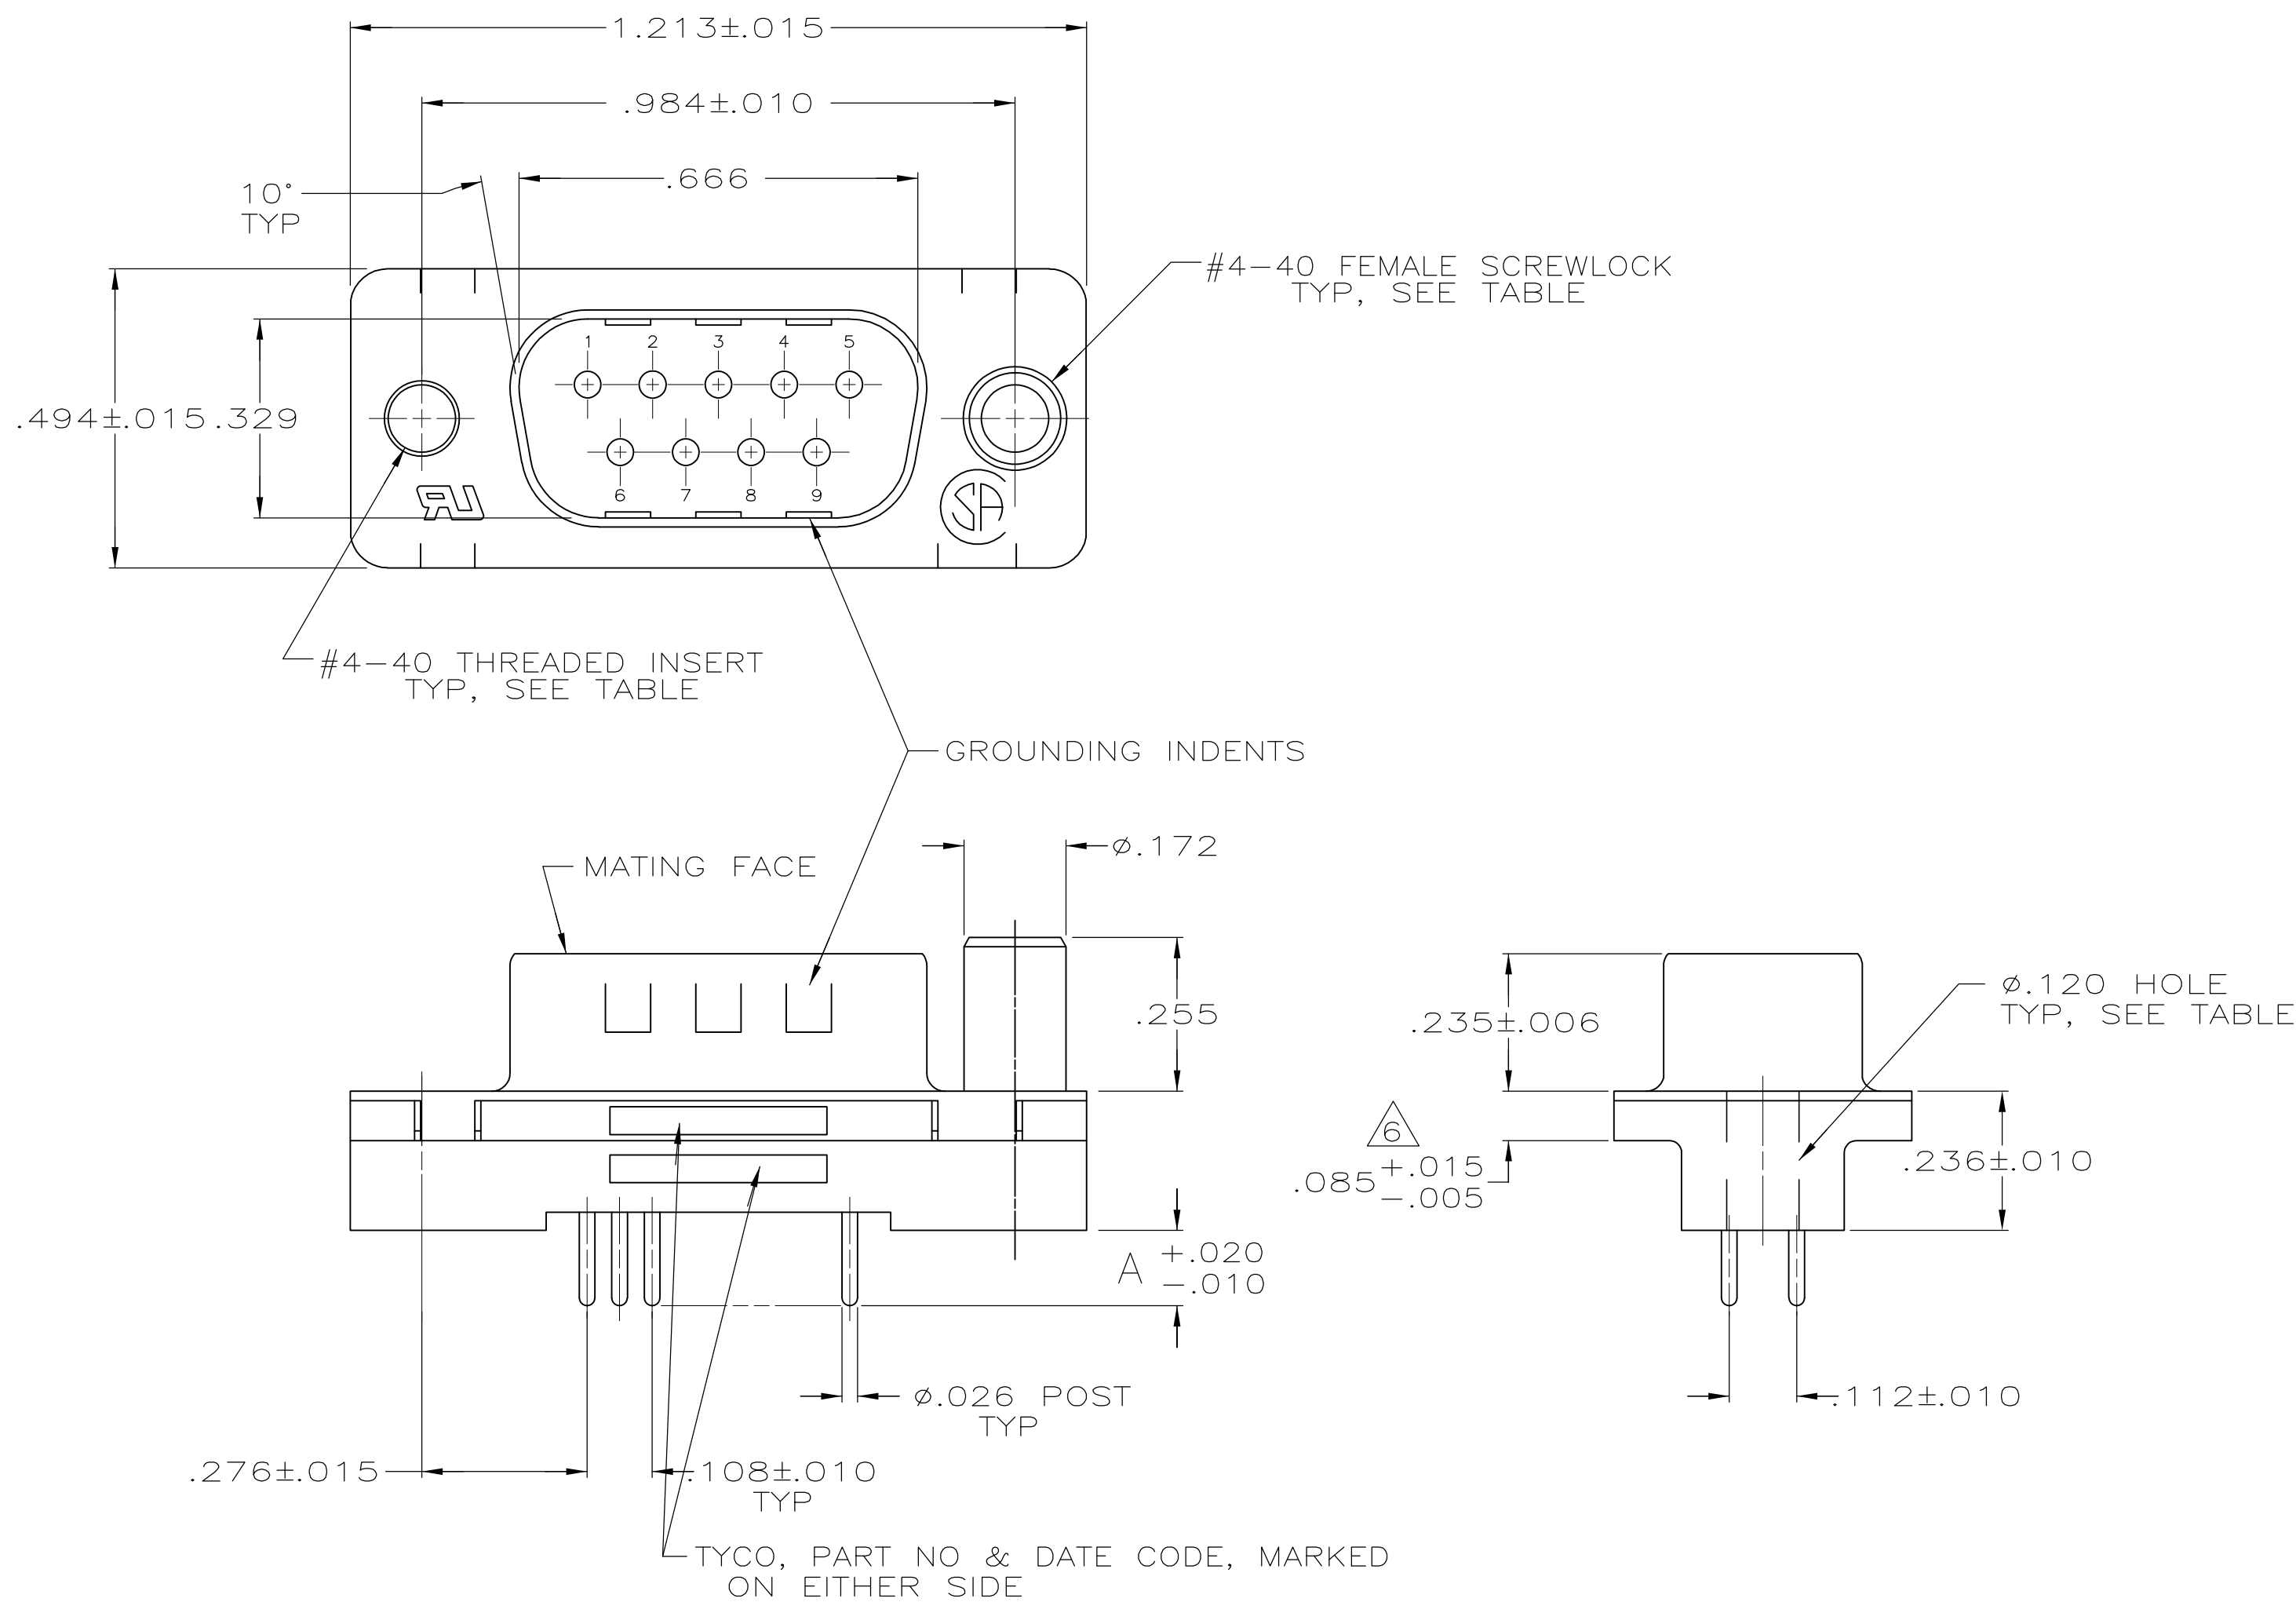

- 1 HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK. SHELL: STEEL. CONTACTS: BRASS. SCREWLOCKS: ZINC. INSERTS: BRASS.
- 2 SHELL: .000200 MIN TIN OVER .000100 MIN COPPER. CONTACTS: SEE TABLE. SCREWLOCKS: CLEAR CHROMATE. INSERTS: UNPLATED.
- 3 GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, GOLD FLASH IN MATED AREA, .000100 MIN TIN FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.
- 4 GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, .000030 MIN GOLD IN MATED AREA, .000100 MIN TIN FOR A LENGTH DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL. -OR- GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR A LENGTH OF .150 MIN FROM MATING END, .000030 MIN PALLADIUM NICKEL IN MATED AREA, .000100 MIN TIN FOR A LENGTH OF DIMENSION A FROM OPPOSITE END, ALL OVER .000050 MIN NICKEL.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 6 .110 MAX IN SHELL TAB CLINCH AREAS.

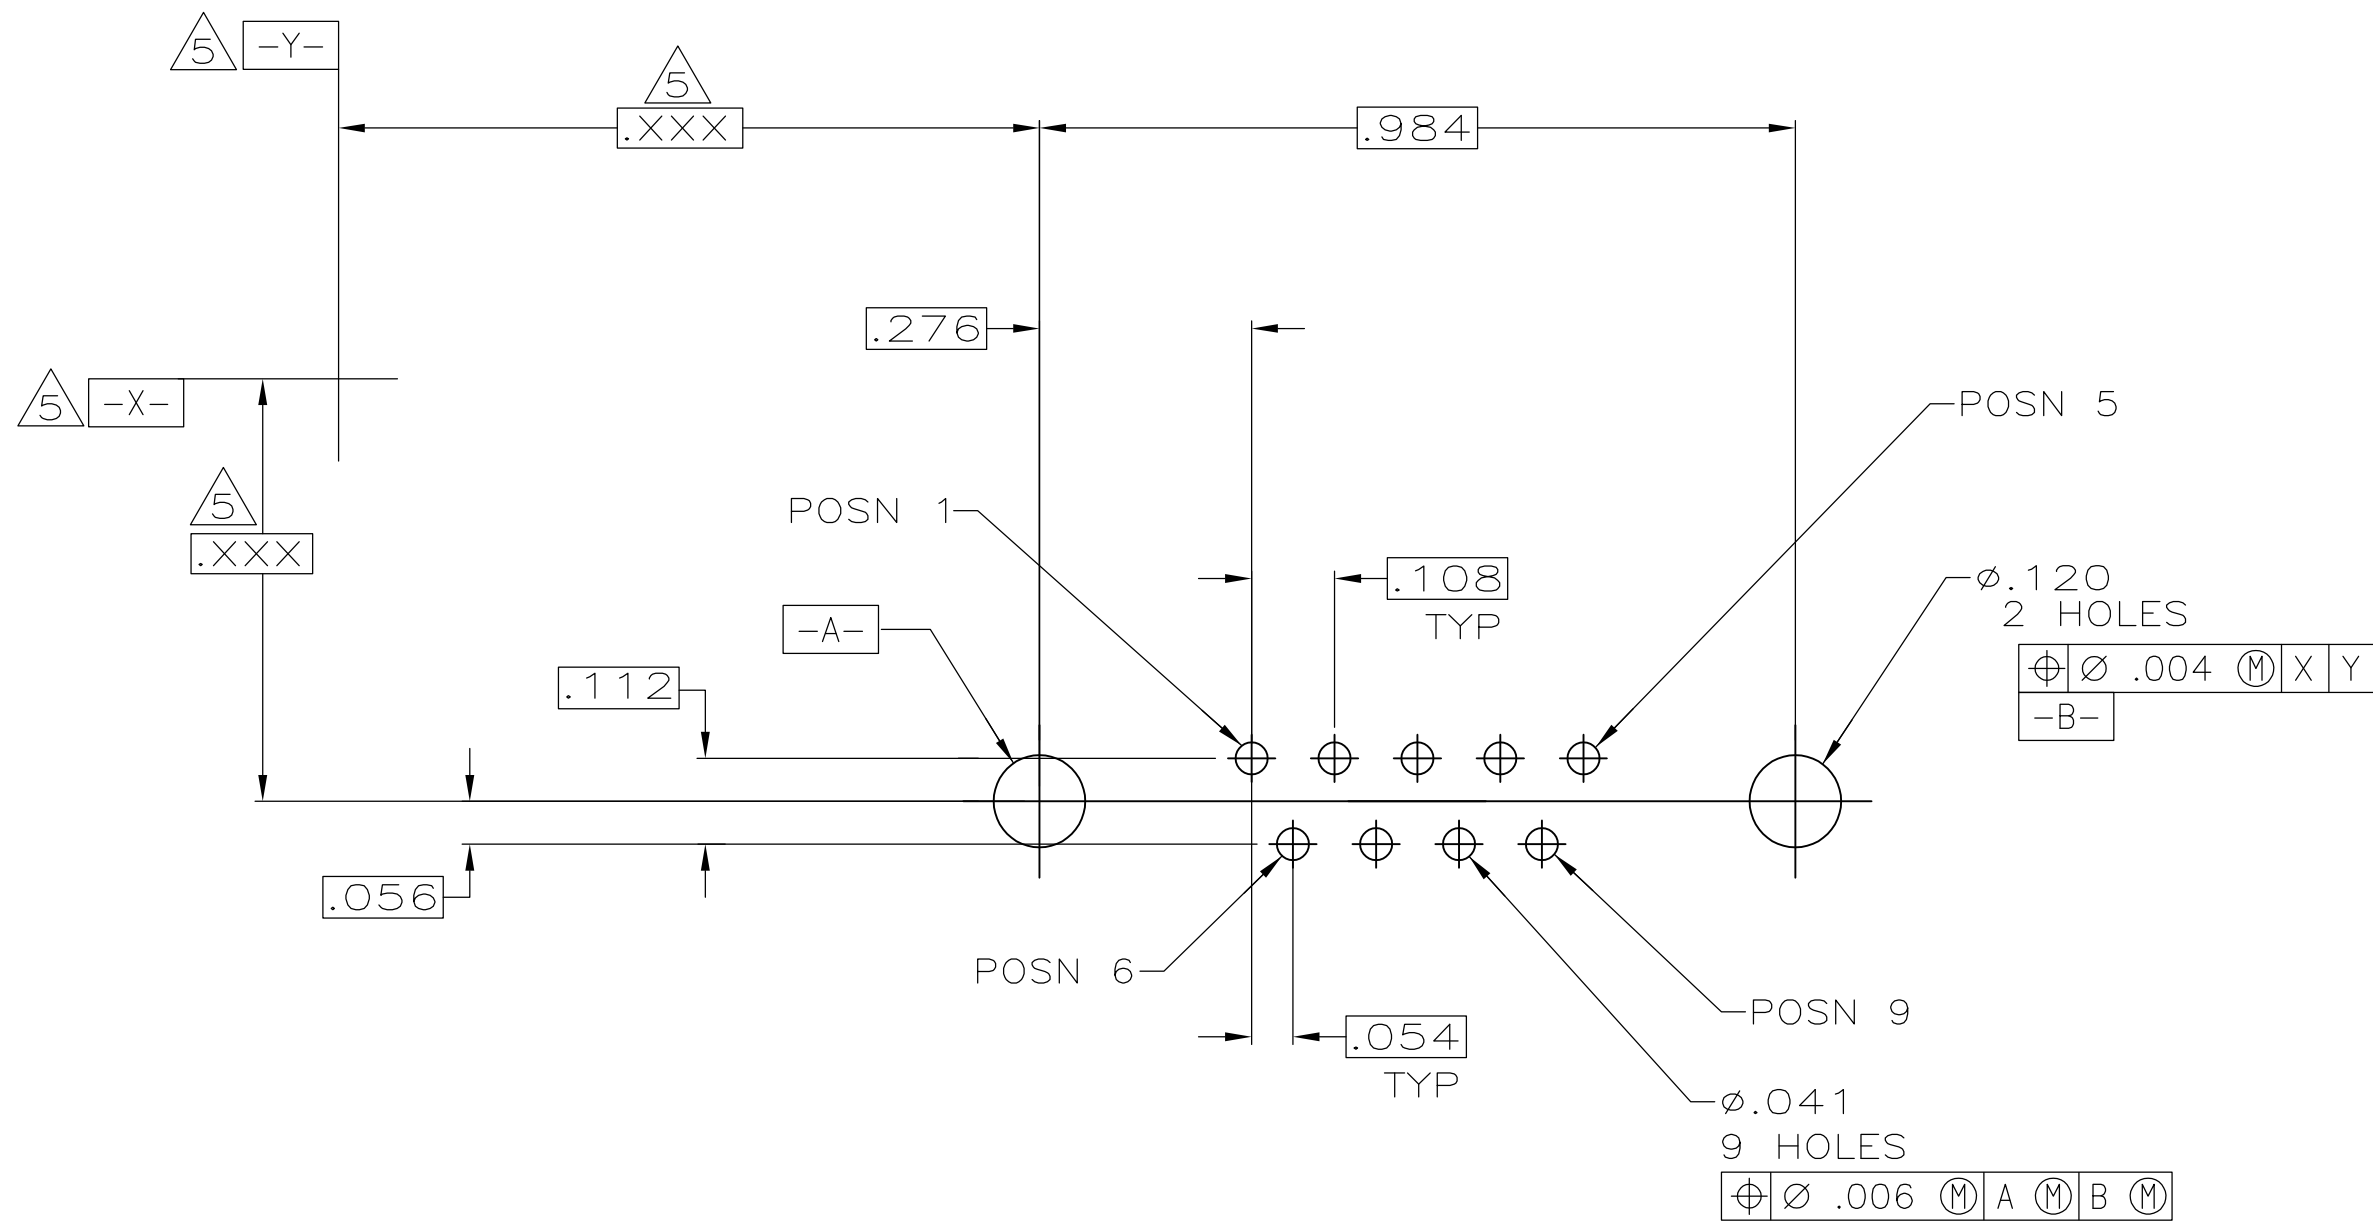

RECOMMENDED PC BOARD
MOUNTING DIMENSIONS

**COPYRIGHT 2005
TE CONNECTIVITY CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LATTUCA	28SEP05	TE TE Connectivity	
		CHK S. BOLASH	28SEP05		
DIMENSIONS: INCHES		APVD M. WALMSLEY	28SEP10	NAME	
		PRODUCT SPEC		PLUG ASSEMBLY, SIZE 1, 9 POS, VERTICAL, FRONT SHELL, AMPLIMITE HDP	
		APPLICATION SPEC			
		WEIGHT			
		CUSTOMER DRAWING			
		SCALE	1:1		
		SHEET	1 of 1		
		REV	B1		