

**Specification Status: Released**




**Maximum Electrical Rating**  
**Operating Voltage: 12Vdc**  
**Interrupt Current: 100A**


Chip Size: 3 X 12mm

Leads: Nickel 1/4H  
0.125mm nominal thickness

Tape: Polyester (White)  
13mm nominal width

Solder: Lead-free

Marking: (Color: Green)  
 Manufacturer's Mark  
 Part Identification  
 Lot Identification

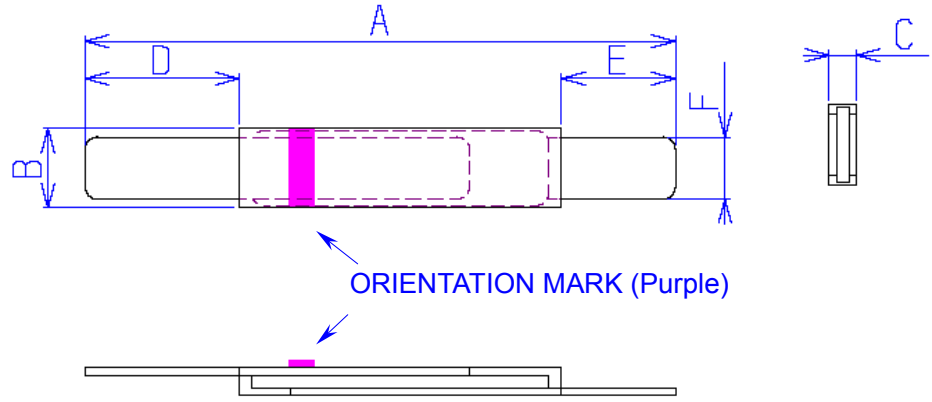

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F		G	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	23.0	24.5	2.9	3.3	0.5	0.8	4.7	7.2	3.8	5.4	2.4	2.6		
in*:	(0.91)	(0.96)	(0.11)	(0.13)	(0.02)	(0.03)	(0.19)	(0.28)	(0.15)	(0.21)	(0.09)	(0.10)		

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP		REFERENCE RESISTANCE		ONE-HOUR POST-TRIP RESISTANCE		TRIPPED-STATE POWER DISSIPATION
	AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C		AMPS AT 80°C		SECONDS AT 25°C, 8.75A		OHMS AT 25°C		OHMS AT 25°C		WATTS AT 25°C, 12V
HOLD	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX	MIN	MAX	MIN	MAX	MAX
1.75	2.4	5.6	1.75	4.2	0.8	2.0	---	---	---	5	0.017	0.031	0.017	0.062	1.4

Agency Recognitions: UL, TUV, CSA  
 Reference Documents: PS300  
 Precedence: This specification takes precedence over documents referenced herein.  
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.  
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information:**

**ROHS Compliant**

Directive 2002/95/EC  
Compliant

**ELV Compliant**

Directive 2000/53/EC  
Compliant

**Pb-Free**

