
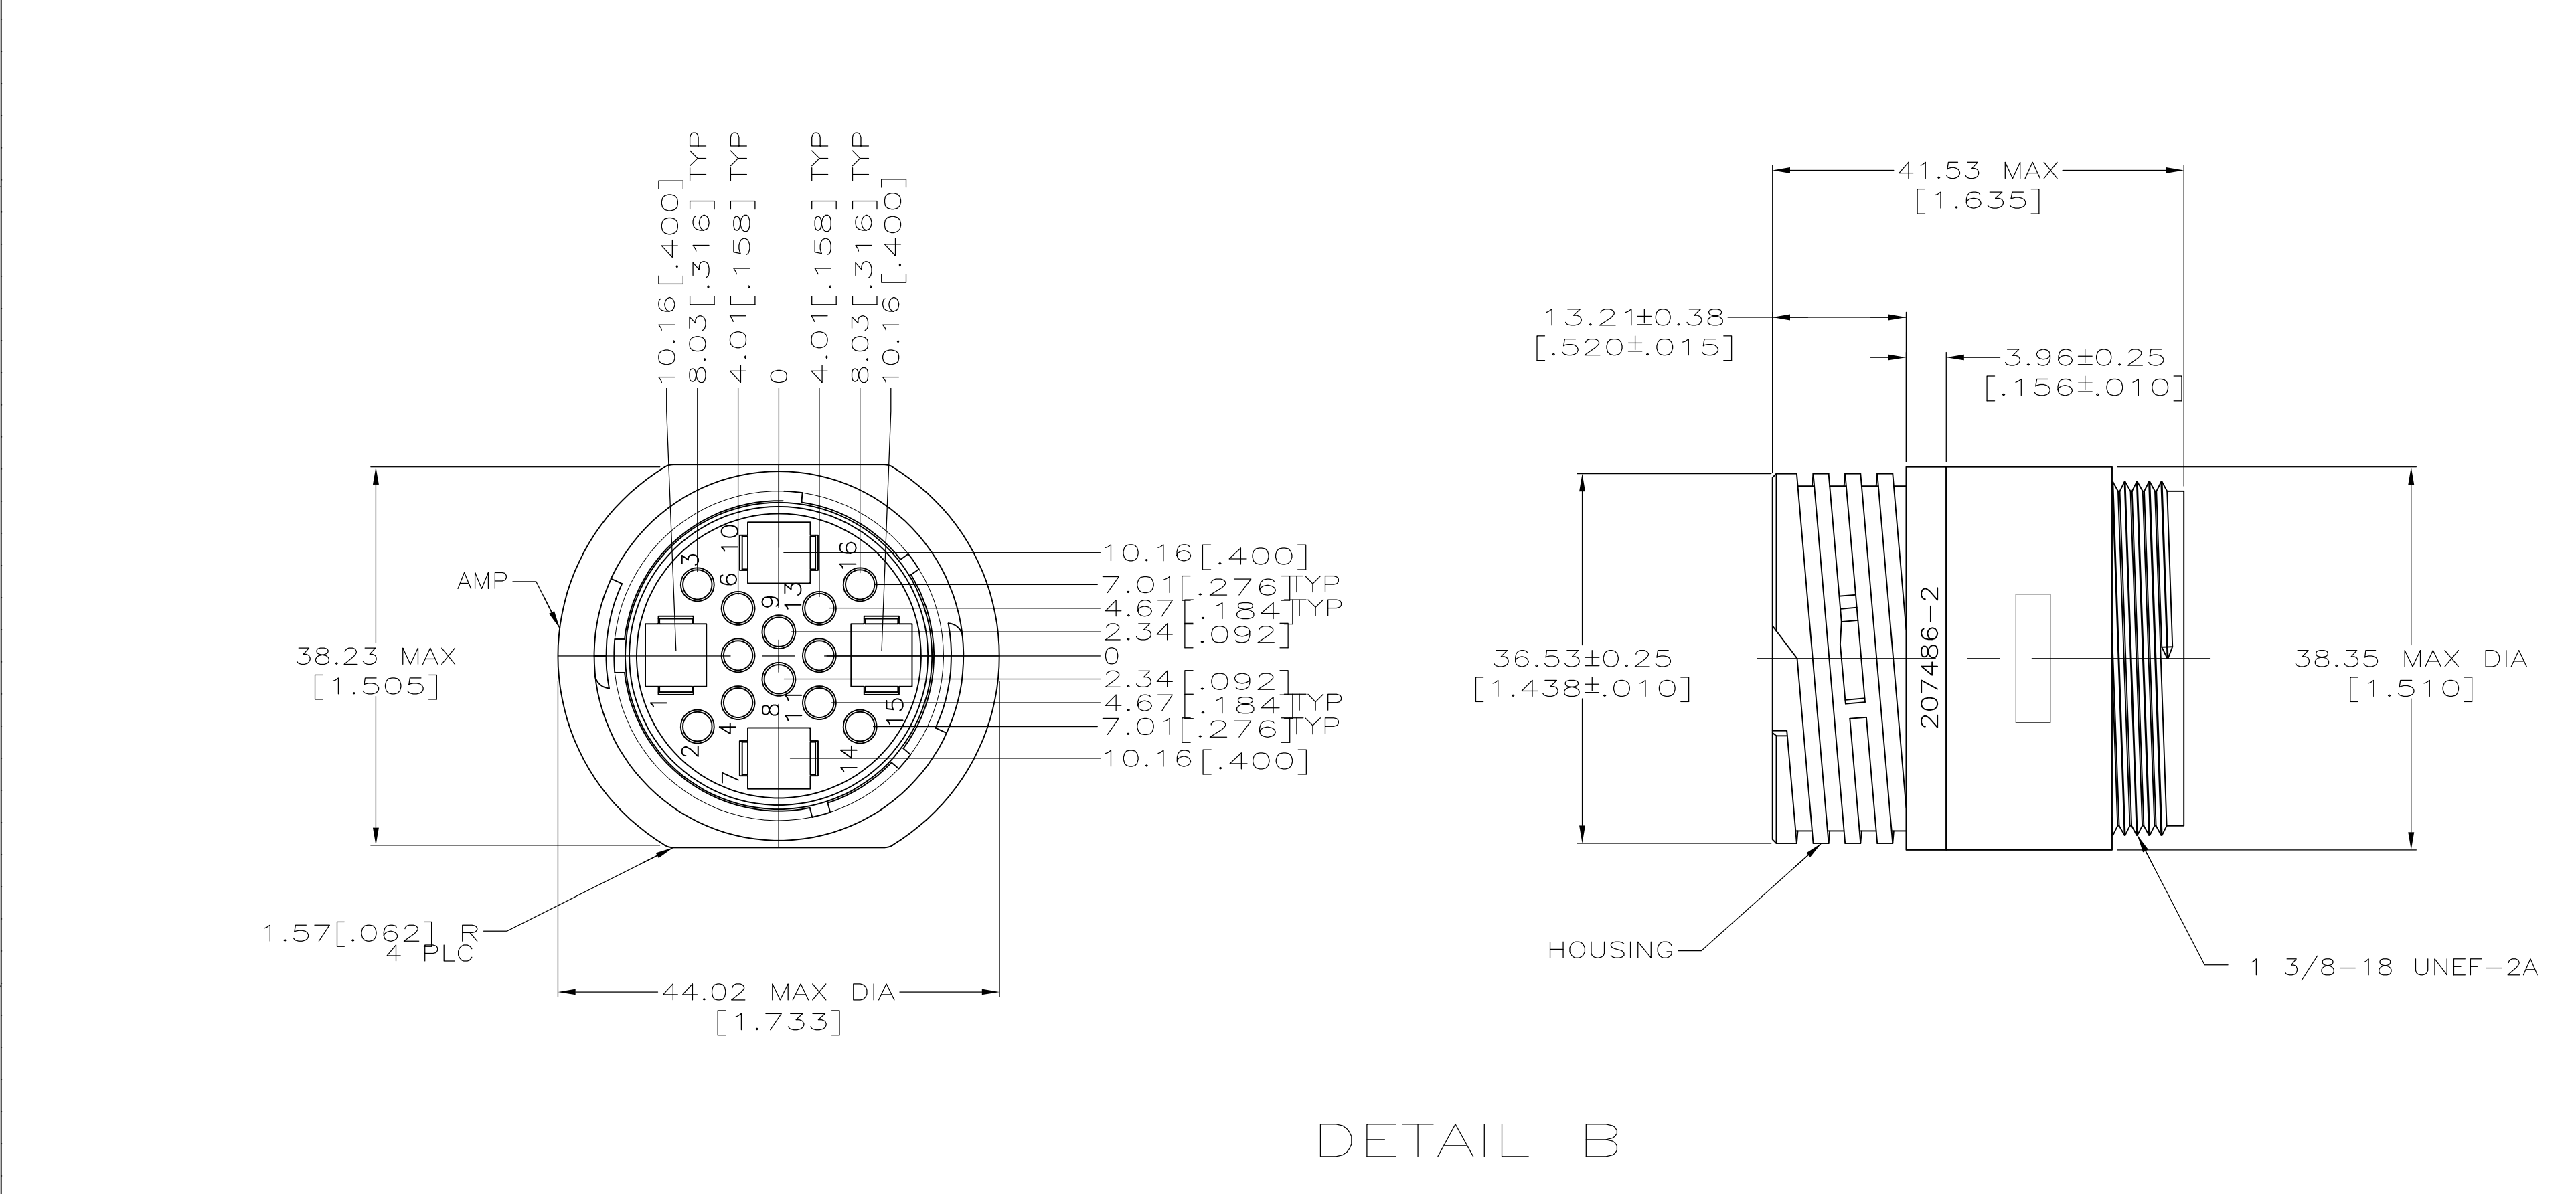


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
P2	REVISED	PER ECO-11-004820	11MAR11	RK	HMR
R	REVISED	PER ECR-16-017870	20APR2017	BDA	MZ

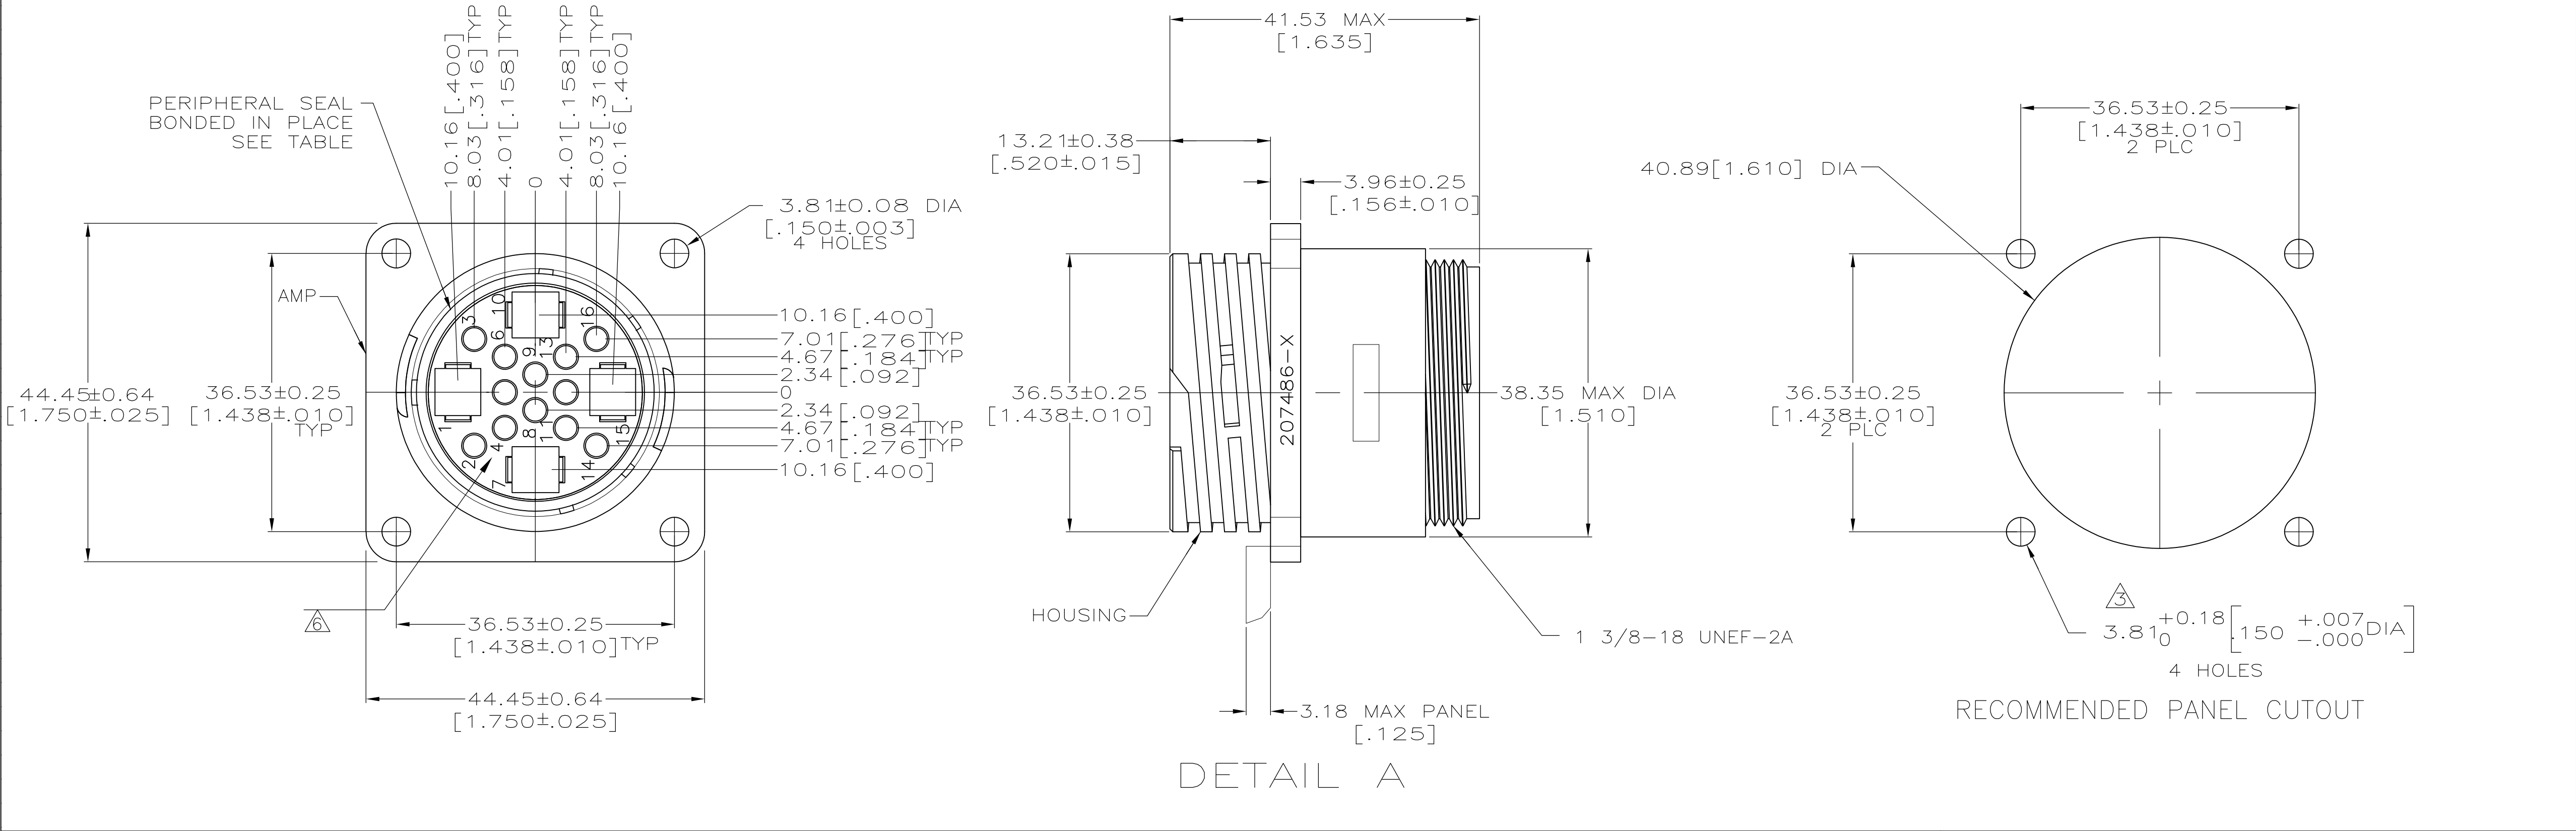

- WILL ACCEPT (12) MULTIMATE AND (4) TYPE XII PIN CONTACTS.
 - CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
 - NO. 4 FASTENERS RECOMMENDED FOR MOUNTING.
 - THIS CONNECTOR WILL ACCEPT INSULATION DIAMETERS UP TO 3.81 [.150].
- HOUSING: NYLON, BLACK.
- PERIPHERAL SEAL: ELASTOMER, GRAY.
- PERMANENT WHITE MARKED OR WHITE INK STAMPED CAVITY IDENTIFICATION.
- HOUSING: NYLON, RED.
- PERIPHERAL SEAL: ELASTOMER, GRAY.
- WHITE DOT NEAR POSITION 1 ON WIRE ENTRY FACE.

OBSOLETE		—	YES	A	1-207486-1
OBSOLETE		—	YES	A	207486-9
PRELIMINARY		—	YES	A	207486-7
		4	YES	A	207486-6
		—	YES	A	207486-5
		—	NO	B	207486-2
		—	NO	A	207486-1
NOTES	THREADED INSERTS	PERIPHERAL SEAL	SEE DETAIL	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M. BINNER CHK R. STONE APVD —	05/26/94 6-23-94 —	 TE Connectivity			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					