

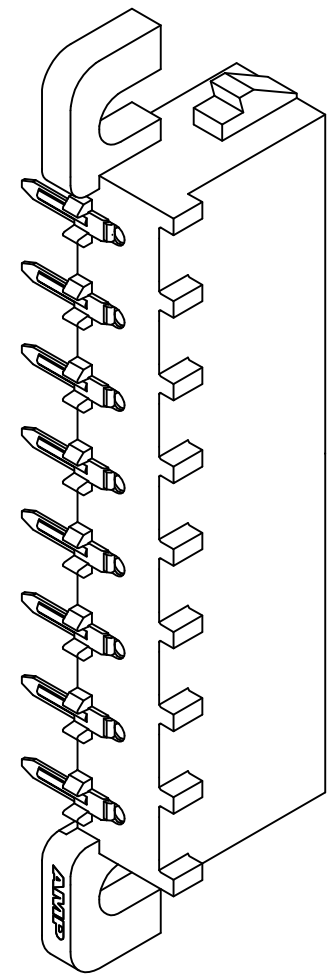
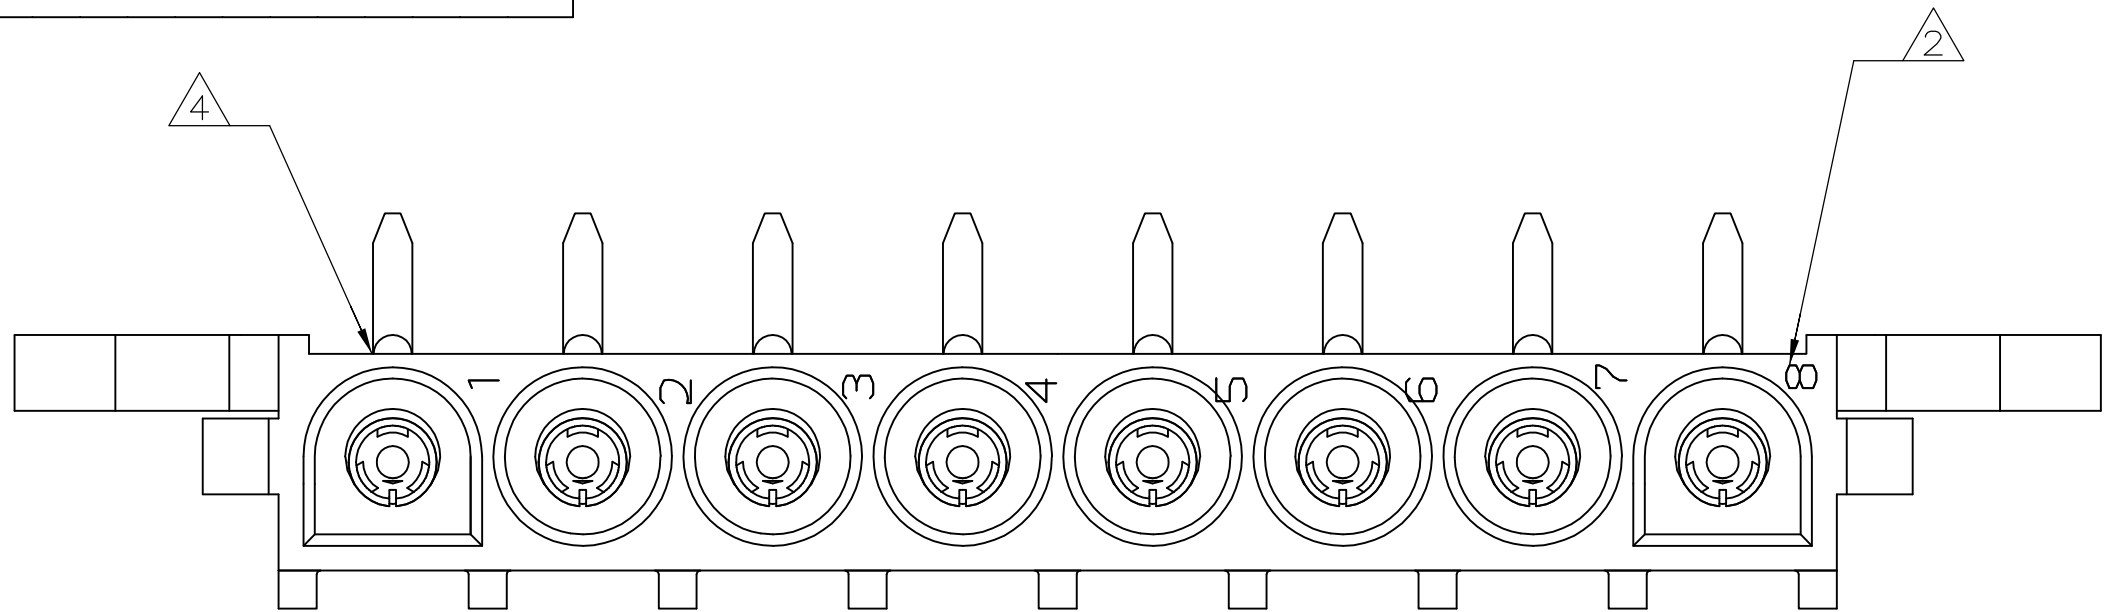
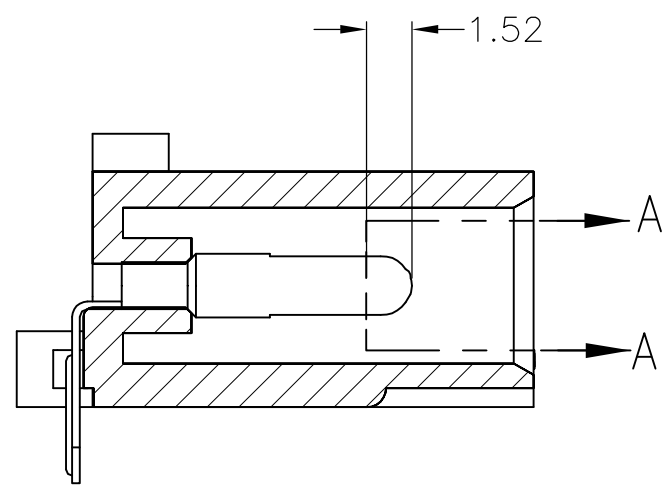


REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
	A1	REVISED PER ECR-17-007706	05JUL2017	JB

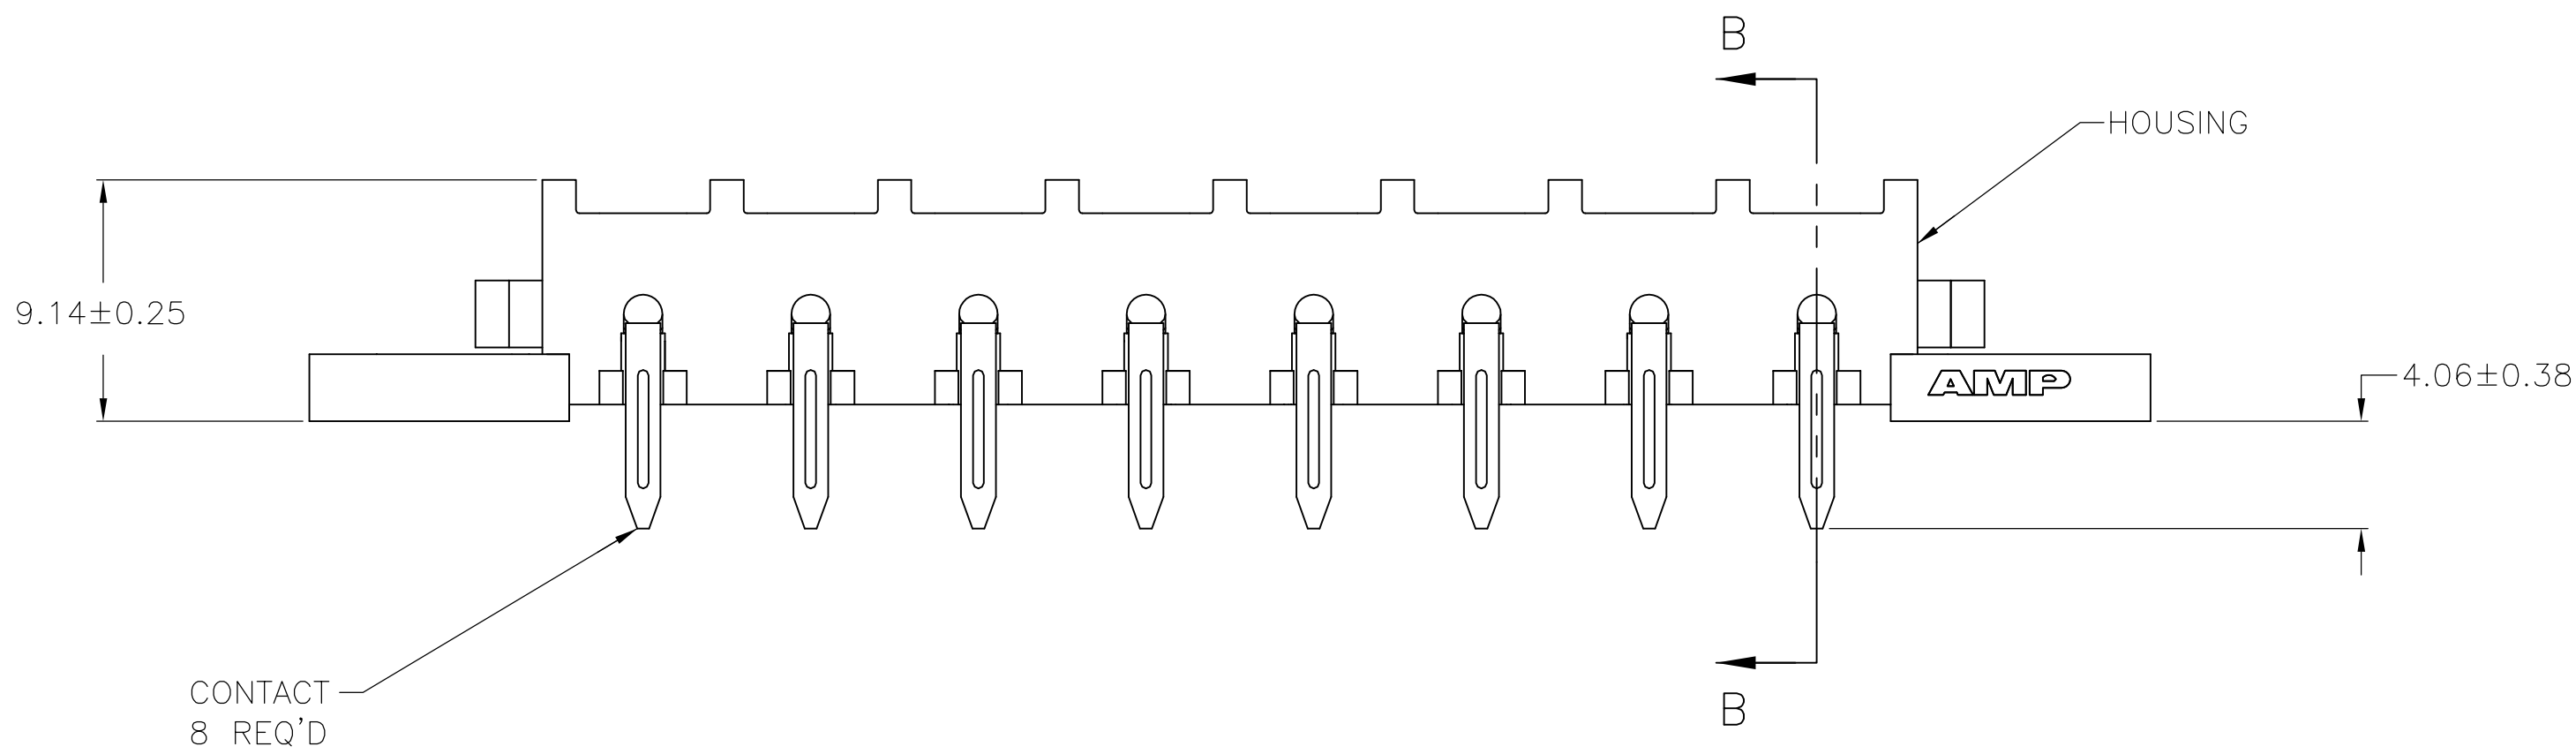


3-DIMENSIONAL MODEL
NTS


- 1 PARTS COMPLY WITH AMP SOLDERABILITY SPECIFICATION 109-11-5.
- 2 CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES,BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
- 3 TOLERANCE NON-CUMLATIVE
- 4 OPTIONAL CONSTRUCTION MAY DELETE THIS RIB.
- 5 FLAMMABILITY UL V-0 FOR THICKNESS 0.4, 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-11-10.
- 6 GLOW WIRE FLAMMABILITY (GWFI): 960°C FOR THICKNESS 0.45, 0.8, 1.6, AND 3.0 PER IEC 60695-2-12.
- 7 GLOW WIRE IGNITION (GWIT): 825°C FOR THICKNESS 0.45, 800°C FOR THICKNESS 0.8, 775°C FOR THICKNESS 1.6 AND 3.0 PER IEC 60695-2-13.

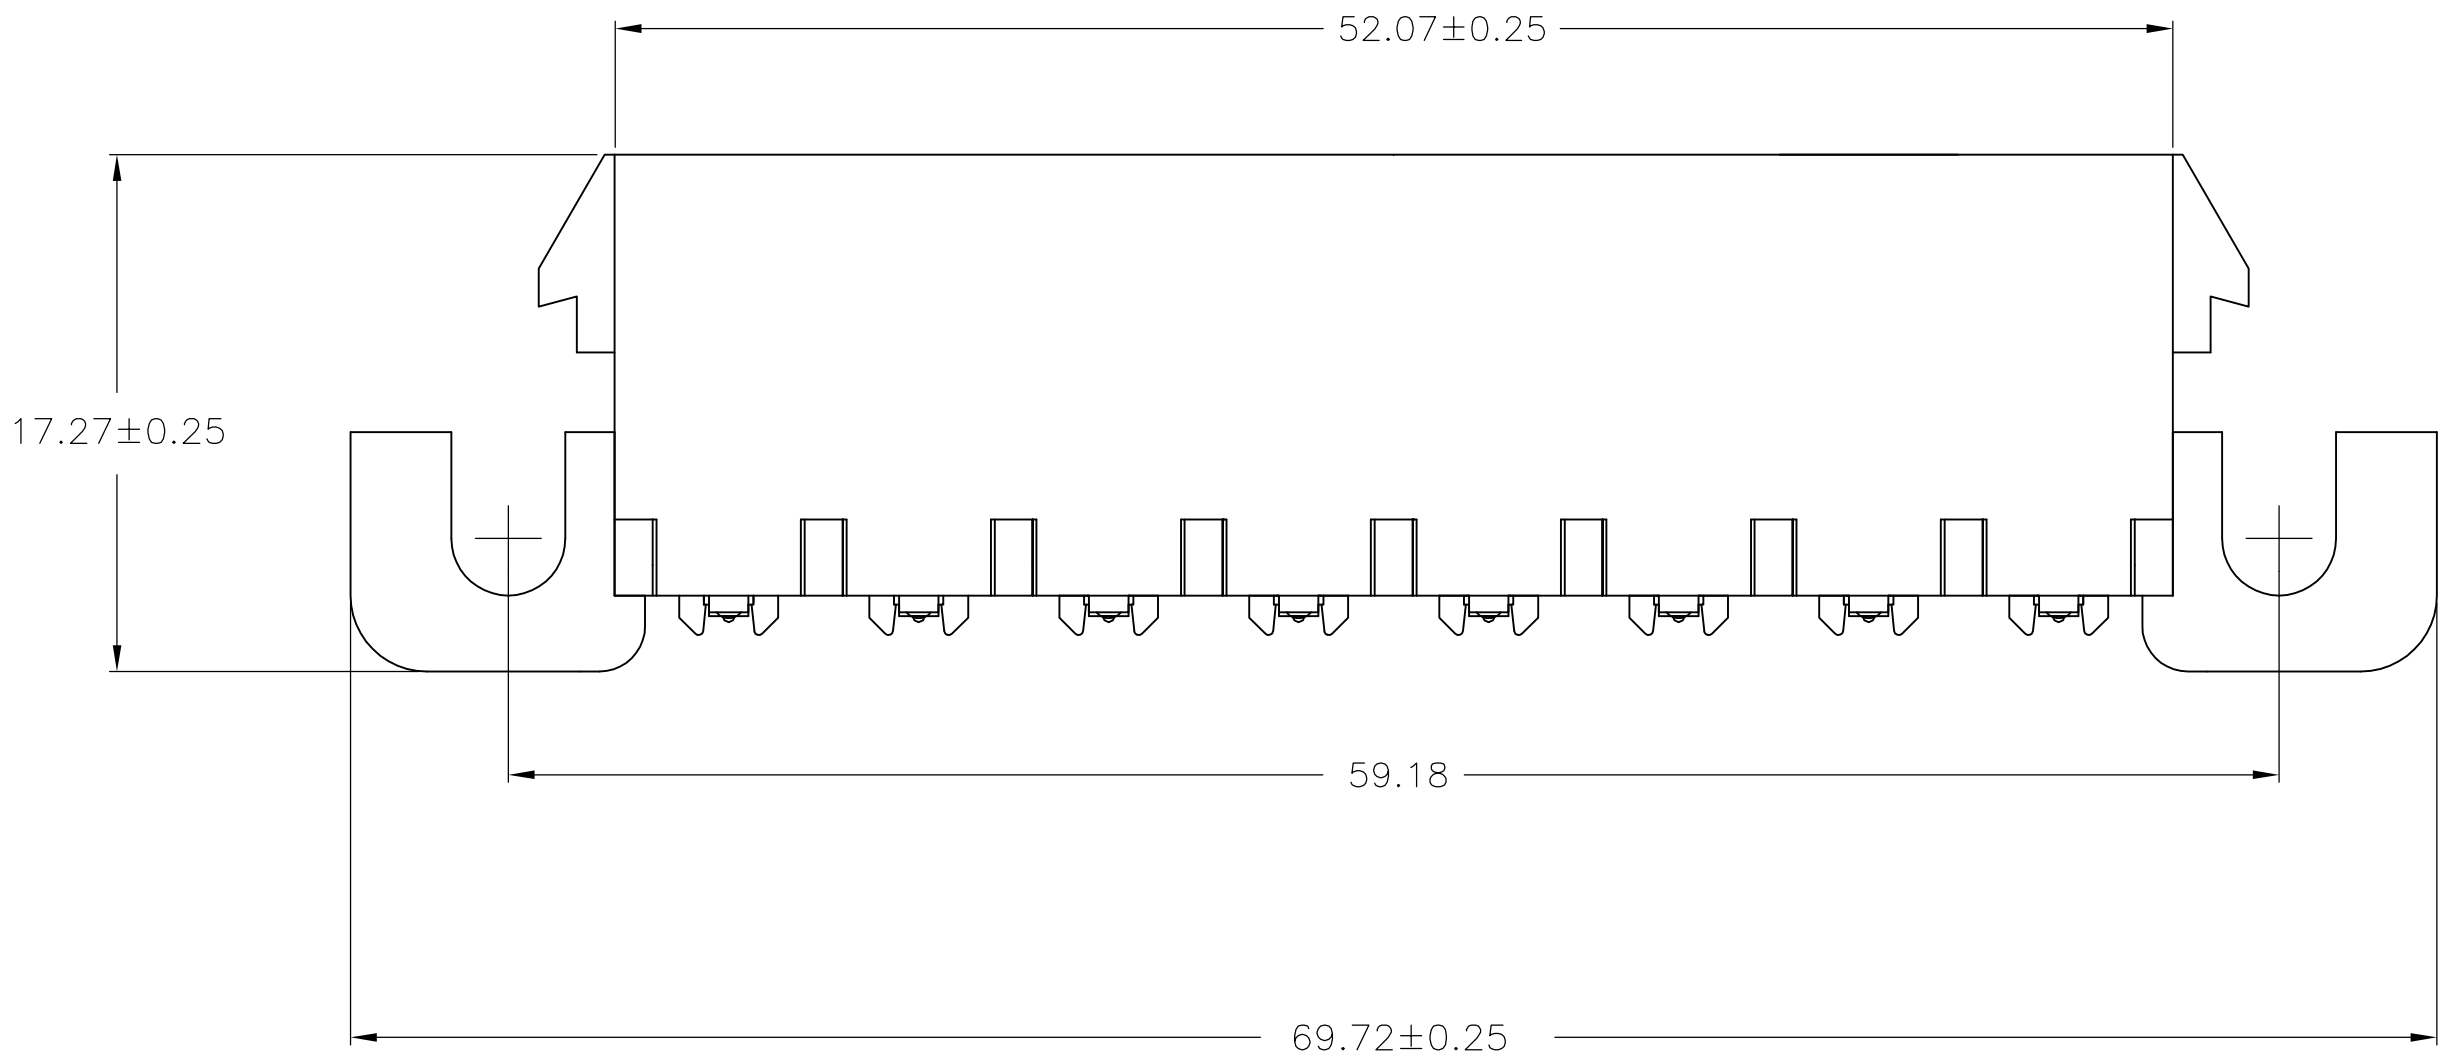

SECTION B-B

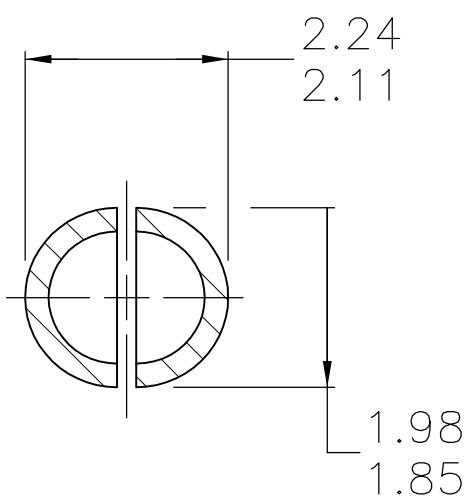

SECTION A-A
SCALE 10:1

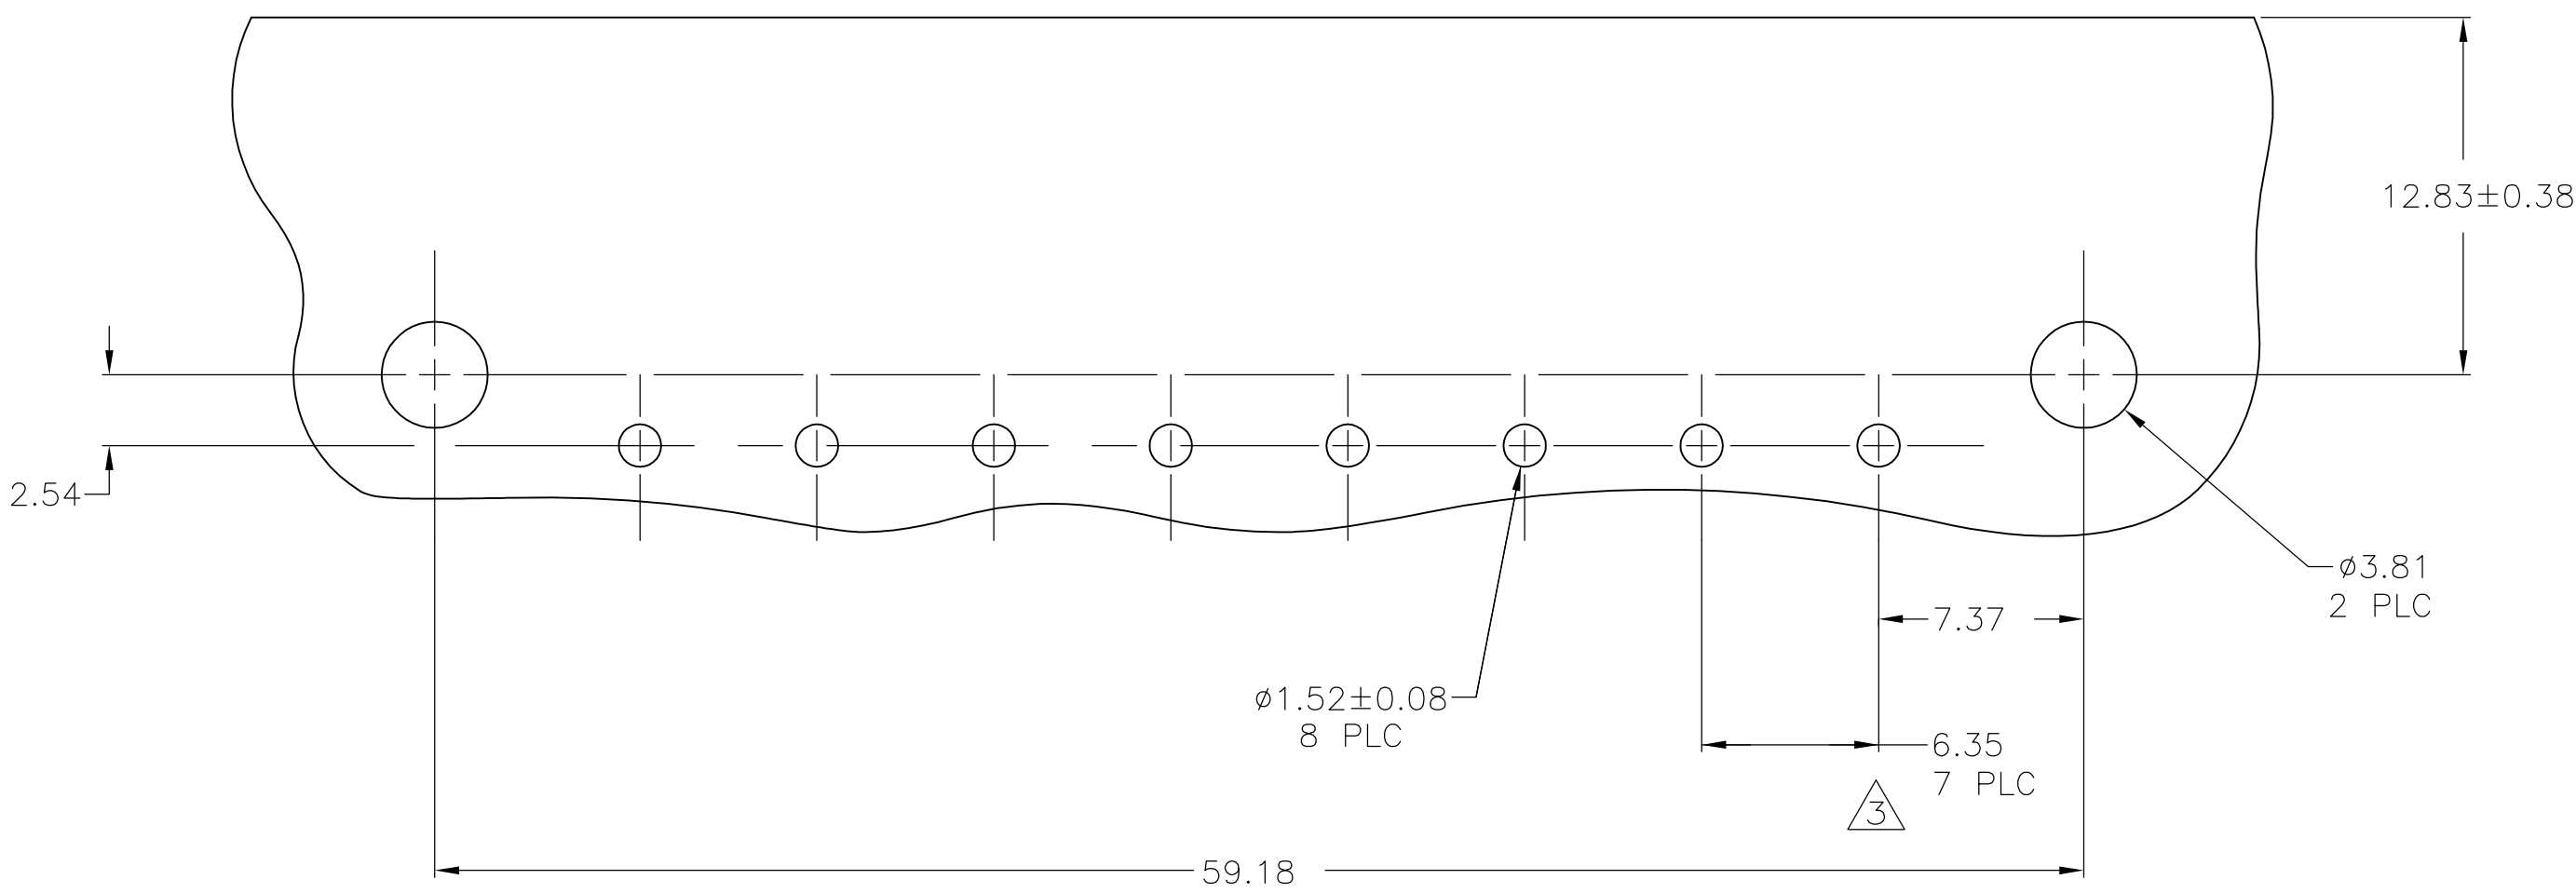

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK P.C. BOARD

2.29	.090	—	—
2.24	.088	69.72	2.745
2.11	.083	59.18	2.330
1.98	.078	52.07	2.050
1.85	.073	17.27	.680
1.57	.062	12.83	.505
1.52	.060	9.14	.360
0.38	.015	7.37	.290
0.25	.010	6.35	.250
0.13	.005	4.57	.180
0.08	.003	4.06	.160
0.00127	.000050	3.81	.150
0.00076	.000030	2.54	.100
MM	IN	MM	IN

CONVERSION TABLE

PH BRZ TIN	NYLON, UL V-0 GW	1969815-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BASVESH WARAD	28DEC2015	STE TE Connectivity	
		CHK WICKES, EVAN	28DEC2015		
DIMENSIONS:		APVD WICKES, EVAN	28DEC2015	NAME	
		PRODUCT SPEC			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		PIN HEADER ASSEMBLY, RIGHT ANGLE MOUNT,8 POSITION, UNIVERSAL MATE-N-LOK(TM)	
MATERIAL		FINISH	WEIGHT	SIZE	
SEE TABLE		SEE TABLE	0.000000	A1 00779	
			CUSTOMER DRAWING	DRAWING NO	
				1969815	
				RESTRICTED TO	
				—	
				SCALE	
				4:1	
				SHEET	
				1 OF 1	
				REV	
				A1	