

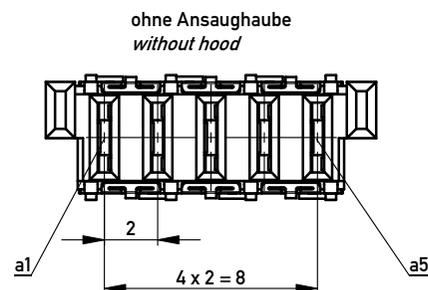



Verpackt in Gurtverpackung  
Tape on Reel Packaging  
Verpackungseinheit: 260 Stück  
Packaging unit: 260 pcs

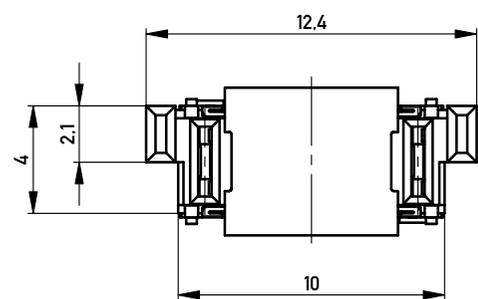

Abspulrichtung - Reel off Direction

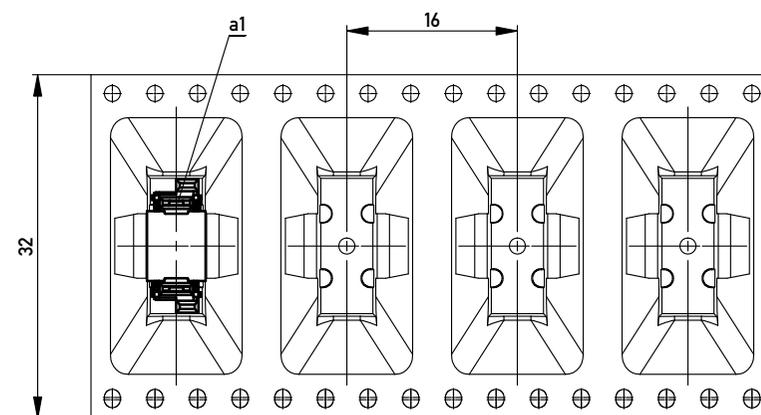

Leiterplatten-Layout Vorschlag / PCB-layout proposal

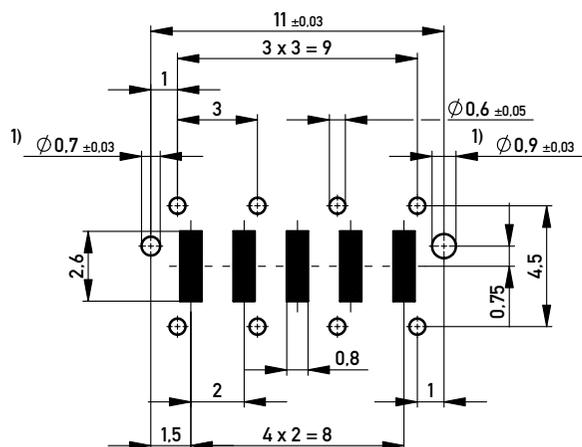

1) Durchmesser des Bohrers / Drill tool

Anforderungsstufe 1  
Performance Level 1

Kontaktbereich vergoldet  
Mating Area gold plating

Anschlussbereich verzinkt 4-6µm  
Terminal Area 4-6µm tin plating

Koplanarität der Anschlüsse ≤ 0,1mm  
Coplanarity Area of Termination ≤ 0,1mm

Information:	Tolerances	 All Dimensions in mm	Scale	5:1
	All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.			
Subject to modification without prior notice. Drawing will not be updated.	Designation <b>F08 MSpeed BlindMate PM THR</b>		<b>354267</b>	
	www.ERNI.com		Class	MSPEED
b	18.09.2012			I
Index	Date			A3

Copyright by ERNI GmbH. Proprietary notice pursuant to ISO 9006 to be observed.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[354267](#)