121-190
Annular Convoluted Tubing
with External Braid

For non-environmental EMI/RFI applications

How To Order

Product Series		Dash No. (Table I)		Shield/Braid Option (Table III)
121	- 190 -	16	Y	T
	Basic No.		Tubing Option (Table II)	

Table I - Dash Number/Diameter				
Dash No	A Inside Dia		B Outside Dia	
	Min	Max	Min	Max
09	.24 (6.1)	.28 (7.1)	.42 (10.7)	.46 (11.7)
12	.33 (8.4)	.37 (9.4)	.52 (13.2)	.56 (14.2)
16	.45 (11.4)	.50 (12.7)	.64 (16.3)	.70 (17.8)
20	.57 (14.5)	.62 (15.7)	.75 (19.1)	.81 (20.6)
24	.69 (17.5)	.75 (19.1)	.92 (23.4)	.98 (24.9)
28	.81 (20.6)	.87 (22.1)	1.04 (26.4)	1.12 (28.4)
32	.93 (23.6)	1.00 (25.4)	1.16 (29.5)	1.24 (31.5)
40	1.18 (30.0)	1.25 (31.8)	1.40 (35.6)	1.48 (37.6)
52	1.56 (39.6)	1.63 (41.4)	1.81 (46.0)	1.89 (48.0)

Table II - Tubing Option	
Y	Kynar/Thermally stabilized
V	PVDF/Not thermally stabilized
S	Siltem/Medium duty

Table III - Shield/Braid Option	
T	Tin/Copper
C	Stainless Steel
N	Nickel Copper
L	ArmorLite™
D	Dacron
M	Nomex
E	AmberStrand® 100%
F	AmberStrand® 75%/25%

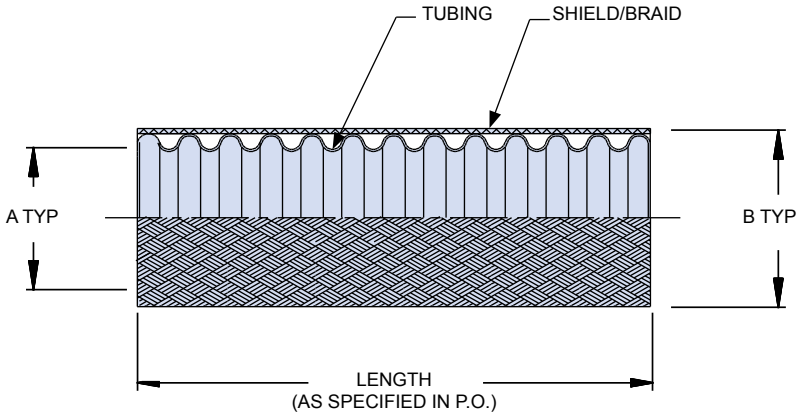

Packaging

Long-length orders of 121-190 braided conduit are subject to carrier weight and box size restrictions. For example, UPS air shipments are currently limited to 50 lbs. per box. Unless otherwise specified, Glenair standard practice is to ship optimal lengths of product based on weight, size, and individual carrier specifications. Consult factory for additional information or to specify packaging requirements.

©2011 Glenair, Inc. CAGE Code 06324 Printed in U.S.A.