

NO.	DESCRIPTION	PART NO.	QTY	MATERIAL	DRW NO.	REMARKS
1	INSULATOR		1	LCP		COLOR:BLACK
2	CONTACT		N	COPPER ALLOY		Au







極 数 NO. OF POS.	A	B	D
10	1.6	4.1	3.2
16	2.8	5.3	4.4
20	3.6	6.1	5.2
24	4.4	6.9	6.0
26	4.8	7.3	6.4
30	5.6	8.1	7.2
34	6.4	8.9	8.0
40	7.6	10.1	9.2
44	8.4	10.9	10.0
50	9.6	12.1	11.2
54	10.4	12.9	12.0
60	11.6	14.1	13.2
64	12.4	14.9	14.0
70	13.6	16.1	15.2
80	15.6	18.1	17.2

注 記
NOTE
1. 型 番
P/N 20 5805 XXX 00X 829 H +
極 数
NO. OF POS.
バリエーション
VARIATION

	ANCHOR PLATE	BOSS	GUIDE POST
0	-	-	-
1	-	◎	-

◎:WITH -:WITHOUT

- ② テール及び金具底面の相互の輪郭度は、0.1MAX.
COPLANARITY OF CONTACT TAIL AND
ANCHOR PLATE IS 0.1MAX.
- ③ 凸凹無き事。
FLAT KEEPING AREA

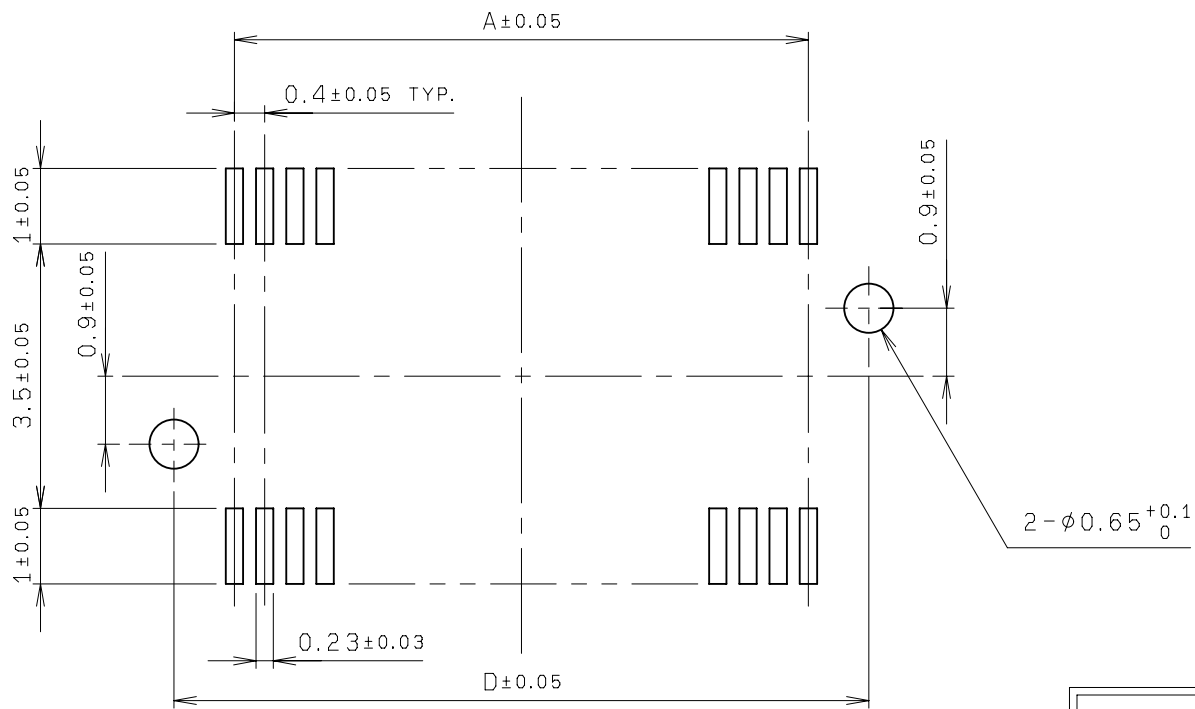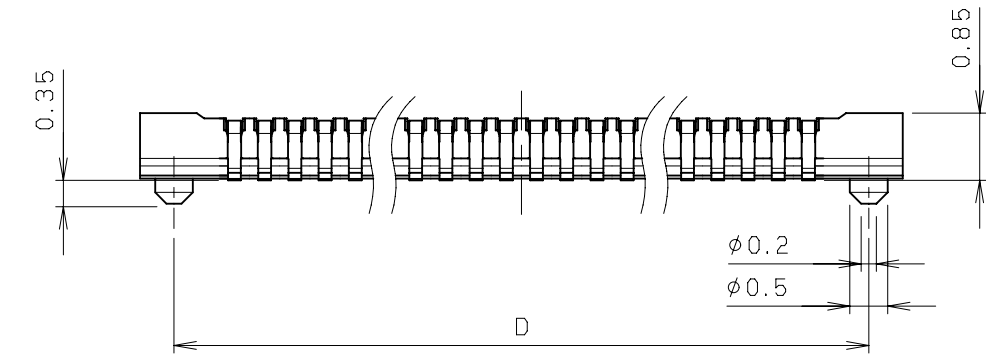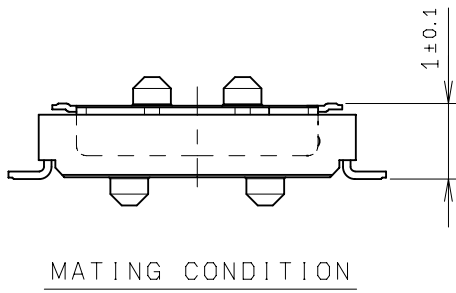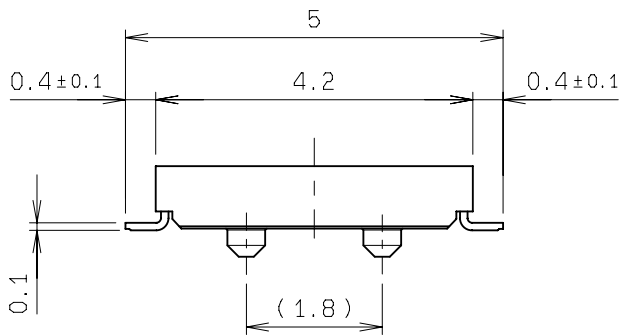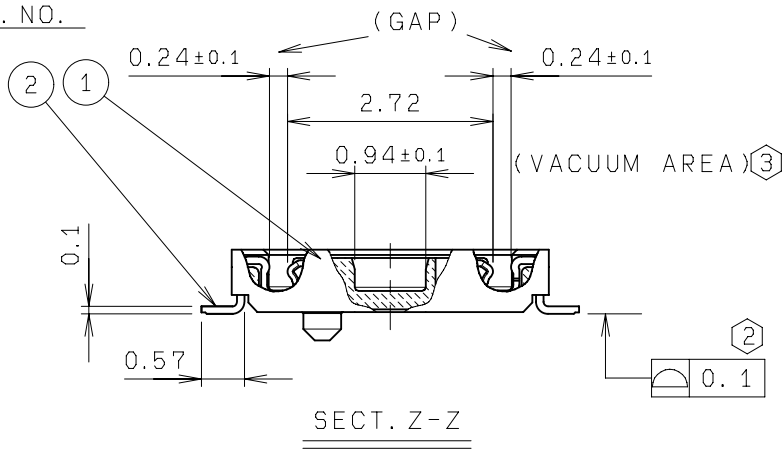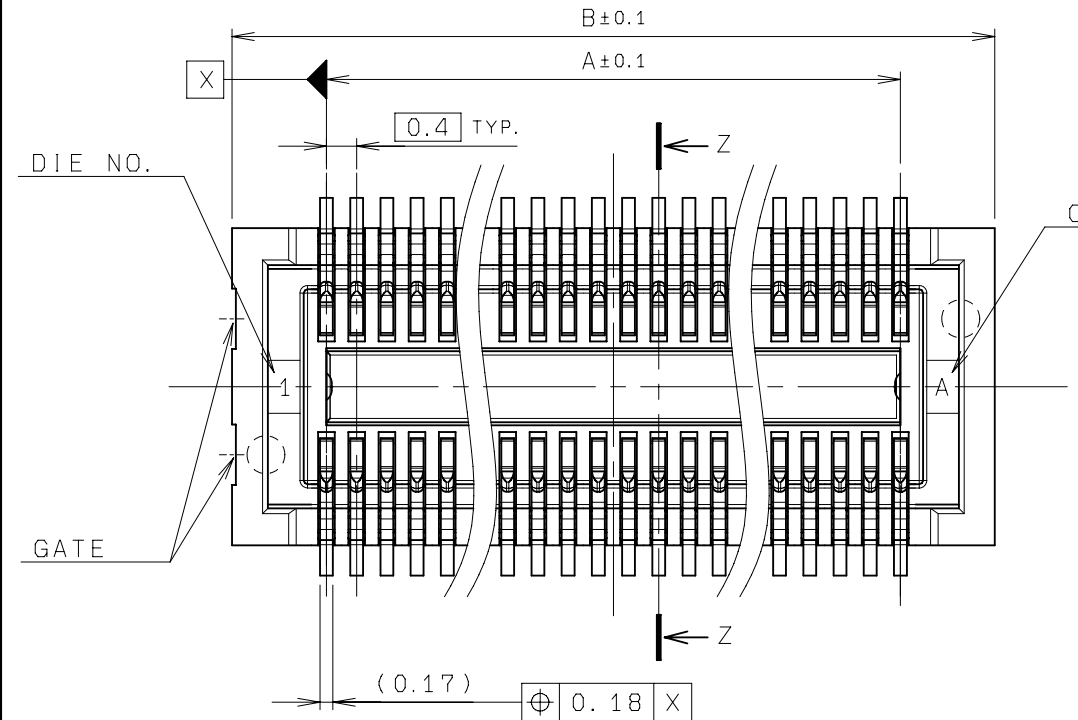

MOUNTING LAYOUT

ROHS規制対応
COMPLIANT WITH
ROHS REGULATIONS

TOLERANCE / 一般公差 (S)		PRODUCT SPEC / 製品規格							
X < 10 ±0.2				A	DCN-977	10-31-07			
10 ≤ X < 30 ±0.25		UNIT mm		O	EDN-890	8-09-06	A. TSUNEMURA	Y. SHIROYAMA	N. HAYASHI
30 ≤ X ±0.3		ANGLE 3RD		NO.	EDN/DCN	DATE	ISSUE	CHECKED	APPROVED
ANGLE / 角度 ±3°		SCALE 3/1		PART NAME / 品名					
		DATE 8-09-06		SERIES 5805 REC ASSY ST SMT					
DRAWN T. KOMATSU		DESIGNED A. TSUNEMURA		0.4mm PITCH BOARD TO BOARD H=1.0 (LCP)					
CHECKED Y. SHIROYAMA		APPROVED N. HAYASHI		PART NO. / 型番					
				20 5805 XXX 00X 829 H +					
KYOCERA		KYOCERA ELCO CORPORATION		DWG NO. / 図番		SHEET/REV			
				BJS 5805033		1/1 A			