

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		B	REVISED PER ECO-12-006972	23AUG2012	KH	JE

- 1

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 2

PHOSPHOR BRONZE
- 3





GLASS FILLED POLYESTER
- 4

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5

CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6


REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICATION
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

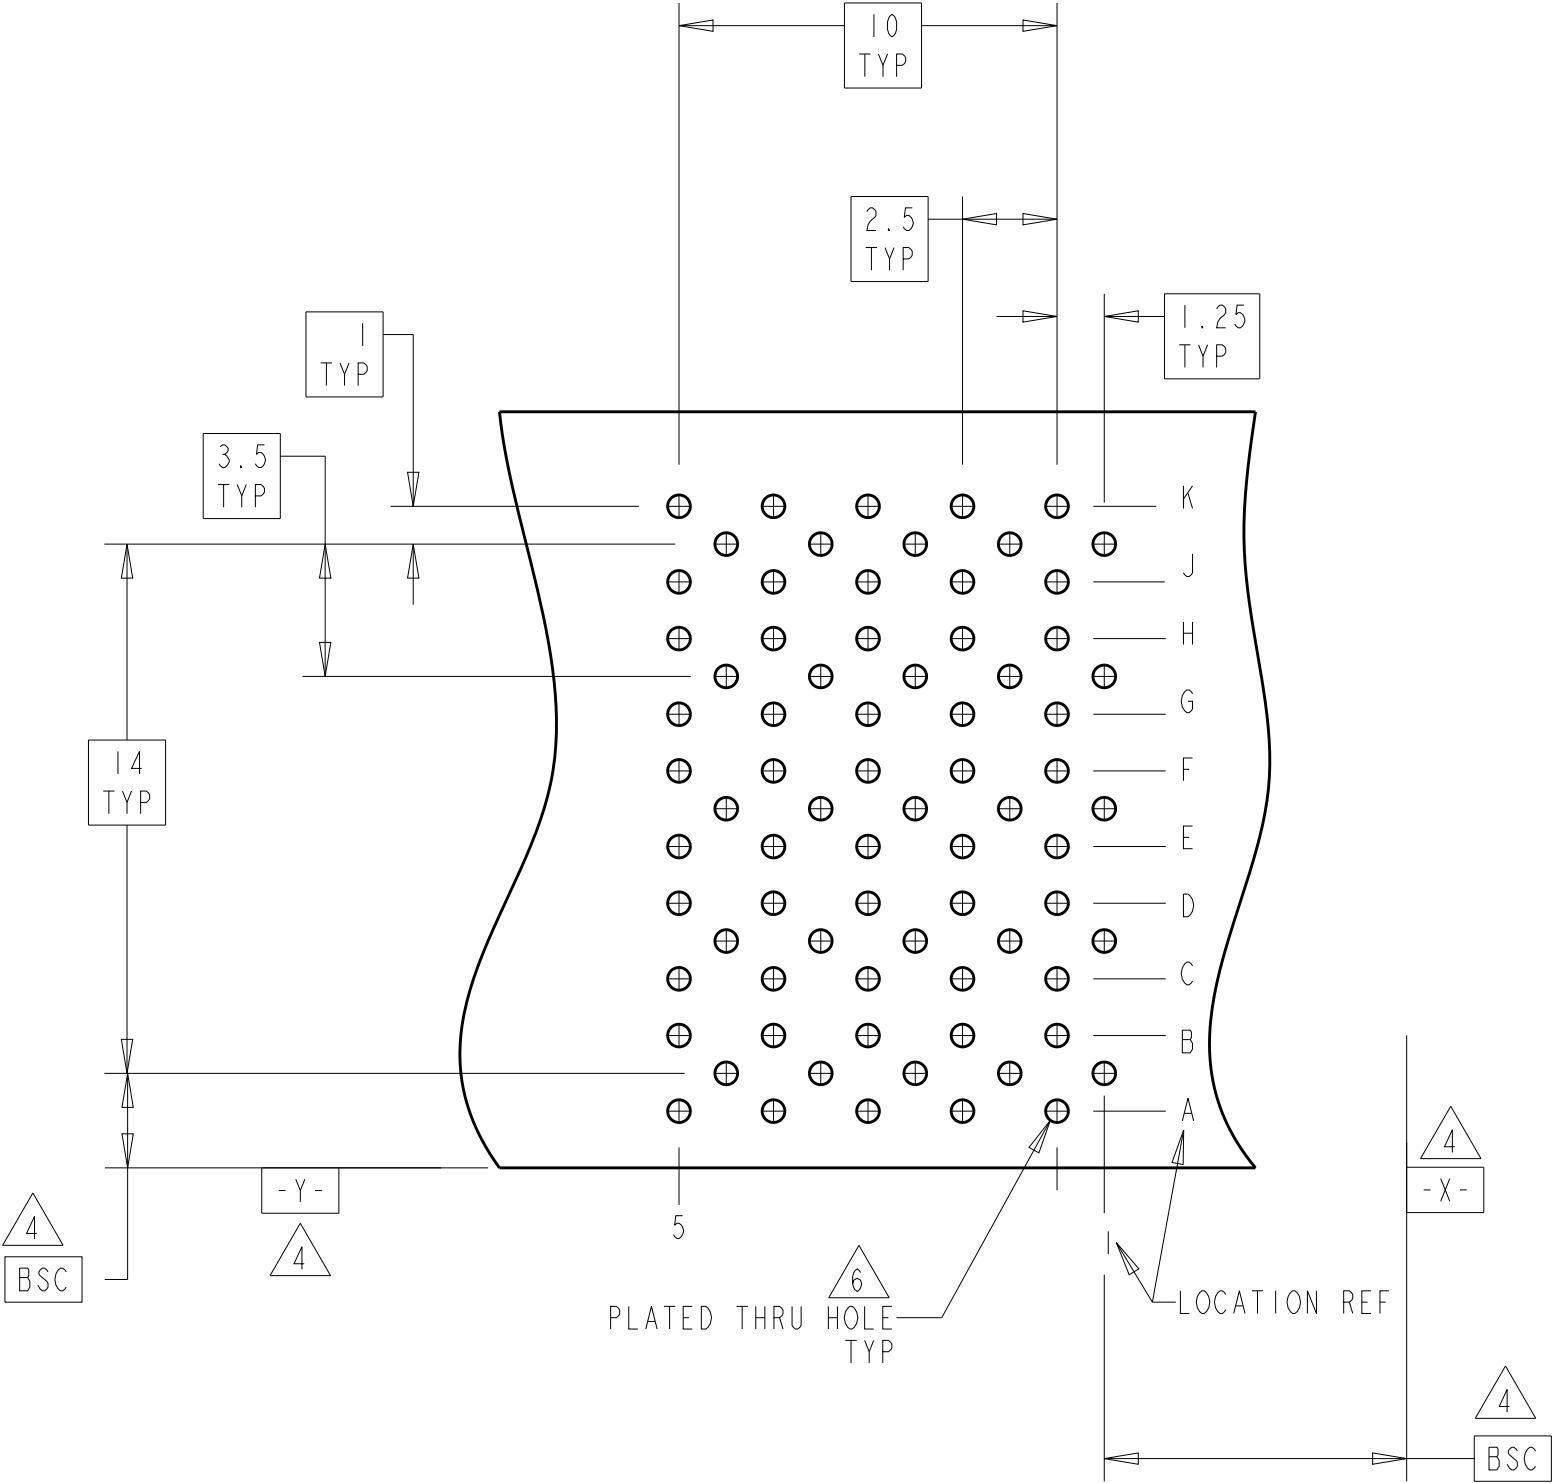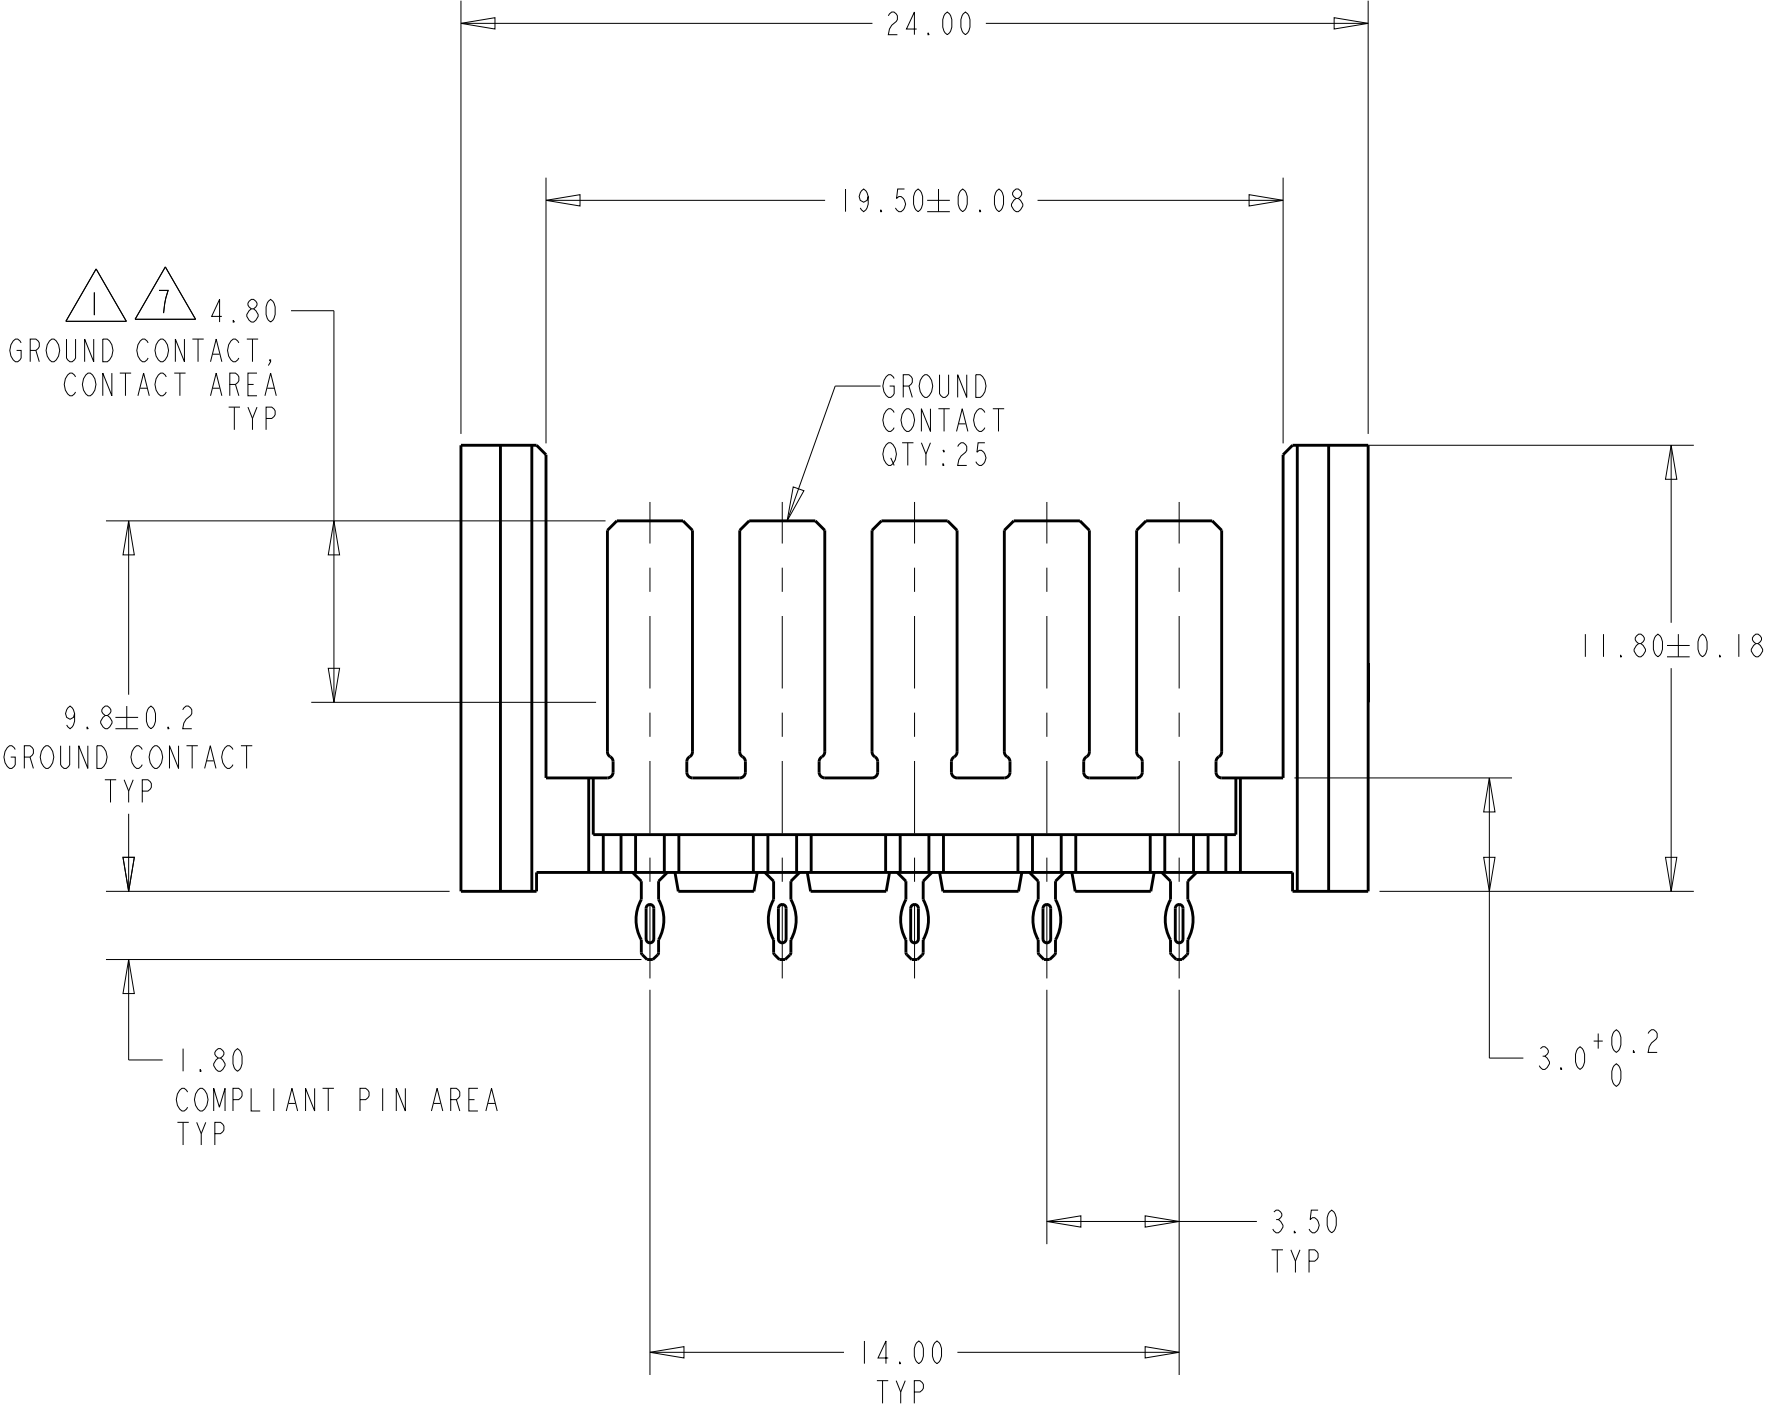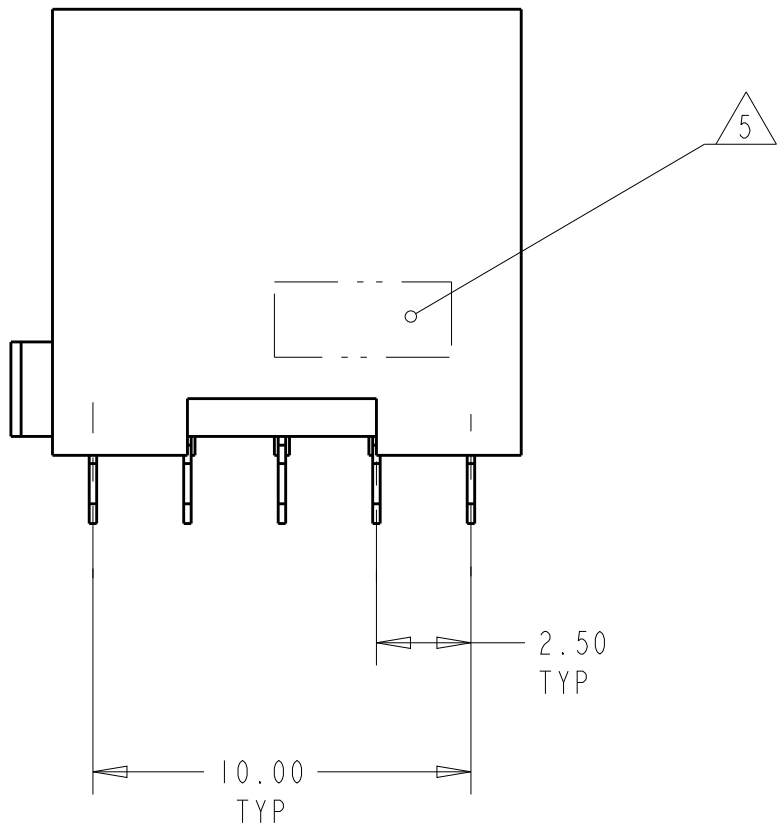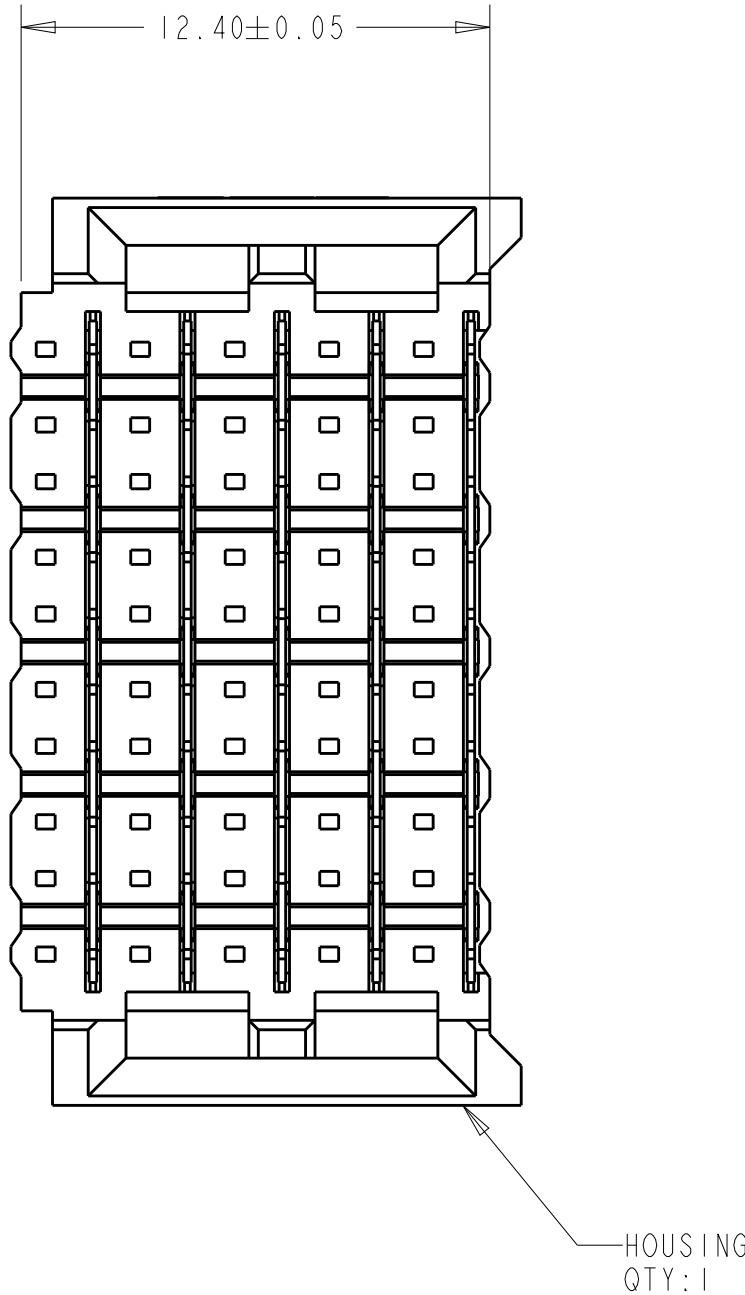

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5120750-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. CARBO	07DEC04	 TE Connectivity				
DIMENSIONS:			CHK R. PATTERSON	07DEC04					
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON	07DEC04	NAME	SHROUD ASSEMBLY, 50 POSITION, 10 ROW, BACKPLANE CONNECTOR, Z-PACK HS3			
	0 PLC	±	PRODUCT SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
	1 PLC	±	APPLICATION SPEC		A1	00779	C=5120750		
	2 PLC	±0.13	WEIGHT						-
	3 PLC	±	CUSTOMER DRAWING						
	4 PLC	±							
	ANGLES	±							
FINISH		GROUND CONTACT: 1							
MATERIAL HOUSING: 3	CONTACTS: 2		SCALE 5:1 SHEET 1 OF 1 REV B						