

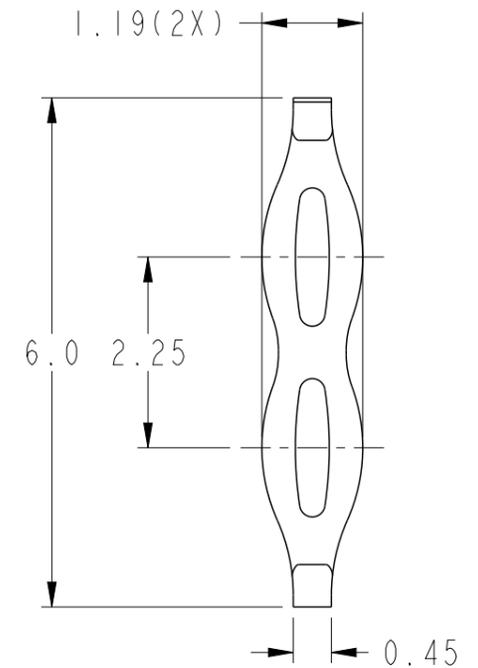
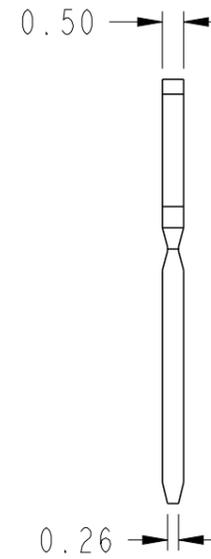


REELING DIRECTION
AFTER PLATING

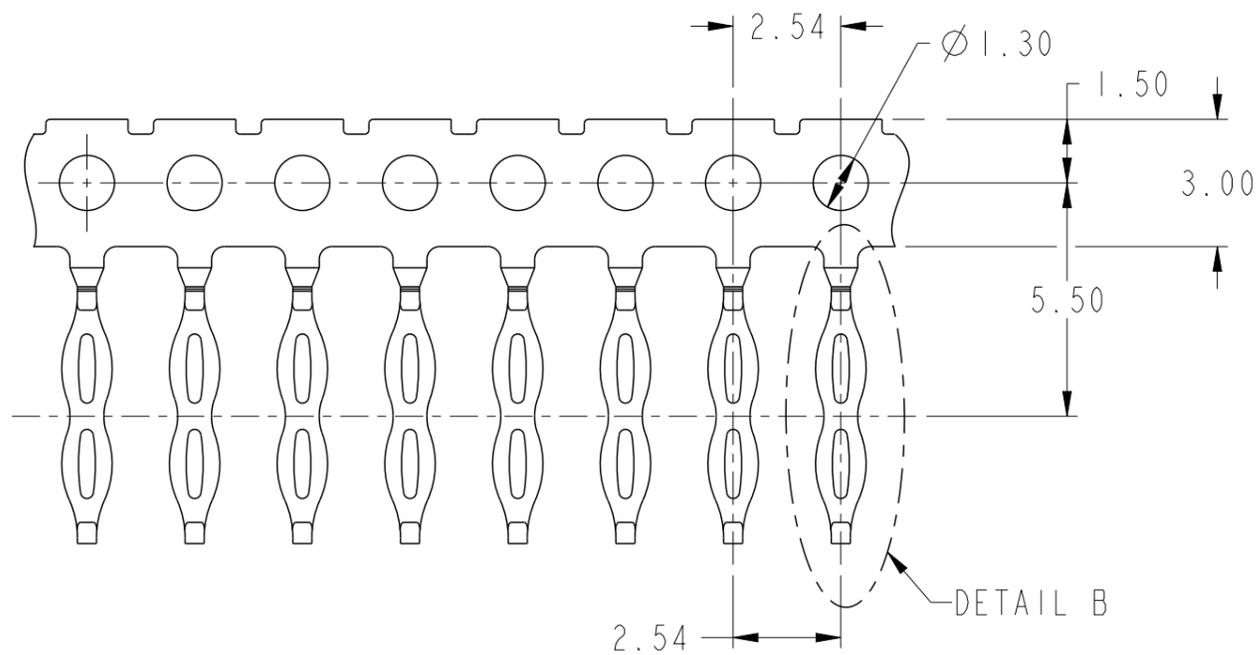

SCALE 12:1
DETAIL B

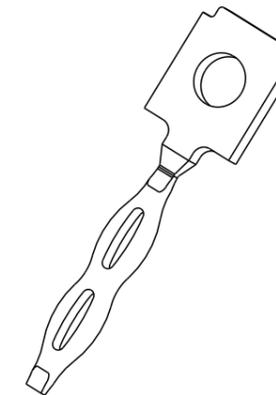

NOTES:

1. MATERIAL: COPPER ALLOY, THICKNESS; 0.5mm;
2. PLATING: "PLEASE SEE PLATING OPTION" UNDERPLATE 1.27 μm OF NICKEL
3. PART MUNBER CODE:
10132920- 10XLF

LEAD FREE
PLATING OPTION

1. 5.08 μm MIN OF SILVER OVER AREA UNDERPLATE NICKEL
2. 2.5 μm MIN OF TIN OVER AREA UNDERPLATE NICKEL

FINISHED HOLE DIAMETERS (MM)	
USE WITH PCB	USE WITH BUSBAR
1.015 \pm .076	1.041 \pm .05

spec ref	- SEE NOTE 1			dr	Li-Qing Lei	2016/05/09	projection	mm	size	A3	scale	6:1
tolerance std	ASME Y14.5M			eng	Li-Qing Lei	2016/06/22				ecn no	-	
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr	-	-	product family	rel level			Released	
surface	linear	0.X	± 0.1	Amphenol FCi	EON Terminal				dwg no	10132920		
		0.XX	± 0.10		cat. no.	Product - Customer Drw	sheet 1 of 1	rev		A		
ASME Y14.5M	angular	0°	$\pm 2^\circ$									