

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0554820819

Status:

Active

Overview:

mini_mi_ii

Description:

1.25mm (.049") Pitch Mini Mi II™ Wire-to-Wire Adapter, 8 Circuits, Lead-free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-55482-006 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Comments

Component Type

MolexKits

Overview

Product Name

Accessories

55482

For Panel Mounting

Adapter

Yes

mini_mi_ii

Mini Mi II™

Physical

Circuits (Loaded)

Color - Resin

Gender

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

Number of Rows

Packaging Type

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Temperature Range - Operating

8

Natural

Male

Brass

Tin

Tin

Nylon

1

Bag

40

1.00

40

1.00

-20°C to +80°C

Electrical

Current - Maximum per Contact

1.5A

Material Info

Reference - Drawing Numbers

Packaging Specification


Product Specification

Sales Drawing

SPK-55482-001

PS-55482-006

SD-55482-004

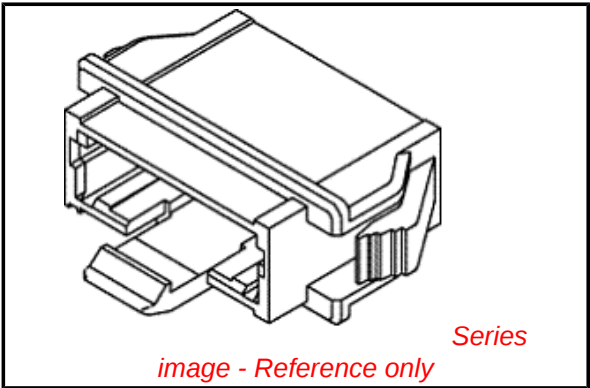

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.





Search Parts in this Series

55482Series


Use With

54596

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

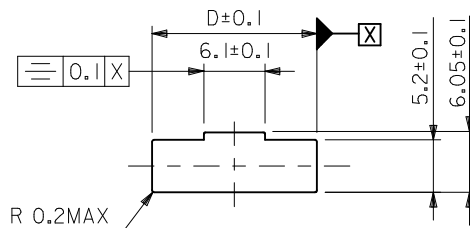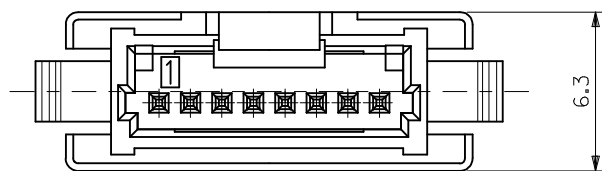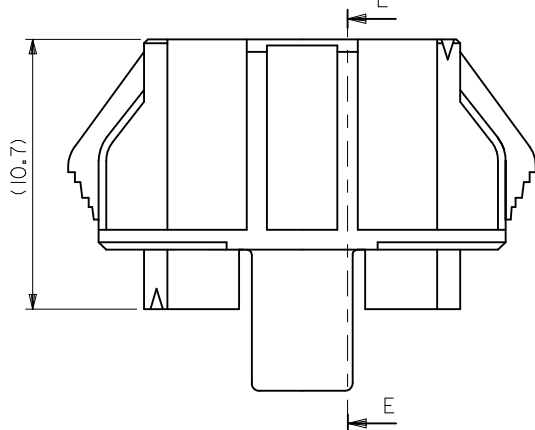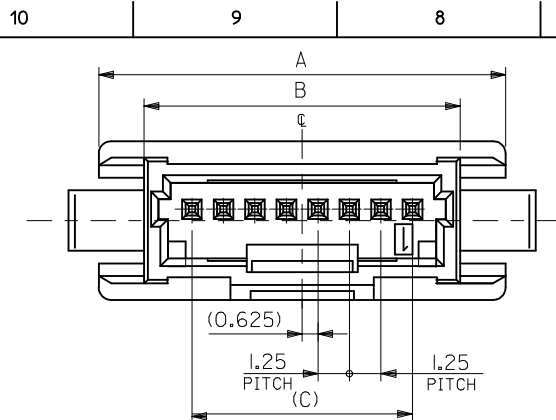

推奨パネル加工寸法 (SCALE:2-1)
RECOMMENDED PANEL CUT DIMENSION

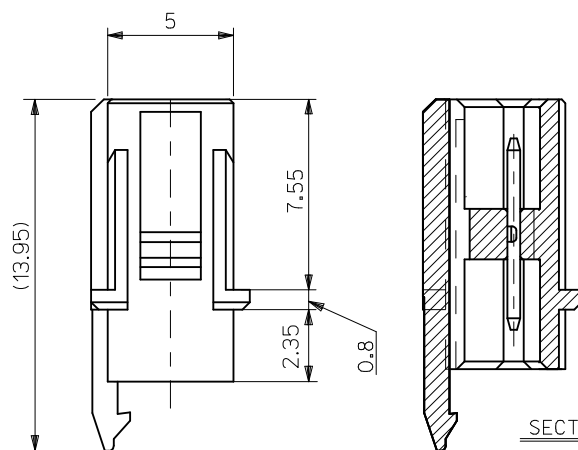

注記
NOTES

1. 材質
MATERIAL

ウェハー: ポリアミド、UL94-V0、ナチュラル色
WAFER: PA, UL94-V0, COLOR NATURAL
ピン: 黄銅、銅下地 錫メッキ
PIN: BRASS, PRE-TINNED

2. 嵌合相手
MATE WITH


リセプタクルアセンブリ: 54596-**1*
REC.ASS'Y: 54596-**1*
ピン: リン青銅、錫メッキ
PIN: PHOSPHOR BRONZE, PRE-TINNED

3. 本製品は 55482-**10 の鉛フリー品である。
THIS PRODUCT IS LEAD FREE OF 55482-**10.

4. ELV AND ROHS COMPLIANT.

中継コネクタ挿入方向
MATED & MOUNTED CONNECTOR

パネル打抜き側
PANEL PUNCH SIDE

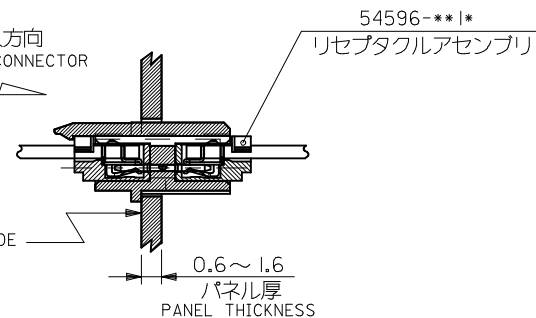

嵌合状態図
MATED & MOUNTED CONNECTOR

31.35	23.75	27.55	31.15	55482-2019	20
30.1	22.5	26.3	29.9	55482-1919	19
28.85	21.25	25.05	28.65	55482-1819	18
27.6	20	23.8	27.4	55482-1719	17
26.35	18.75	22.55	26.15	55482-1619	16
25.1	17.5	21.3	24.9	55482-1519	15
23.85	16.25	20.05	23.65	55482-1419	14
22.6	15	18.8	22.4	55482-1319	13
21.35	13.75	17.55	21.15	55482-1219	12
20.1	12.5	16.3	19.9	55482-1119	11
18.85	11.25	15.05	18.65	55482-1019	10
17.6	10	13.8	17.4	55482-0919	9
16.35	8.75	12.55	16.15	55482-0819	8
15.1	7.5	11.3	14.9	55482-0719	7
13.85	6.25	10.05	13.65	55482-0619	6
12.6	5	8.8	12.4	55482-0519	5
11.35	3.75	7.55	11.15	55482-0419	4
10.1	2.5	6.3	9.9	55482-0319	3
8.85	1.25	5.05	8.65	55482-0219	2

D	C	B	A	TRAY	CIRCUITS
---	---	---	---	------	----------

55482-**19	MODEL NO.	ORDER NO. オーダー番号
------------	-----------	------------------

REVISED EC NO: J2010-0170 DRWN:TKON CHKD:KASAKAWA APPR:NUKITA 2009/07/27 2009/07/28 2009/07/29	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY Y. SAKIYAMA	DATE 04/05/10	TITLE MINI MI2 1-ROW RELAY WAFER ASSY -LEAD FREE-			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. SASAO	DATE 04/05/10				
		30 OVER	± 0.3	APPROVED BY M. SASAO	DATE 04/05/10				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SD-55482-004		1 OF 1	
	REV A	SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						