
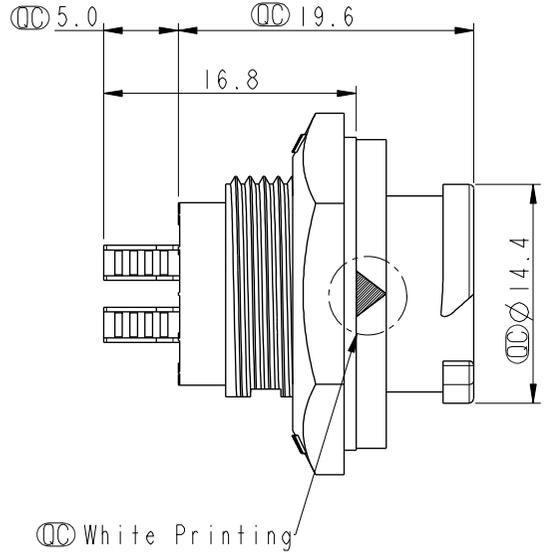
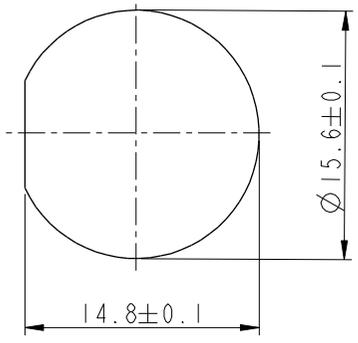
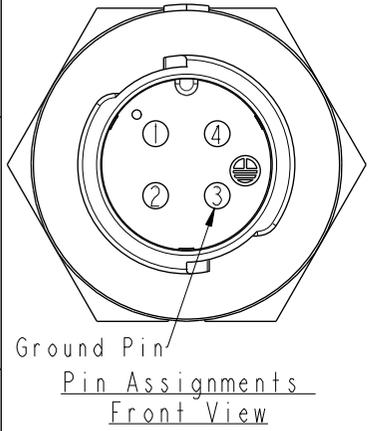
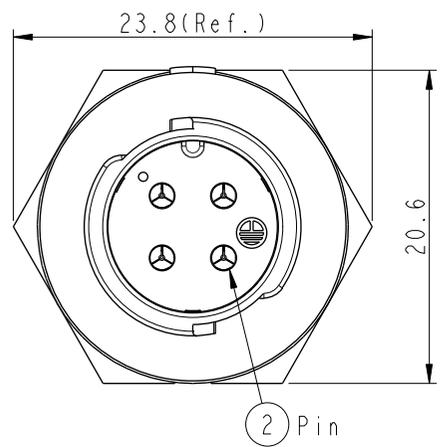
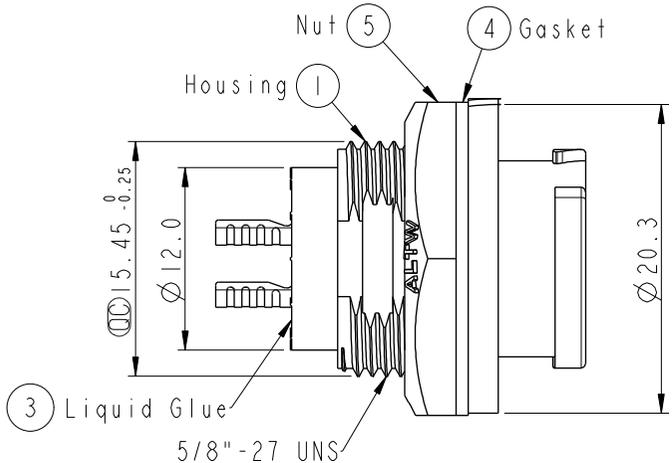


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	CI90411	2019/03/14	Vicky	Change Note

ALTW
CONFIDENTIAL
 2019-03-14
R&D DEPT.

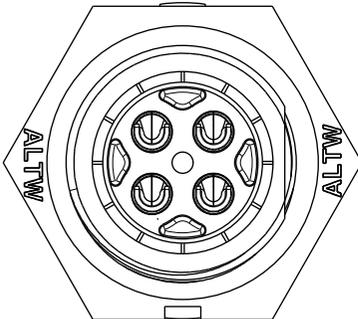

- Note:**
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Gasket: Rubber, Gray.
 - * Panel Thickness Max: 4.5mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm TOLERANCE X ±0.25	TITLE X Lok B-Size Receptacle Rear Fastened M Conn M 4 Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO BB-04RMMS-QC800P	DRAWN BY Vicky	DATE 2019-03-14
	SCALE 2:1	SIZE A4	SHEET 1 OF 1			DWG NO BB-04RMMS-QC800P	CHECKED BY Rita	DATE 2019-03-14
	REV. B	WC-REV. A.1	\varnothing : Inspection item	CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-14		
	2			3		4		5