



DATE	DESCRIPTION	REV.
7.16.14	CHANGE AS PER ECN 14-066 SPLIT C/M DRAWING TO 'C' & 'M'	A


FRONT SHELL

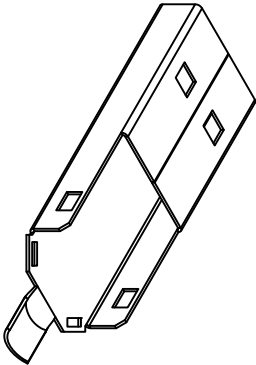



INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

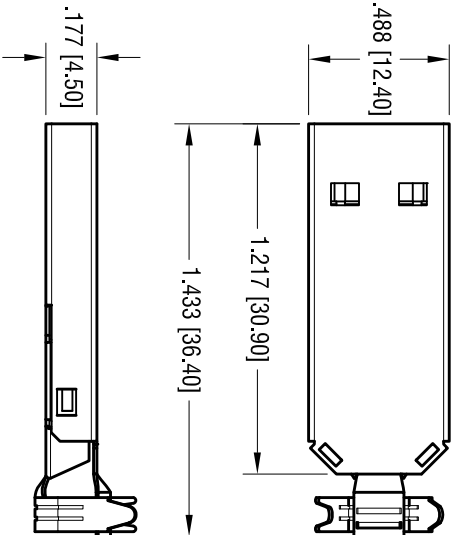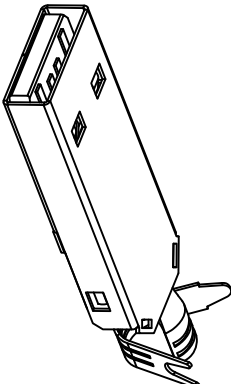

PLUG SPECIFICATIONS:

- SHELL: MAT'L- STEEL
- FINISH- NICKEL PLATE
- INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0 (COLOR- BLUE)
- CONTACT: MAT'L- PHOSPHOR BRONZE
- FINISH- GOLD FLASH OVER NICKEL

ELECTRICAL CHARACTERISTICS:

- RATED VOLTAGE: 30V (RMS)
- CONTACT CURRENT RATING: 1 Amp DC MAX.
- CONTACT RESISTANCE: 15m Ω min.
- DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
- OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)
- DURABILITY: 1500 CYCLES MIN.

KEYSTONE ELECTRONICS CORP. www.keystecoo.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900				
PART NAME USB 3.0 TYPE A PLUG KIT				
MATERIAL AS NOTED				
FINISH AS NOTED		DRN BY NT	DATE 4.07.10	
TOLERANCES DECIMAL $\pm .010$ [± 0.25] ANGULAR $\pm 1^\circ$		CODE C	APP'D LN	SCALE 1.5X
UNLESS OTHERWISE SPECIFIED		DWG NO. 947		

THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.