


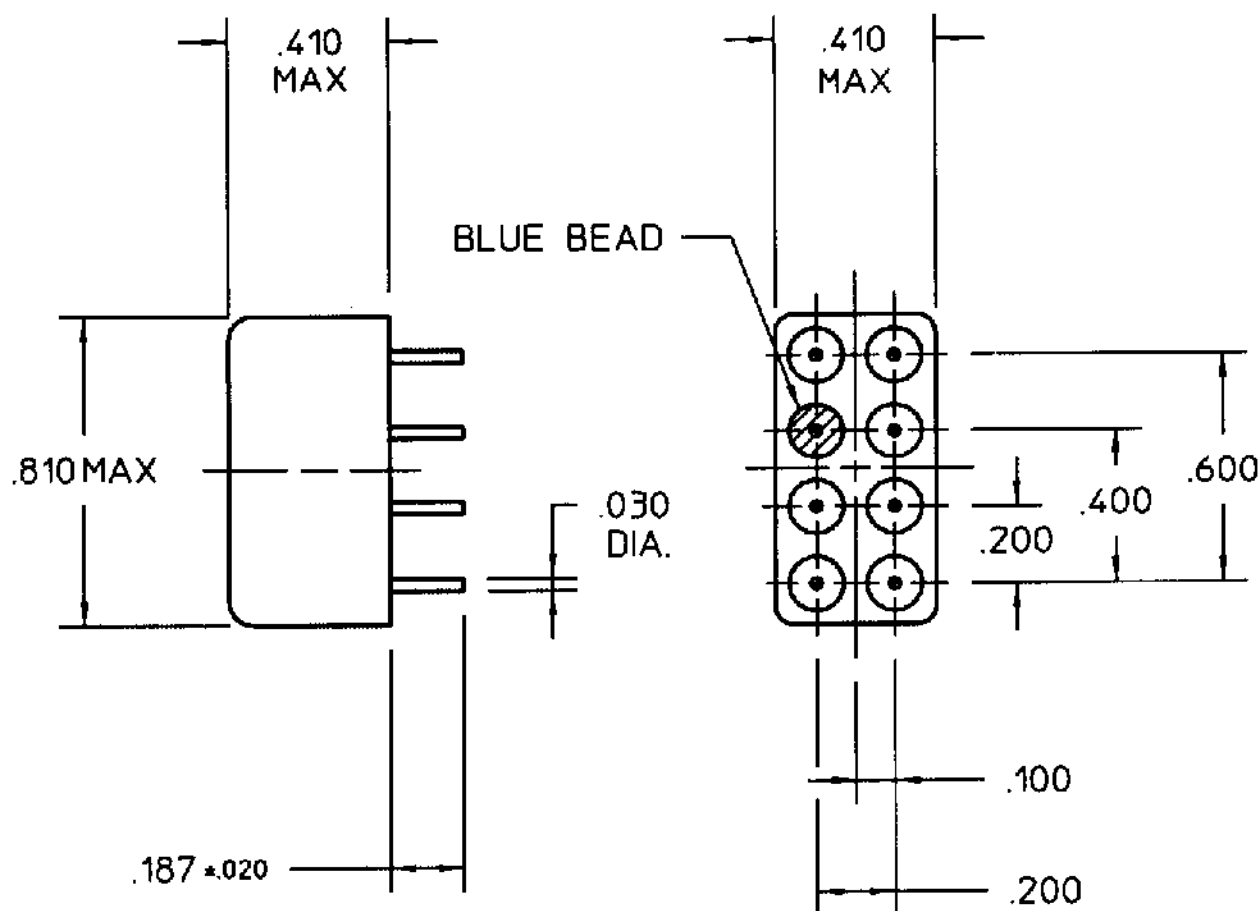

COIL: @ +25 °C

RESISTANCE 47 OHMS ± 10%

NOMINAL VOLTAGE 5.0 VDC

MUST OPERATE 2.2 VDC

MUST RELEASE 1.32 VDC MAX, 0.21 VDC MIN

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 20 g's

SHOCK 50 g's 11 MS. DURATION


TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX

RELEASE 5 MS MAX

CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET

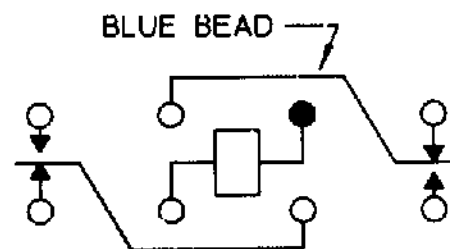

CONTACT RATING: 2 AMPS 28 VDC
0.1 AMP 115 VAC RESISTIVE 0.5 AMPS
28 VDC INDUCTIVE 100,000 OPERATIONS

DR. R.B. 11/7/94 CK. V7/09/98

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. OPL
CUST. NO. M39016/44-008M

TYPE "HMS" RELAY

HMS1201S108M