



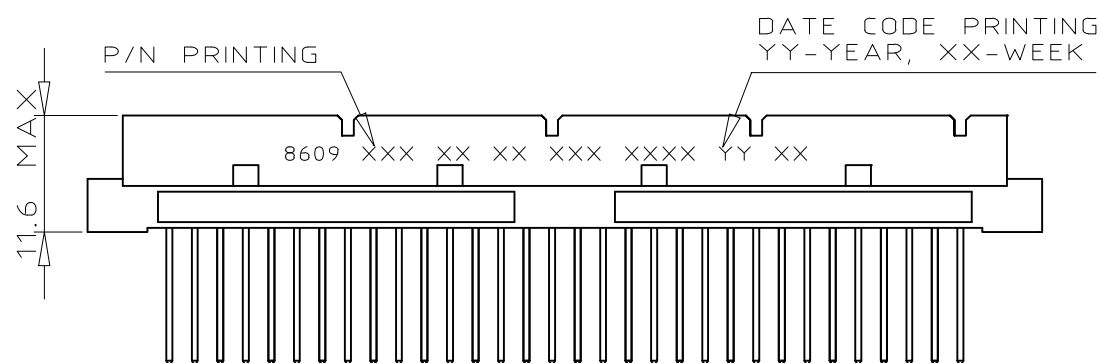


FCIconnect.com

Copyright FCI

DIMENSIONS

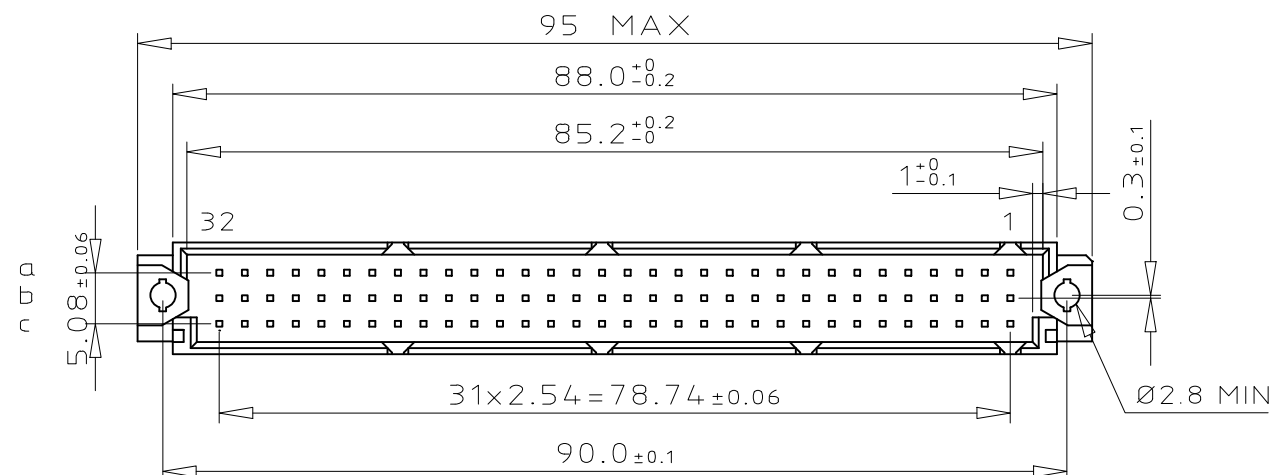


PCB LAYOUT

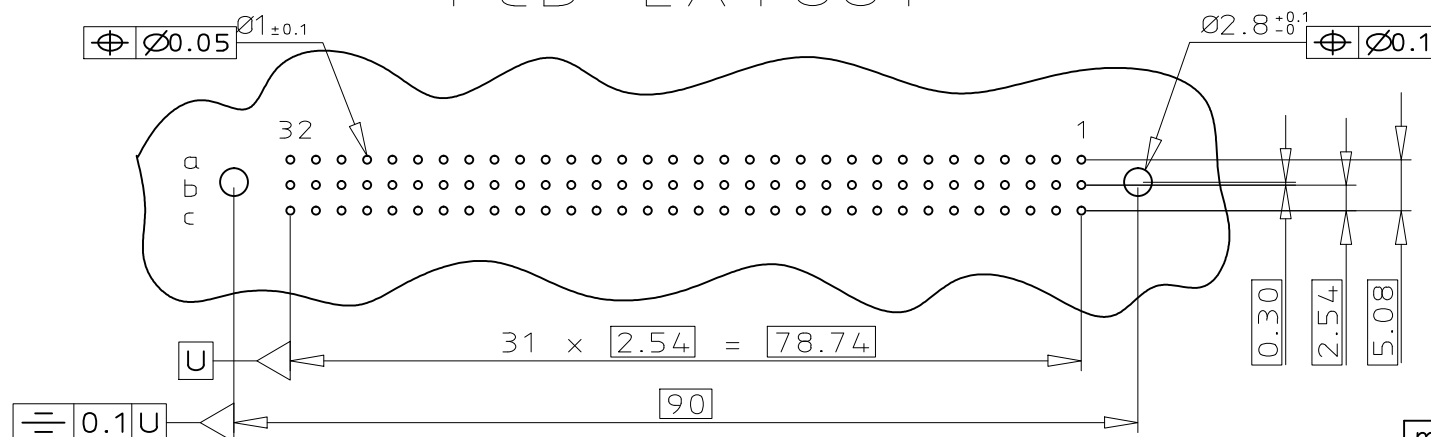

GENERAL CHARACTERISTICS & RoHS INFO

REFER DRAWING C-8609-0000A

TERMINATION

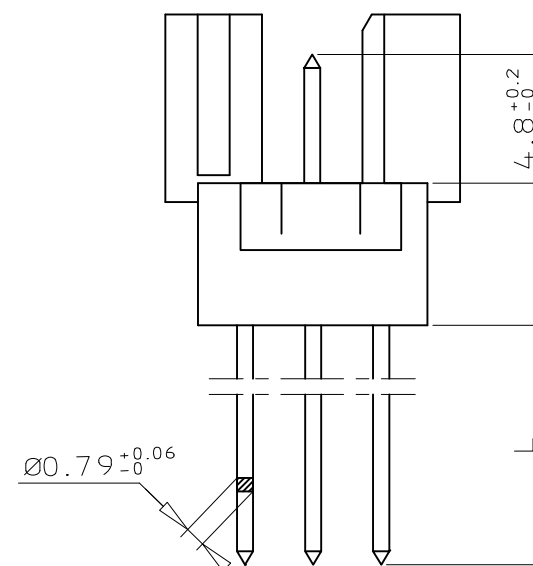

ORDERING INFORMATION

SERIES	8609	3	96	7	8	15	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	-	-	-	-	-	-	-	-	-	32
ROW a	b	c	-	-	-	-	-	-	-	96
ROW a	-	c	-	-	-	-	-	-	-	64
ROW a	-	c	-	-	-	-	-	-	-	32
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
REVERSE MOUNTING - STYLE R										
TERMINATION STYLE										
WIRE WRAP L=13.1 ±0.5										
WIRE WRAP L=18.2 ±0.5										
OPTIONS										
NO OPTION										
PERFORMANCE CLASS										
DIN 41612 CLASS 3										
DIN 41612 CLASS 2										
DIN 41612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
5.08 mm										
LEAD FREE VERSION										
ELF										

mat'l. code SEE DWG C-8609-0000A				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 8609			
ltr	ecn no	dr	date	tolerances unless otherwise specified						title DIN REVERSE HEADER			
A	104-0063	MINI	2004-09-17	angles	linear	0.X ±0.1				scale 3:2			
B	105-0089	MINI	2005-05-19			0.XX ±0.1							
C	105-0174	MINI	2005-09-27			0°±2° 0.XXX ±0.1							
D	106-0061	MINI	2006-05-31	dr	MINI K V		2004-09-17			dwg no		sheet 1 of 1	size
E	108-0146	KR	2008-10-21	enrg	RAKHEE G		2004-09-17			C-8609-2005		A3	
F	109-0200	KR	2009-09-22	chr	S ALOSIOUS		2010-12-04			type Product Customer Drawing			
G	110-0234	SAL	2010-12-04	appd	S ALOSIOUS		2010-12-04						
sheet index	revision sheet	G	1										